

Project:

Type:

Prepared By:

Date:



UPC: 019813834344



Features and Benefits

Produces rich and vibrant colors >90CRI

Energy efficient replacement for incandescent and halogen Reflector lamps

Constructed from durable plastic which lowers risk of breakage

Rated for use in enclosed and open fixtures in dry or damp locations

Frosted lens produces smooth diffuse light

Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs

ENERGY STAR Compliant, Title 20 Compliant

Dimmable with common dimmer types (check compatibility list)

Technical Specifications

Performance

Product Type:

Reflector

Input Wattage:

11W

Lumens (Nominal):

900lm

Efficacy:

82 lm/W

Color Accuracy (CRI):

90 CRI

L70 Lifespan:

25,000 Hours

Dimmable:

Yes, down to 10%

Construction

Bulb Shape:

BR40

Base Type:

E26

For Use Outdoors in Open Fixtures:

No

Other

Equivalency:

65W Incandescent

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of four (4) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

LED Characteristics

Color Temperature:

2700K Soft White

Technical Specifications

R9 Value:

>50

Electrical

Power Factor:

>0.9

Operating Temperature:

-25°C - 40°C

Input Voltage:

120V

Technical Specifications (continued)

Electrical

Operating Frequency:

60 Hz

Electrical Characteristics

Input Current @ 120V:

92mA

Flicker:

<30%

Compliance

UL Listed:

Yes

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star Model Number:

R10011


CEC Status:

Lawful for sale in California

Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|-----|-------------|------------|-------------|
| CASE | 6 | 15.7 | 10.6 | 7.2 |
| PALLET | 420 | 51.2 | 38.5 | 48.7 |

Dimension

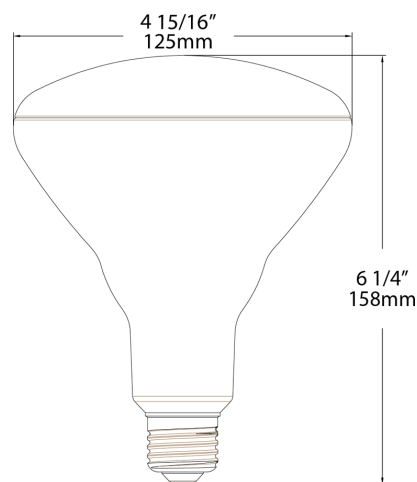

Light Distribution

