



New Integra Hood for Friendly Lighting. Awesome performance with quality and value from this compact 400 and 250 Watt HID flood.

Color: Bronze

Weight: 30.0 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	T15
Watts	200W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	15,000
Lamp Lumens	21,000
Efficacy	94.6 lm/W

Ballast Info

Type	CWA-HPF QT
120V	1.4/2.0A
208V	.8/1.2A
240V	.7/1.0A
277V	.6/.9A
Input Watts	222W

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Suitable for ground mounting.

Construction

Housing:

Precision die-cast aluminum

Reflector:

High quality anodized aluminum

Lens:

Tempered shock resistant glass

Lens Gasket:

Molded one-piece silicone in die cast retaining groove to remain in place during relamping

Finish:

Formulated for high durability and long-lasting color

EPA:

1.3.

Electrical

Socket:

Glazed porcelain 4kv pulse rated with nickel plated screw shell and spring contacts

Ballast Volts:

480 V

Starting/Operating Amps:

.4/.63A.

Pulse Start:

Pulse Start metal halide for increased lamp life, lumen maintenance, color uniformity and efficiency

Other


Patents:

Pat. D547,477.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

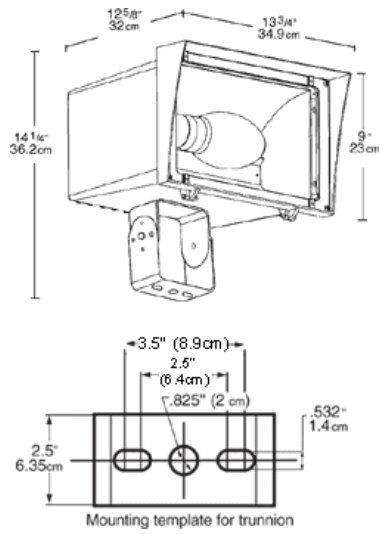

Features

- Optional glare hood, wire guard or polycarbonate shield
- Reflector designed for precise beam control
- Stainless steel screws included
- Long life lamp included
- Supplied with 3' of STW cord
- Rugged trunnion or slipfitter mounting
- New 2" Integra hood to reduce light trespass and glare