



Color: Bronze

Weight: 25.5 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	T15
Watts	200W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	15,000
Lamp Lumens	21,000
Efficacy	94.6 lm/W

Ballast Info

Type	CWA-HPF QT
120V	1.4/2.0A
208V	.8/1.2A
240V	.7/1.0A
277V	.6/.9A
Input Watts	222W

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from the ballast.

Construction

Housing:

Die-cast aluminum 1/2" NPS tapped holes top, both sides and back for conduit or photocontrol. Hinged refractor frame, Continuous silicone rubber gasket.

Reflector:

specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

Finish:

Formulated for high durability and long-lasting color

Electrical

Pulse Start:

Pulse Start metal halide for increased lamp life, lumen maintenance, color uniformity and efficiency

Other

Patents:

RC sensor and fixture designs are protected under Canadian and International Intellectual Property laws

Buy American Act Compliance:


RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Optical

BUG Rating:

B3 U2 G2

Dimensions

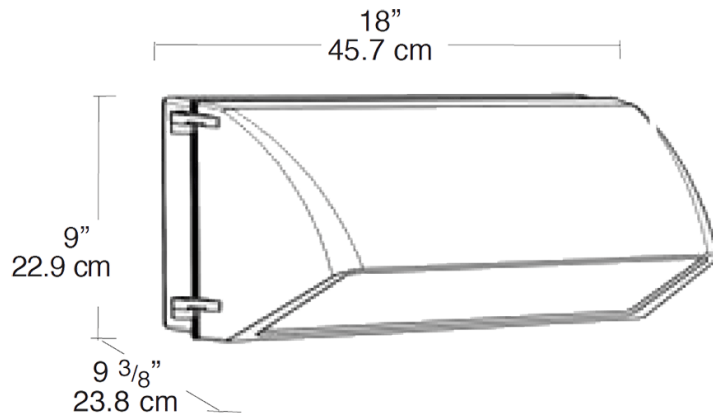

Features

- Hinged door frame opens and remains captive for easy relamping
- Precision die cast aluminum housing with durable polyester powder coating
- Drilling template for easy box mounting
- Silicone gasket remains in place during relamping
- Tempered glass refractor
- Long life lamp included