

Color: Bronze

Weight: 44.7 lbs

Project:	Type:
Prepared By:	Date:

Lamp Info		Ballast Info	
Type	ED18	Type	CWA-HPFQT
Watts	400W	120V	3.7/3.9A
Shape/Size	N/A	208V	2.2/2.2A
Base	N/A	240V	1.5/1.9A
ANSI	N/A	277V	1.6/1.7A
Hours	24,000	Input Watts	464W
Lamp Lumens	50,000		
Efficacy	107.8 lm/W		


Technical Specifications

- Compliance
- UL Listed:
- Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground.
- Construction
- Lens Gasket:
- EPDM gasket seals optical chamber preventing dirt and rust
- Housing:
- One-piece precision die-cast aluminum with die-cast door frame
- Reflector:
- Hydroformed reflector

- Finish:
- Formulated for high durability and long-lasting color
- Lens:
- Thermal, tempered shock resistant glass, 5/32" thick
- Mounting Arm:
- Mounts with two 3/8 threaded rods at 2" on center
- EPA:
- 1.8.

- Electrical
- Socket:
- Porcelain socket pulse rated 4kv, 1500 watts and 600 volts, reinforced with cat's eyes for added durability. Silicone and fiberglass #14 gauge socket leads rated for 200°C. Plated screw shell designed to resist corrosion with spring loaded center contact.
- Other
- Patents:
- The design of the ALX Area Light is protected by U.S. patent D591,445, Canada Patent D127,045, Mexico Patent 28577 and patents pending in the U.S., China and Taiwan.
- Buy American Act Compliance:
- RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

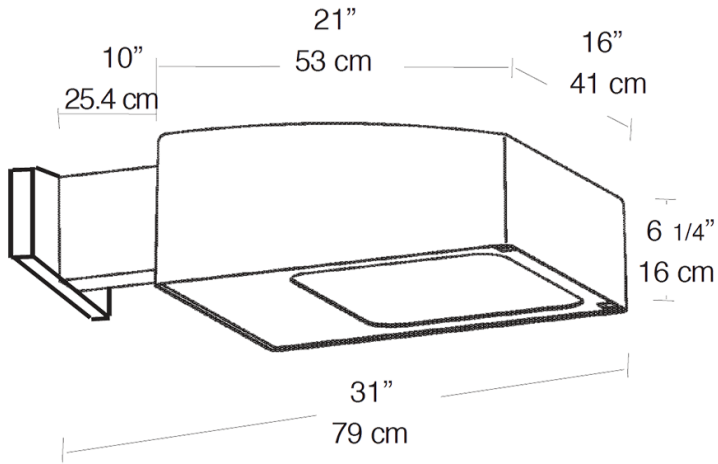

## Features

- Field rotatable optics
- Custom Hydroformed reflector
- Sleek smaller volume design lowers EPA
- Sealed optical chamber
- Stainless steel external hardware
- Silicone lamp retainer keeps lamp in socket
- Lamp supplied