



Project:	Туре:
Prepared By:	Date:

Lamp Info	mp Info Ballast Info			
Туре	Triple	Type	Electronic	
Watts	32W	120V	0.3A	
Shape/Size	N/A	208V	N/A	
Base	N/A	240V	N/A	
ANSI	N/A	277V	N/A	
Hours	12,000	Input Wat	Input Watts 36W	
Lamp Lumen	s 2,400			
Efficacy	66.7 lm/W			

# **Technical Specifications**

# Compliance

# **UL Listed:**

Suitable for wet locations

## **Electrical**

#### Photocell:

120V Button photocell included. Photocell is only compatible with 120V.

### Socket:

CFL Plug in type, GX24q-4 base

# Construction

### Construction:

Die cast aluminum housing and door. Tether connects door to housing for safety.

## Reflector:

High quality hydroformed semi-specular aluminum

#### Finish:

Formulated for high durability and long-lasting color

# **Effective Projected Area:**

EPA = 0.8 With House-side shield = 1.5

## Other

#### Patents:


The design of the AJ Area Light is protected by U.S. Patents D579,140, D579,141, D591,445, Canada patents D127,031, D127,040, D127,045, China patents ZL200830143714.3, ZL200830143713.9, ZL200830143712.4, Mexico patents 27395, 28572, 28577 and Taiwan patents D129,808 and D131,622

# **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

# AJF32FXQT/PC



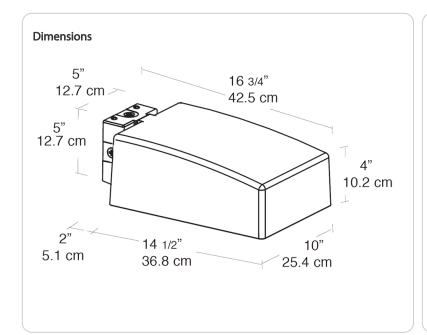

### **Features**

For use at 10' - 15' mounting height

Sleek design for low EPA

Heavy duty die cast aluminum housing and door

4kv pulse rated socket

Hydroformed reflector

Silicone gasket seals optical compartment

Lamp supplied