



Color: Bronze

Weight: 7.9 lbs

Project:

Type:

Prepared By:

Date:

**Driver Info**

Type	Constant Current
120V	0.50A
208V	0.30A
240V	0.28A
277V	0.25A
Input Watts 57.8/58.4/59W	

**LED Info**

Watts	60W
Color Temp	3000K/4000K/5000K
Color Accuracy	80 CRI
L70 Lifespan	100,000 Hours
Lumens	7780/8583/8084
Efficacy	134.7/146.9/136.9 lm/W

**Technical Specifications****Field Adjustability****Field Adjustable:**

Color temperature selectable by 3000K, 4000K and 5000K

**Compliance****UL Listed:**

Suitable for wet locations

**IESNA LM-79 & IESNA LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PLQGNPP3AB7A

**Performance****Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**LED Characteristics****LEDs:**

Long-life, high-efficiency, surface-mount LEDs

**Electrical****Driver:**

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.50A, 208V: 0.30A, 240V: 0.28A, 277V: 0.25A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**Photocell:**

120-277V selectable photocell that can be turned on and off.

**Note:**

All values are typical (tolerance +/- 10%)

**Construction****IP Rating:**

Ingress protection rating of IP65 for dust and water

**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 50°C (122°F)

**Housing:**

Die-cast aluminum

Technical Specifications (continued)


Construction

- Lens:**  
Tempered glass
- Mounting:**  
Wall mount
- Finish:**  
Formulated for high durability and long-lasting color

- Green Technology:**  
Mercury and UV free. RoHS-compliant components.
- Other**
- 5 Yr Limited Warranty:**  
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).
- Equivalency:**  
Equivalent to 250W Metal Halide

**Buy American Act Compliance:**  
RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

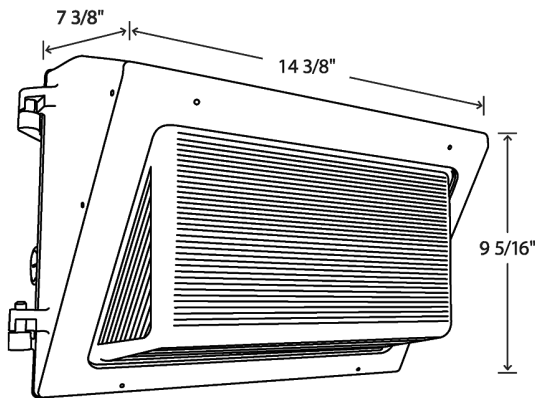

Features

- DLC Premium listed
- IP65 Rated
- 100,000-Hour LED lifespan
- 5-Year, Limited Warranty

Ordering Matrix

Family	Wattage
WP2FA	60
	29 = 29W
	40 = 40W
	60 = 60W
	80 = 80W