


Project:

Type:

Prepared By:

Date:

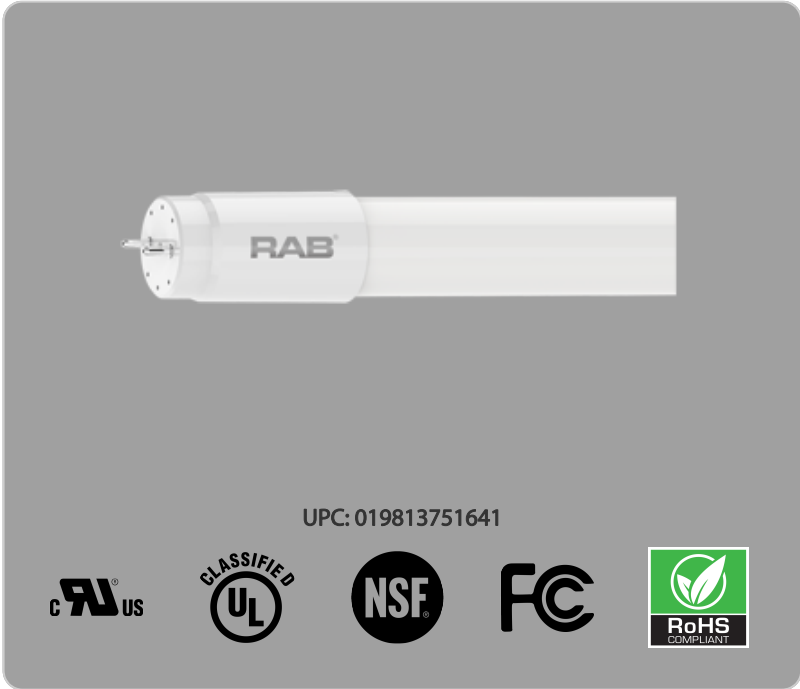

Features and Benefits

Replacement for conventional fluorescent T8 and T12 linear tubes

Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast

Approximately 50% more energy efficient when compared to Fluorescent T8 lamps

Works with non-shunted sockets ONLY

Separate wiring harness and socket kit accessory available

50,000 hour Lifespan

Rated for use in enclosed and open fixtures in dry or damp locations

Diffused frosted lens will maintain the same light quality over time

Instant on full brightness

Environmentally friendly, no mercury used

NSF Listed: NSF/ANSI Standard 2 - Food Equipment - Splash Zone (Not for Direct Food Zone without additional fixture considerations)

Technical Specifications		
<div>Performance</div> <div>Product Type:</div> <div>Linear</div> <div>Input Wattage:</div> <div>15W</div> <div>Lumens (Nominal):</div> <div>1650lm</div> <div>Efficacy:</div> <div>110 lm/W</div> <div>Color Accuracy (CRI):</div> <div>82 CRI</div> <div>L70 Lifespan:</div> <div>50,000 Hours</div>	<div>Dimmable:</div> <div>No</div> <div>Construction</div> <div>Material:</div> <div>Glass</div> <div>Bulb Shape:</div> <div>T8</div> <div>Nominal Length:</div> <div>4FT</div> <div>Finish:</div> <div>Frosted</div> <div>Base Type:</div> <div>G13</div>	<div>Beam Angle:</div> <div>240°</div> <div>For Use Outdoors in Open Fixtures:</div> <div>No</div> <div>Other</div> <div>Equivalency:</div> <div>32W Fluorescent</div> <div>Warranty:</div> <div>RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.</div> <div>LED Characteristics</div> <div>Color Temperature:</div> <div>3500K Neutral White</div>

Technical Specifications (continued)

Electrical	Installation	NSF Listed:
Operating Temperature: -20°C - 45°C	Installation Type: Type B, Single Ended wiring	Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.
Input Voltage: 100-277V	Compliance	CEC Status: Lawful for sale in California
Operating Frequency: 50/60Hz	UL Recognized: Yes	Application: Suitable for damp locations and totally enclosed fixtures.
	UL Classified: Yes	


Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
48.8 x 22.4 x 2.0	4

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	25	49.2	7.9	7.3
PALLET	30	49.2	39.4	48.8

Wiring Diagram

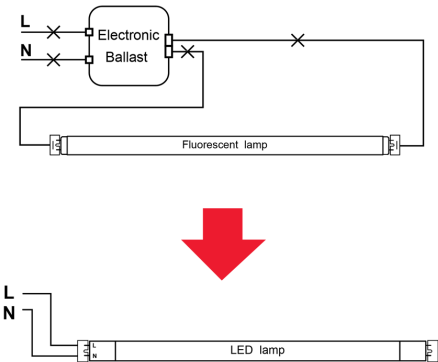

Dimension

