



Science.
Applied to Life.™

Insulation for smaller, lighter, and more efficient motors.


Electrical Insulations for Motors and Generators

As regulatory requirements for more energy-efficient motors increase, 3M is responding with insulation systems that can offer higher thermal conductivity and more corona resistance.

Unlike many insulating materials, those from 3M enable efficient, compact and reliable motor designs. Additionally, many 3M solutions are designed for making the manufacturing process efficient with good yields for both new motor OEMs and motor repair.

Use this guide to see where 3M solutions can help protect your motor and generator products.

Let 3M Provide Solutions to Critical Insulation Challenges in Motors and Generators

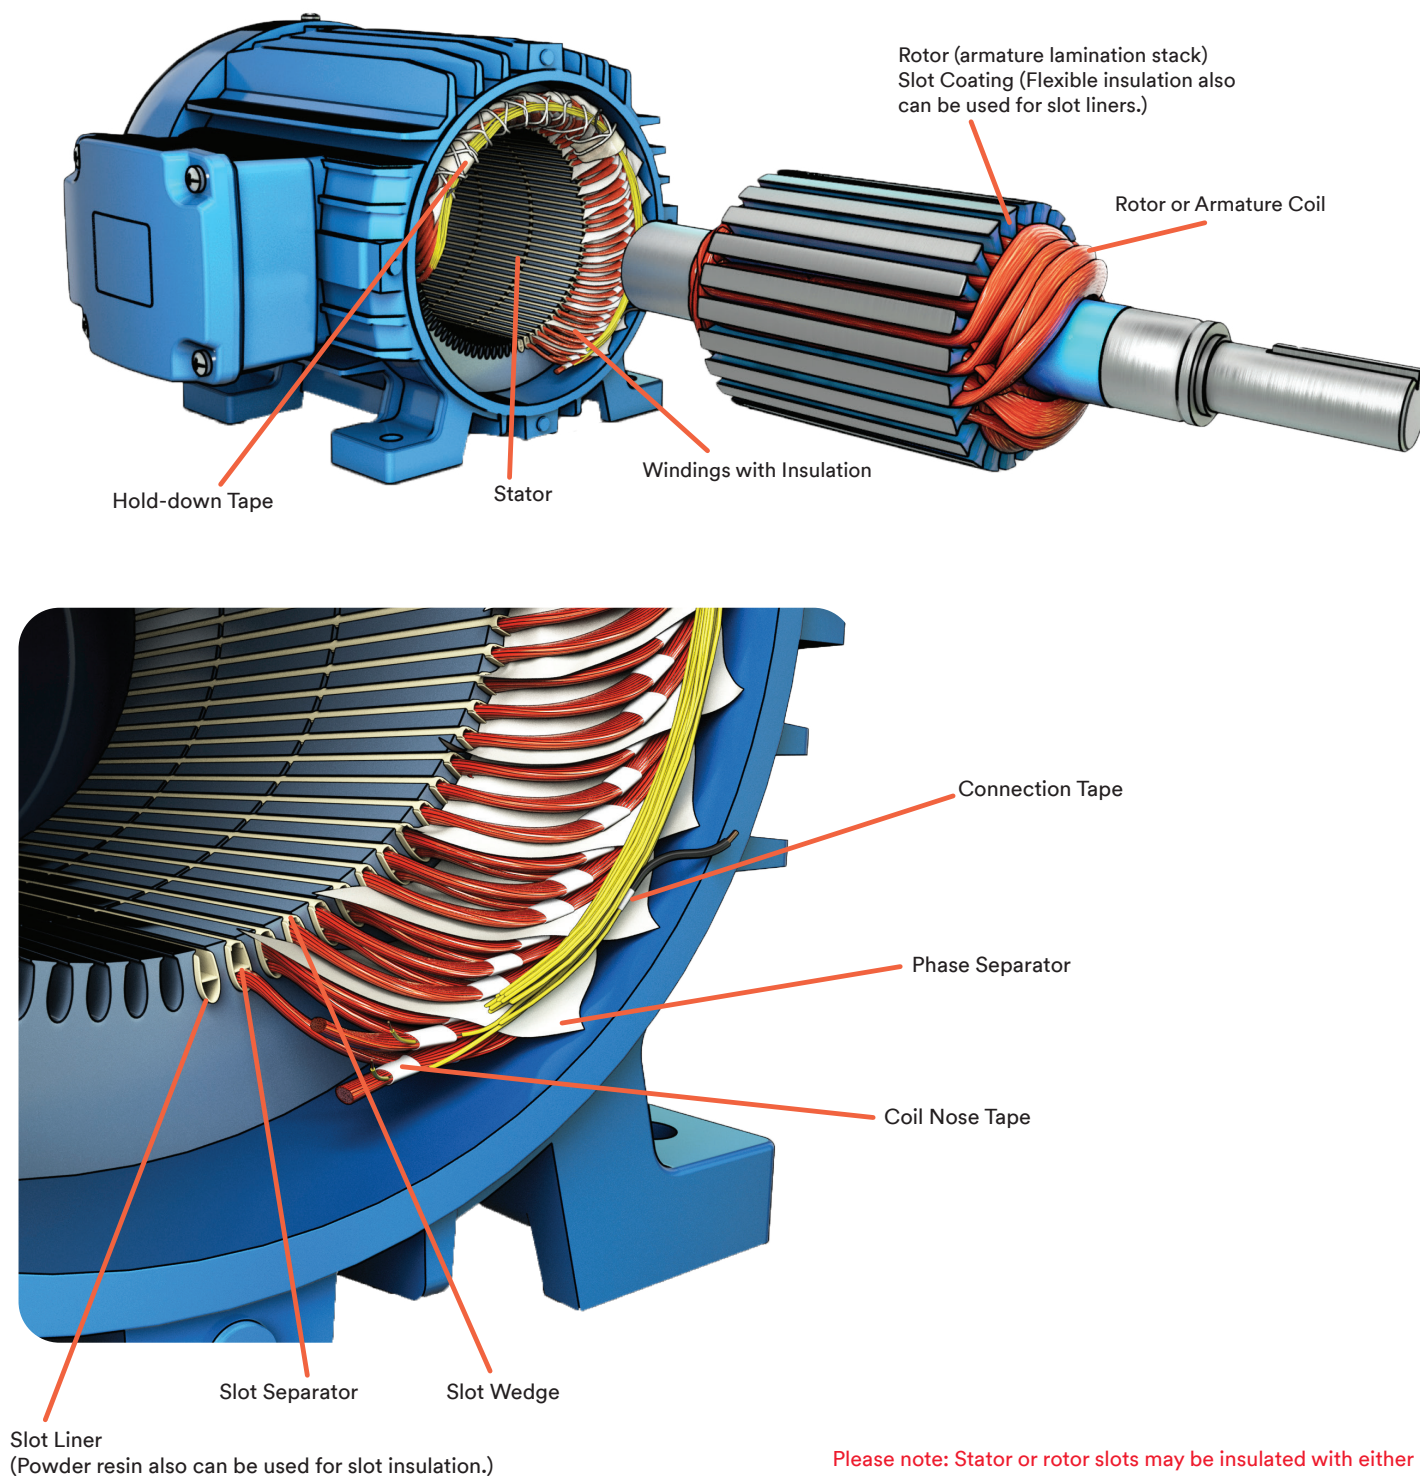

Product Solutions for Motor Applications

Application	Scotchcast™ Resins				Flexible Insulation			Tapes					Motor Lead Kit			Copper Lugs
	260 ^B , 263 ^B	260 ^B , 263 ^B , 265 ^B	265 ^B	8, 9, 10, 208, 210	TufQUIN TFT ^F	CeQUIN ^H	DMD ^G	PET Tapes ^I	Composite Film Tapes 44 or 44HT ^{I,J}	Reinforced Tapes 46, 1046, 1039, 1139 or 1339 ^{I,K}	Glass Cloth Tapes 69 ^O , 90, 27 or 79 ^L	Polyimide Tapes 92 ^N or 1205 ^{M,L}	5300-5304 (pigtail) or 5311-5314 (inline)	5316-5319 (pigtail)	5321-5324 (pigtail), 5331-5334 (inline) or 5381-5384 (pigtail) ^P	30000 Series
Rotor Slot Coating	✓															
Stator Slot Coating	✓															
Starter Coil Coating																
End Winding Coating		✓														
Impregnating			✓ ^C	✓ ^E												
Lamination Bonding			✓ ^D													
Slot Liner Insulation					✓		✓									
Slot Separator (H insulator or inner wedge)					✓		✓									
Slot Wedge Insulation					✓		✓									
Traction Motor Interpole (coil) Insulation						✓										
End Winding Phase Separator Insulation					✓	✓	✓									
Coil-nose Tape (Y-connection)								✓			✓					
Connection Tape (lead hold down tape)								✓	✓		✓					
End Turn Hold Down Tape									✓	✓		✓				
Banding Tape (bundling)								✓	✓	✓	✓	✓				
Motor Lead Connection Insulation, ≤1 kV													✓			
Motor Lead Connection Insulation, 5-8 kV unshielded cable														✓	✓	
Motor Lead Connection Insulation, 5-8 kV shielded cable															✓	
Motor Lead Lug																✓

NOTES

- A - Can be coated with electrostatic coating process
- B - Can be coated with either hot-dip or hot-spray coating processes
- C - Recommended for ≥16 AWG magnet wire
- D - Solvent solution application
- E - Can be brushed or troweled into slots for motor repair
- F - UL® Systems Recognition up to Class 200°C (N) with the smoothest finish for auto insertion
- G - DMD 70 & DMD 100 have UL® Systems Recognition up to Class 155°C (F) and DMD 180 has UL® Systems Recognition up to Class 180°C (H)
- H - CeQUIN X is best when applying B-stage
- I - Suitable up to Class 130°C (B)
- J - Has better resin absorption than PET tapes
- K - High holding strength
- L - Best for higher temperature class motors or those requiring higher dielectric strength
- M - Suitable up to Class 150°C
- N - Suitable up to Class 180°C (H)
- O - Suitable up to Class 200°C (N)
- P - Reusable boot allows for periodic field testing

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product in accordance with all applicable instructions and with appropriate safety equipment, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE.

If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement or repair of the 3M product or refund of the purchase price. Warranty claims must be made within one (1) year from the date of 3M's shipment.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by applicable law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

Disclaimer: 3M industrial and occupational products are intended, labeled, and packaged for sale to trained industrial and occupational customers for workplace use. Unless specifically stated otherwise on the applicable product packaging or literature, these products are not intended, labeled, or packaged for sale to or use by consumers (e.g., for home, personal, primary or secondary school, recreational/sporting, or other uses not described in the applicable product packaging or literature), and must be selected and used in compliance with applicable health and safety regulations and standards (e.g., U.S. OSHA, ANSI), as well as all product literature, user instructions, warnings, and limitations, and the user must take any action required under any recall, field action or other product use notice. Misuse of 3M industrial and occupational products may result in injury, sickness, or death. For help with product selection and use, consult your on-site safety professional, industrial hygienist, or other subject matter expert. For additional product information, visit www.3M.com.



Electrical Markets Division
13011 McCallen Pass, Bldg. C
Austin, TX 78753-5380

Phone 800.676.8381
Fax 800.828.9329
www.3M.com/oem

Please recycle. Printed in USA © 3M 2025.
All rights reserved. 80-6016-0773-4