

Add lighting and ventilation to your room -  
with the look of an ordinary recessed light.

## FEATURES

### BAFFLE:

- Polymeric construction with matte white finish
- Recessed styling, mounts flush with finished ceiling

### LAMP:

- Accepts any one of these bulbs (bulb not included):  
75W, R30, BR30, PAR30L, or PAR30LN

### BLOWER:

- Plug-in, permanently lubricated, motor
- Dynamically balanced centrifugal blower wheel for quiet, efficient performance
- Low RPM for quiet operation
- Selectable CFM - Factory-set at 50 CFM - Can be set to 80 CFM

### HOUSING:

- Fits in 2" x 8" construction
- Rugged, galvanized steel construction
- 4" round, polymeric duct connector with 2" tapered sleeve and no metallic clatter
- Adjustable mounting brackets span up to 24"

### CONTROLS:

Designed for use with this product  
(purchase separately)

- Model 59V (Ivory) / 59W (White) - 60-minute time control
- Model 61V (Ivory) / 61W (White) - 15-minute time control
- Model 69VL (Ivory) / 69WL (White) - One rocker switch with "on" indicator light
- Model 269VL (Ivory) / 269WL (White) - One rocker switch with "on" indicator light and one non-lit rocker switch
- Model 68V (Ivory) / 68W (White) - Two rocker switches - fits in single-gang box

U.L. Listed for use over bathtubs and showers when connected to a GFCI protected branch circuit and used with a PAR30L or PAR30LN bulb.

U.L. Listed for use in insulated ceilings (TYPE I.C.)

3-Year Warranty

## SPECIFICATIONS

| MODEL | VOLTS | AMPS** |
|-------|-------|--------|
| 744L  | 120   | 1.3    |



\*\* Total  
Connected  
Load



| SETTING | STATIC PRESSURE | CFM | SONES | FAN WATTS | DUCT     |
|---------|-----------------|-----|-------|-----------|----------|
| 80      | 0.1             | 80  | 2     | 27.4      | 4" Round |
|         | 0.25            | 65  |       |           |          |
| 50      | 0.1             | 50  | 0.3   | 10.7      |          |
|         | 0.25            | 35  |       |           |          |


# Recessed Fan / Light

## MODEL 744L

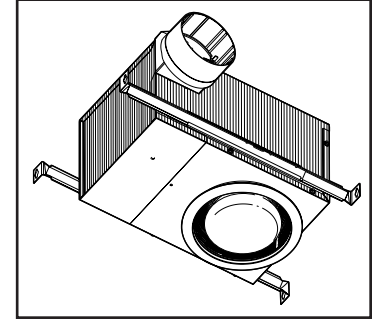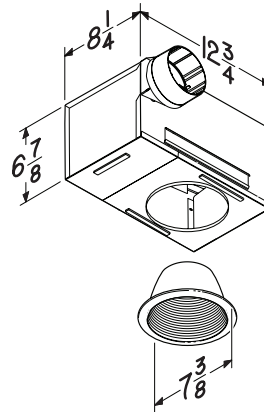


## AIR FLOW PERFORMANCE

### MODEL 744L - 50 CFM SETTING

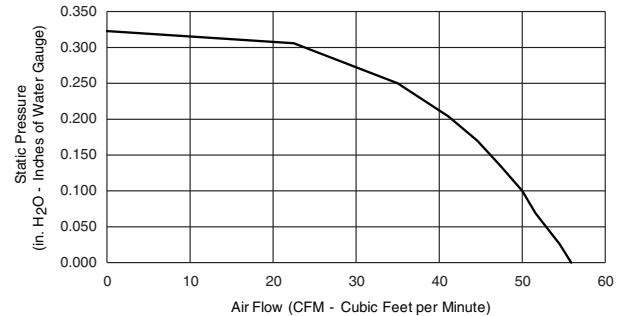

### MODEL 744L - 80 CFM SETTING

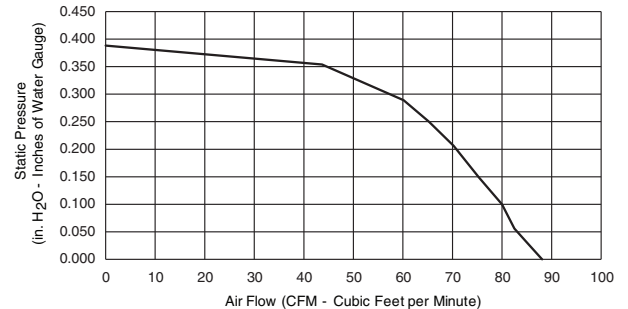

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

Broan-NuTone LLC Hartford, Wisconsin www.nutone.com 888-336-3948

| REFERENCE | QTY. | REMARKS | Project           |
|-----------|------|---------|-------------------|
|           |      |         | Location          |
|           |      |         | Architect         |
|           |      |         | Engineer          |
|           |      |         | Contractor        |
|           |      |         | Submitted by Date |