

TYPE UG

A fully-interlocked, non-UL flexible steel conduit designed for high strength in "tight-spot" installations.

Construction:

- Brite Tin Plated Steel
- Helically wound, Interlocking formed strip
- Note: Electrical trade sizes do not apply to Type UG

Application:

- The bright appearance of the finished product lends itself to installations where the conduit may be visible after the final assembly.
- Mates with a variety of setscrew and clamp type connectors



All Products Proudly Made in the USA

Product Information


CERTIFICATIONS & COMPLIANCE



WEEE and RoHS Compliant

ARRA: For ARRA Certification

Letter, please [click here](#)

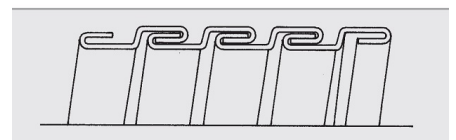

Interlock

Product Table

	Internal Diameter		Outer Diameter		Inside Bend Radius	Weight	Standard Length	
Type	Min (IN.)	Max (IN.)	Min (IN.)	Max (IN.)	Static (IN.)	Lbs. per 100 Ft	Coil (Ft.)	Part #
UG-380	0.443	0.473	0.563	0.593	2.5	16	50	91101
UG-120	0.755	0.785	0.875	0.905	3.0	22	50	92101
UG-340	0.943	0.973	1.063	1.093	3.5	26	50	93101
UG-100	1.208	1.238	1.328	1.358	4.5	34	50	94101
UG-125	1.485	1.515	1.578	1.608	5.5	50	50	95101
UG-150	1.735	1.765	1.843	1.873	6.5	56	50	96101
UG-200	2.235	2.265	2.390	2.420	8.5	80	50	97101
UG-250	2.735	2.765	2.937	2.967	10.5	85	50	98101
UG-300	3.360	3.390	3.438	3.468	13.0	105	50	99101

related products



TYPE USL

This extra-flexible steel conduit is recognized by UL and CSA for use within listed and certified assemblies.

[see product detail »](#)



TYPE SL

This non-UL, extra-flexible product, available in the smaller diameters, is designed for tight-spot installation and where continuous flexing is required of a steel wound hose.

[see product detail »](#)



Type VJC

Vacuum jacketed non-UL steel conduit for high-flex installations.

[see product detail »](#)



Type CL

CL is a nonmetallic UL Recognized nylon corrugated Mechanical Protection Tubing (MPT) designed for the support and routing of conductors and cables. It is used as a UL / CSA component within OEM equipment.

[see product detail »](#)