

RXM REEL STANDS

RAPID AND SECURE REEL SET UP



ELIMINATE LOOSE PIECES AND THE NEED FOR ADDITIONAL TOOLS DURING SETUP

SAFETY

- Open head design removes risk of spindle detachment as compared to other open head models.

ERGONOMIC

- Sidewind crank decreases muscle efforts to the wrist, hand and forearm.
- Easier to use when at max capacity.

FLEXIBILITY

- Interchangeable left and right usage.
- Compact design and weight allow for easy transport and less lower leg injury.




GREENLEE®
A Textron Company

FASTER, SAFER, EASIER®




Open Head: Allows for fast, top loading of spindle with forward extensions to secure during the pull



Quick Release Pin: Fold reel stand down for convenient transporting and compact storage

Base: Stability with large base footprint

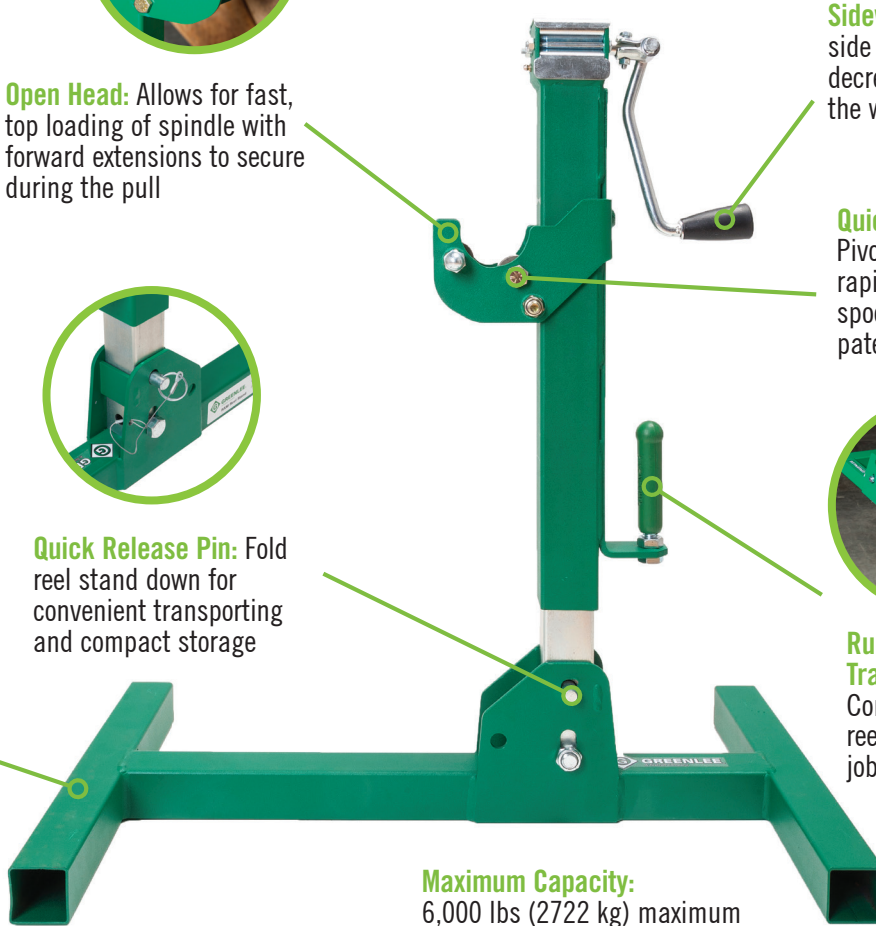

Sidewind Crank: Eliminates side to side wrist movement, decreasing muscle efforts to the wrist, hand and forearm.

Quick Adjust: Pivot and slide the head to rapidly adjust for different spool diameters with this patent pending feature



Rubber Carry Transport Handle: Comfortably move the reel stand around the job site

Maximum Capacity:
6,000 lbs (2722 kg) maximum
spool weight capacity per reel
stand pair

SPECIFICATIONS

Spool weight capacity (per pair): 62": 6,000 lbs (2722 kg)
Spool diameter capacity: 23 to 72" (582mm to 1,829mm)
Storage Dimensions: 37" x 17" x 11" (940mm x 432mm x 280mm)
Weight: 35 lbs (16kg)

ORDERING INFORMATION

CAT. NO.	UPC. NO.	DESCRIPTION
RXM	05711	REEL STAND (RXM)
647	15321	SPINDLE, REEL STAND (62") 6,000 lbs / 2722 kg
684	15375	SPINDLE, REEL STAND (76") 5,000 lbs / 2268 kg

Full Set Up Requires: 2x Reel Stands, 1x Spindle



***Use with Greenlee Ultra Cable Feeder or Cable Tray Feeder for a complete feeding solution**

