



G6 **TURBO**TM 6,000 lb Puller

**HANDS DOWN
FASTER. PERIOD.**





UP TO
60% FASTER
compared to the
COMPETITION*

Be more efficient and pull heavy loads up to 6,000 lbs at faster speeds reducing downtime.

WWW.GREENLEE.COM

*Results determined by external testing. Actual pull speeds may vary depending on pull conditions.

FASTER. SAFER. EASIER.®



GET FAST Labor Savings

Actual customer data on annual average pulls on the job site per year can save the customer:

**\$2,000/YEAR
SAVINGS vs Cannon® 6K***

**\$5,200/YEAR
SAVINGS vs Maxis® M6K-M***

*Results determined by average labor rates of \$50/hr of two electricians and assumes 100 pulls per year. Actual results may vary. Compared to iT00Lco™ Cannon® 6K and Southwire® Maxis® M6K-M. iT00Lco™ is a trademark of iT00Lco, LLC. Maxis® is a registered trademark of Southwire Company.

SPEED

- Setup in less than 60 seconds
- Whether you're pulling rope or cable, the G6 Turbo™ achieves the fastest pull time

POWER

- Strong, rugged design - unmatched quality
- Avoid time lost waiting for replacement parts
- Pull with confidence, truly capable at max 6,000 lb load

No loose pieces, allowing quick changeover for easy transport

Ergonomic design eliminates heavy lifting during setup

Dual capstans increase pulling speeds and maximize efficiency


Built-in dolly for fast and easy transport

No adapter needed - easily clamp conduit in seconds

Circuit breaker monitor for safe auto shutoff and extend motor life

Two speed motor specially designed for 6,000 lb loads

Force indicator prevents damage to puller

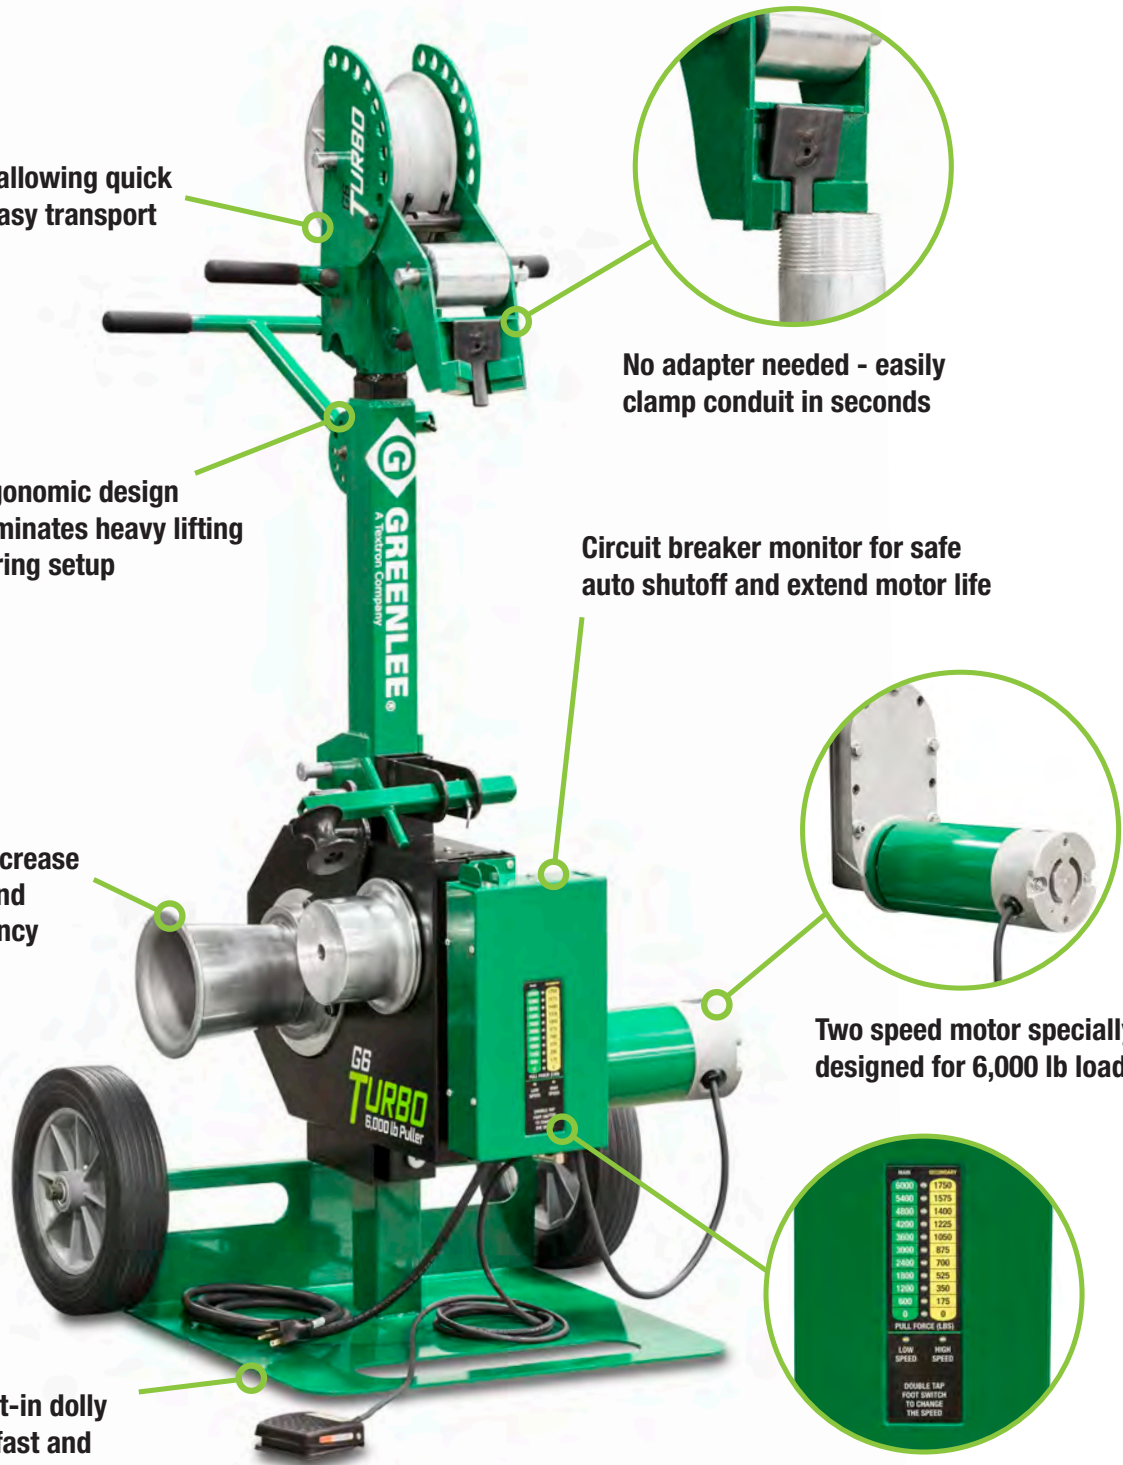

G6 TURBO™

6,000 lb Puller



**“The G6 Turbo™ filled the
gap for our pulling needs.”**

////////////////////
- NGC Construction Inc.

ORDERING INFORMATION

CAT. NO.	UPC NO.	DESCRIPTION
G6	06954	G6 Turbo™ 6,000 lb Puller

SPECIFICATIONS

PULLING FORCE: 4,000 lbs (17.800 kN) Continuous,
5,000 lbs (22.200 kN) Intermittent,
6,000 lbs (26.700 kN) Momentary

ROPE SIZE: 3/4" (19.100 mm) Double-Braided
Composite, Rated at 26,000 LB (115.600 kN)

DRIVE MOTOR: 120V VAC, 50/60 Hz, 12 Amps

**NO LOAD MAIN
CAPSTAN SPEED:** High Speed 28 ft/min (8.53 m/min),
Low Speed 11 ft/min (3.35 m/min)

**NO LOAD SECONDARY
CAPSTAN SPEED:** High Speed 90 ft/min (27.43 m/min),
Low Speed 35 ft/min (10.70 m/min)

**STANDARD BOOM
EXTENSION** 7.5' (2.29 m)

WEIGHT 252 lbs (114 kg)

INCLUDES A FORCE INDICATOR AND FOOT SWITCH

PULLING PRODUCTS

Check out other Greenlee pulling products



G-Series Smart Pull

A comprehensive line of jack stands, reel rollers, caddies and dispensers to efficiently handle cable payout.



Cable Feeder

Increase efficiency and productivity by using a cable feeding system to make cable setup and payout a one-person job.



RXM Reel Stands

An extensive line of sheaves including hook type, conveyor, tray-type and feeding to fit different cable pulling situations.



Grips & Crimpers

Save time by using Gator Grips. Select the size for an indent crimper, and be set up for the pull in less than two minutes.



Rope

Use up to 3/4" rope with a maximum rated capacity that meets or exceeds the cable pullers maximum pulling force.



Pulling Accessories

An extensive line of sheaves including hook type, conveyor, tray-type and feeding to fit different cable pulling situations.



www.greenlee.com MA6641 04/17

4455 Boeing Dr • Rockford, IL 61114 • USA • 800-642-2155

©2017 Greenlee Textron Inc. • An ISO 9001 Company • Printed in USA

Greenlee Textron Inc. is a subsidiary of Textron Inc.