



SW2015



Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
01.1	Design Release		SEE ECN# 013740	CAS	2/21/2018	KAC	2/21/2018

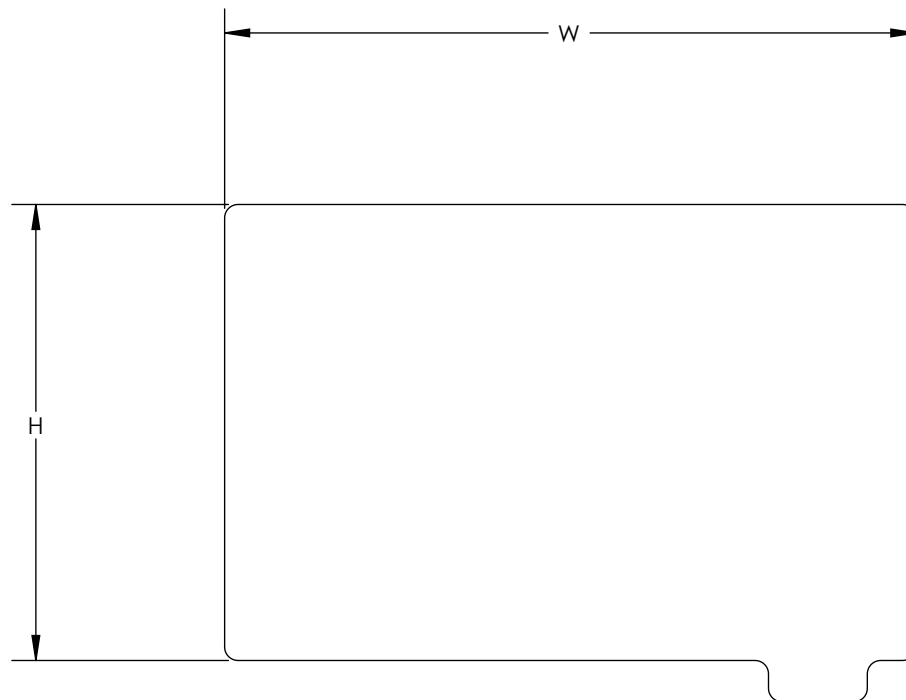

NOTES:

1. TEMPERATURE RANGE: -20°F TO +302°F (-29°C TO +150°C)
2. ADHESIVE: ACRYLIC, 1.0 MIL AGGRESSIVE REMOVABLE
3. ADHESIVE OPERATING TEMPERATURE: +50°F (FROM +10°C)
4. HALOGENFREE
5. RoHS

01.1

GLOBAL PART NAME	PART NUMBER	TYPE	WIDTH	HEIGHT	COLOR	PACKAGE QUANTITY
PAINTSHIELD1-240-CL	596-00792	PAINTSHIELD1	3.6	2.375	CLEAR	10
PAINTSHIELD2-240-CL	596-00793	PAINTSHIELD2	3.5	1.75		
PAINTSHIELD3-240-CL	596-00794	PAINTSHIELD3	4.0	1.80		
PAINTSHIELD4-240-CL	596-00795	PAINTSHIELD4	5.375	1.625		
PAINTSHIELD5-240-CL	596-00796	PAINTSHIELD5	3.6	0.9		
PAINTSHIELD6-240-CL	596-00797	PAINTSHIELD6	3.9	0.7		

Material PET	Units: inches	The copyright of this drawing is reserved by Hellermann Tyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of Hellermann Tyton.	Drawn	GRW	3/2/2017	Article/Type-No	PAINTSHIELD_	Scale	
	Dimension without tolerances details to: .XXXX = ±.0005 .XXX = ±.005 .XX = ±.01 .X = ±.03 None = ±.06 ∠ = ±0.5° Dimension Formatted in/[mm]		Approved	KAC	3/2/2017	Title	PEEL-OFF PAINT SHIELD, UV STABLE	Project Number PRP 17-0712	
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	AH
						17-0712-001-CSU		Sheet	1/1