



SS22WSTP

ELECTROMAGNETIC CIRCLINE BALLAST



DESCRIPTION

1 x 22W Circline | 120V Input Voltage | Normal Power Factor | Preheat Start

STARTING METHOD: Preheat

INPUT VOLTAGE: 120VAC +5% -10%

INPUT FREQUENCY: 60 Hz

BALLAST FACTOR (LIGHT OUTPUT): Normal

WARRANTY: 3 Years




PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 32°F, 0°C
- Maximum Case Temperature: 194°F, 90°C
- UL, cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermal Protection

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
FC6T9	1	120V	20W	0.35A	0.46	1.68	0.79	3.95	20%
FC8T9	1	120V	19W	0.27A	0.59	1.58	0.79	4.16	15%

WIRING DIAGRAM

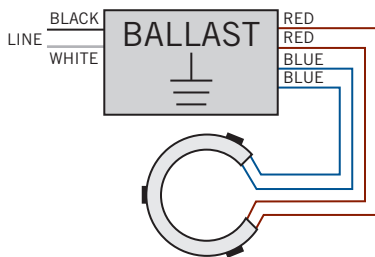

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

	LENGTH	3.10"
	WIDTH	1.89"
	HEIGHT	1.42"
	MOUNTING	2.75"
	CASE STYLE	C7

STANDARD LEAD LENGTHS*

WHITE	12"
BLACK	12"
BLUE	9"
RED	9"
YELLOW	9"

*Consult Keystone for special lead length requirements.



SS22WSTP

ELECTROMAGNETIC CIRCLINE BALLAST

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
SS22WSTP-CP	Carton Pack	48	Active

CATALOG NUMBER BREAKDOWN

SS22WSTP-CP

Self Start Wattage With Socket Thermally Protected Packaging Style