

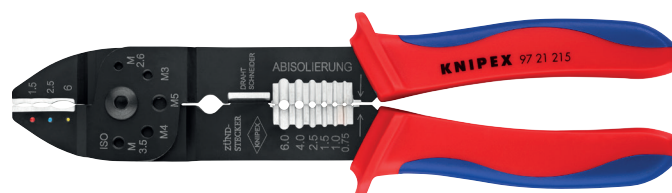



- > for cutting cables, stripping wire and crimping insulated and non-insulated terminals, connectors and plug-type connectors
- > with threaded holes for cutting copper and brass screws threaded 7/64", 1/8", 9/64", 5/32" and 13/64" (M2.6, M3, M3.5, M4 and M5)
- > bolted joint for higher stability and smooth movement
- > special steel; high-strength



97 21 215



Product Number	Packaging	↔ Inch mm			Pliers	Handles	Applications	Capacity mm ²	Number of crimping positions	⚖ lbs
97 21 215		9 1/4 235			black lacquered	multi-component grips	Insulated terminals + cable connectors	0.75 - 6.0	3	0.63
97 21 215 B		9 230			black lacquered	multi-component grips	Non-insulated open plug-type connectors (plug width 6.3 mm)	0.5 - 2.5	3	0.63
97 21 215 C		9 230			black lacquered	multi-component grips	Non-insulated terminals + cable connectors	0.5 - 6.0	3	0.63
97 21 215 SB	X	9 1/4 235			black lacquered	multi-component grips	Insulated terminals + cable connectors	0.75 - 6.0	3	0.63
97 22 240		9 1/2 240			black lacquered	multi-component grips	Insulated terminals + cable connectors	0.75 - 6.0	3	0.67
							Non-insulated open plug-type connectors (plug width 6.3 mm)	0.5 - 2.5		