

CHIP | FLUSH MOUNT

57690 | 57692 | 57694 | 57695 | 57697 | 57699


- Size options: 5," 6.5," 7," and 9"
- Available in 3000k (Made-to-order Color Temperatures available)
- Suitable for Closets according to NEC Section 410.8 & 410.16
- Available in Black (BK), Satin Nickel (SN) and White (WT)
- Dimmable with Triac and ELV Dimmers
- Easy to install: fits in 3-0 and 4-0 Outlet Box (pancake and mud ring acceptable)
- Pendant light accessory available (sold separately)
- Edge-Lit LED Technology
- Suitable for Wet Location, for use on ceilings outdoor and above showers
- cETLus

Job Name : _____


Job Type : _____

Quantity : _____

Comments : _____

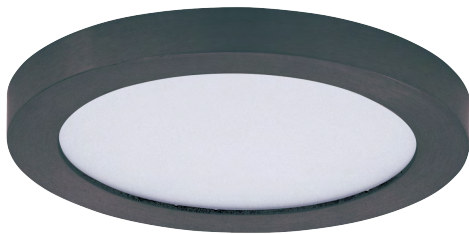



Round

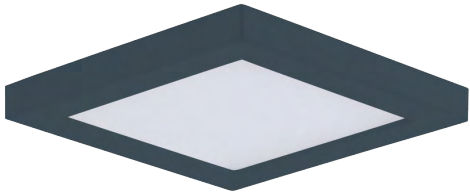

Square

PRODUCT DESCRIPTION

This low profile flush mount is our entry level Wafer. Manufactured of a plastic shell with aluminum backing, the Chip brings all the look of the Wafer at economical pricing for residential applications. The bright and even lighting effect is delivered by edge-lit technology offering an upscale surface mount solution to substitute recessed can lighting.



MEASUREMENTS

MODEL DIMENSION

57690	5.25"W x 0.5"H x 5.25"L
57692	7"W x 1.25"H x 7"L
57694	9" W x 1.25" H x 9"L
57695	5"W x 0.5"H x 5"L
57697	6.4"W x 0.5"H x 6.4"L
57699	8.5" W x 0.75" H x 8.5"L

WIRE
LENGHT

8"L
8"L
6"L
8"L
8"L
8"L

LAMPING

MODEL	BULB TYPE	CRI	COL TEMP.	LUMENS RATED	DEL	DIMMABLE	INPUT
57690	12W PCB Integrated LED	90+	3000K	880	780	Triac CL/ELV	120V
57692	16W PCB Integrated LED	90+	3000K	1230	950	Triac/ELV	120V
57694	18W PCB Integrated LED	90+	3000K	1550	1200	Triac/ELV	120V
57695	12W PCB Integrated LED	90+	3000K	880	780	Triac CL/ELV	120V
57697	15W PCB Integrated LED	90+	3000K	1080	980	Triac CL/ELV	120V
57699	18W PCB Integrated LED	90+	3000K	1620	1260	Triac CL/ELV	120V

FINISHES OPTIONS:

Satin Nickel (SN)

White (WT)

Black (BK)



MATERIAL:

Polycarbonate + Steel

GLASS:

White

AVAILABLE SIZE:

5" | 6.5" | 7" | 9"

RATINGS:

cETLus
Wet Location
Title 24 JA8 Compliant
Energy Star
ADA



ADDITIONAL:

INSTALL UP/DOWN: UP
RATED LIFE: 50,000 hours
OPERATING TEMPERATURE:
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com