




4675 West 160th St
Cleveland, OH 44135
PH: 1.800.321.9532
FX: 1.800.321.9535

ENGINEERING SUBMITTAL

GALVANIZED BASE SELF-SEAL[®] ROOF FLASHINGS

Job Reference

Engineering Specification: Arfco Galvanized Base Self-Seal Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required.

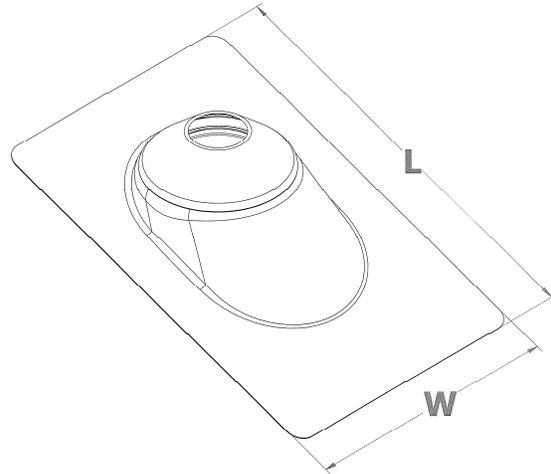

(All dimensions in inches)

- ◆ Roof Flashing slides over DWV pipe for pitch to 40°
- ◆ Made of rust-proof, stamped 24 gauge galvanized steel
- ◆ Non-fading sealing collar
- ◆ Approved for Type B installations
- ◆ Not for hot-mopped or built-up roofs
- ◆ Do not use petroleum based products on rubber collars
- ◆ All Roof Flashings are shipped 12 per carton

✓	Product No.	Description	Length (L)	Width (W)
	12201	1-1/4" – 1-1/2" Galvanized Self-Seal Roof Flashing	12-1/2"	9"
	12202	2" Galvanized Self-Seal Roof Flashing	12-1/2"	9"
	12203	3" Galvanized Self-Seal Roof Flashing	14-1/2"	11"
	12204	4" Galvanized Self-Seal Roof Flashing	15"	12"
	11921	1-1/4" – 1-1/2" Galvanized No-Calk Roof Flashing	18"	18"
	11934	2" Galvanized No-Calk Roof Flashing	18"	18"
	11947	3" Galvanized No-Calk Roof Flashing	18"	18"
	11950	4" Galvanized No-Calk Roof Flashing	18"	18"
	13301	1/2", 3/4", 1" Galvanized Self-Seal Roof Flashing – Solar	12-1/2"	9"
	11830	1/2" – 1" Galvanized No-Calk Roof Flashing – Solar	11"	14-1/2"
	11831	1/2" – 1" Galvanized No-Calk Roof Flashing – Solar	18"	18"



IAPMO Listed

Data is subject to manufacturing tolerances.