



4700 W. 160th St.
Cleveland, Ohio 44135
Ph: (800) 321-9532
Fax: (800) 321-9535
www.oatey.com



74000 Series PVC Adjustable Commercial Cleanout PVC Barrel With 6" Round Cover With Round Ring



SUBMITTAL SPECIFICATION

Engineering Specification: Oatey commercial grade cleanouts are used for general service in restaurants, restrooms and other commercial applications where traffic is expected. Barrel assembly is completely adjustable to meet the finished floor height.

Job Reference

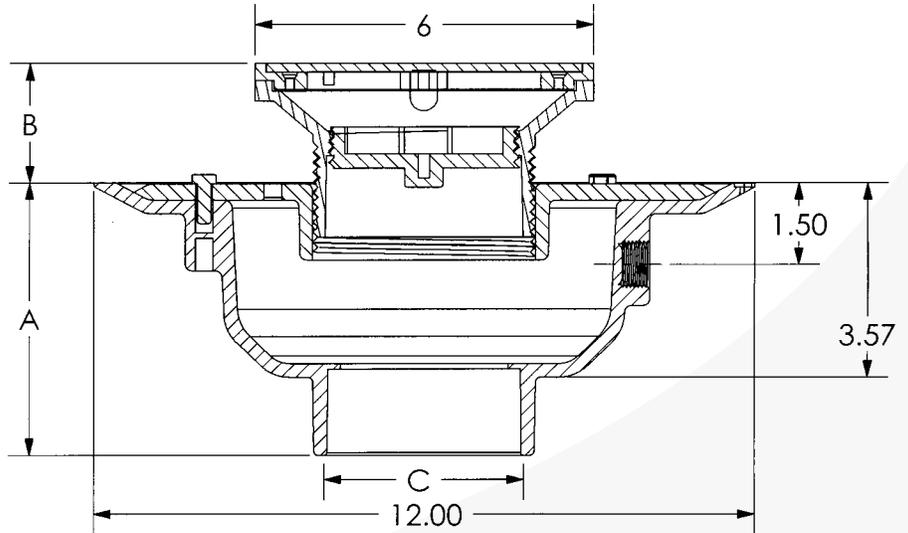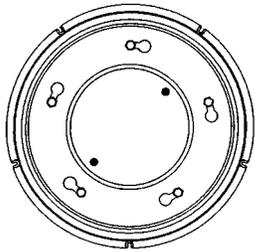

(All dimensions in inches)

- Barrel diameter is 3-1/2 in. IPS thread.
- Primer tap knock-out is 1/2 in. FIP thread.

✓	Socket Size (C)	Base Material	Cover Finish	Part Number
	2 in.	PVC	Brass	74132
	2 in.	PVC	Nickel	74162
	2 in.	PVC	Chrome	74192
	3 in.	PVC	Brass	74133
	3 in.	PVC	Nickel	74163
	3 in.	PVC	Chrome	74193
	4 in.	PVC	Brass	74134
	4 in.	PVC	Nickel	74164
	4 in.	PVC	Chrome	74194
	6 in.	PVC	Brass	74136
	6 in.	PVC	Nickel	74166
	6 in.	PVC	Chrome	74196

	Dimensional Data		
	A	B	C
2 in.*	5.25 in.	1.00 – 3.75 in.	2 in. Hub
3 in.	5.00 in.	1.00 – 3.75 in.	3 in. Hub
4 in.	5.25 in.	1.00 – 3.75 in.	4 in. Hub
6 in.	6.00 in.	1.00 – 3.75 in.	6 in. Hub

*2 in. base includes 3 in. x 2 in. bushing.

**3 in. plug included in barrel.

Cover Properties	
Finish	Load*
Brass	Medium
Nickel	Medium
Chrome	Medium

*Load is defined by ASME A112.21.1M.

Light Duty – Safe live load under 2000 lbs.

Medium Duty – Safe live load between 2000 lbs. and 4999 lbs.



4700 W. 160th St.
Cleveland, Ohio 44135
Ph: (800) 321-9532
Fax: (800) 321-9535
www.oatey.com



84000 Series ABS Adjustable Commercial Cleanout PVC Barrel With 6" Round Cover With Round Ring



SUBMITTAL SPECIFICATION

Engineering Specification: Oatey commercial grade cleanouts are used for general service in restaurants, restrooms and other commercial applications where traffic is expected. Barrel assembly is completely adjustable to meet the finished floor height.

Job Reference

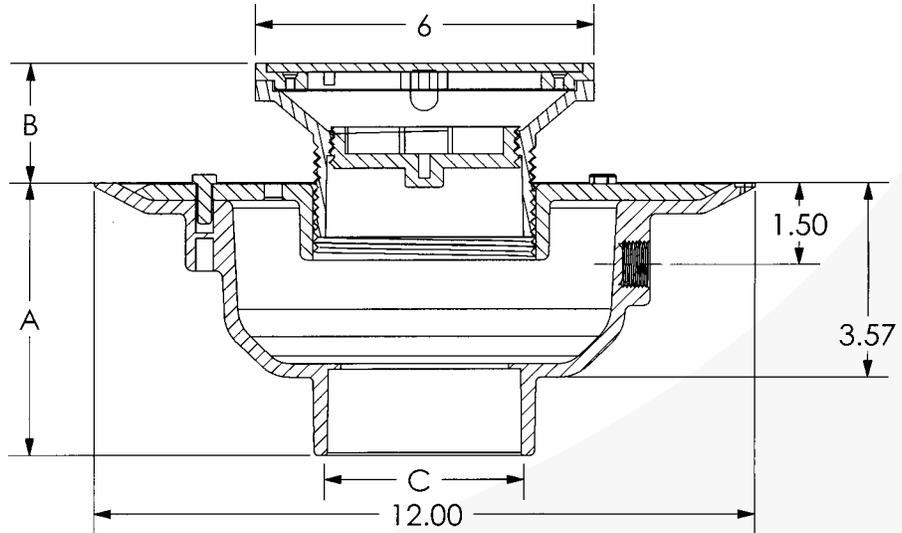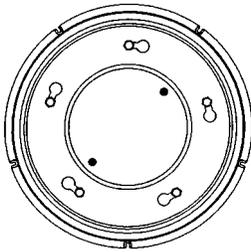

(All dimensions in inches)

- Barrel diameter is 3-1/2 in. IPS thread.
- Primer tap knock-out is 1/2 in. FIP thread.

✓	Socket Size (C)	Base Material	Cover Finish	Part Number
	2 in.	ABS	Brass	84132
	2 in.	ABS	Nickel	84162
	2 in.	ABS	Chrome	84192
	3 in.	ABS	Brass	84133
	3 in.	ABS	Nickel	84163
	3 in.	ABS	Chrome	84193
	4 in.	ABS	Brass	84134
	4 in.	ABS	Nickel	84164
	4 in.	ABS	Chrome	84194
	6 in.	ABS	Brass	84136
	6 in.	ABS	Nickel	84166
	6 in.	ABS	Chrome	84196

	Dimensional Data		
	A	B	C
2 in.*	5.25 in.	1.00 – 3.75 in.	2 in. Hub
3 in.	5.00 in.	1.00 – 3.75 in.	3 in. Hub
4 in.	5.25 in.	1.00 – 3.75 in.	4 in. Hub
6 in.	6.00 in.	1.00 – 3.75 in.	6 in. Hub

*2 in. base includes 3 in. x 2 in. bushing.

**3 in. plug included in barrel.

Cover Properties	
Finish	Load*
Brass	Medium
Nickel	Medium
Chrome	Medium

*Load is defined by ASME A112.21.1M.

Light Duty – Safe live load under 2000 lbs.

Medium Duty – Safe live load between 2000 lbs. and 4999 lbs.