



4700 W. 160th St.
Cleveland, OH 44135
PH:800-321-9532
FX:800-321-9535
www.oatey.com


TECHNICAL SPECIFICATION

**SIDEFLASH™
VERTICAL FLASHINGS**



Engineering Specification: Oatey SideFlash Vertical Flashings can be used in commercial and residential applications where a watertight seal of piping penetrations through outside walls is required. SideFlash Vertical Flashings are designed with a tear out collar to accommodate pipe size use from 1/2" to 2-1/2" or 3" to 6". SideFlash Vertical Flashings are rated to 180°F.

Job Reference

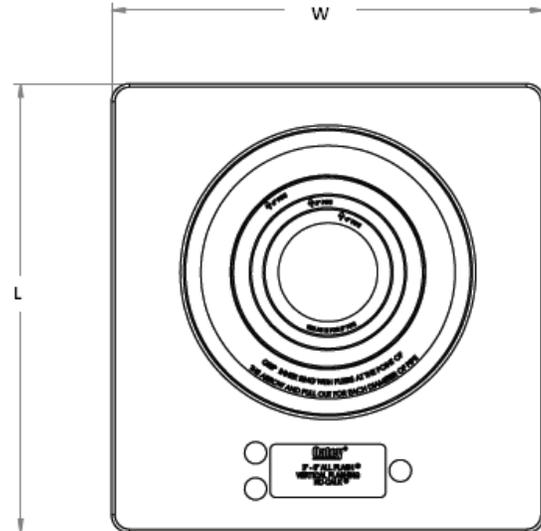

(All dimensions in inches)

- ◆ Made of hard plastic base with elastomeric collar
- ◆ Not for use on sloped surfaces
- ◆ Do not use paint or petroleum based products on rubber collars
- ◆ Longer lasting than caulk or foam
- ◆ Seals against air penetration to reduce energy costs
- ◆ Prevents bugs and vermin from entering the structure through opening

✓	Product No.	Description	Length (L)	Width (W)	PACK	Ctn. Weight (lbs.)
	12805	1/2" – 2-1/2" Vertical Flashing	8-1/2	8	12	3
	12806	3" – 6" Vertical Flashing	12-1/2	12	12	6

Data is subject to manufacturing tolerances.