

EZ Tower Light



EZ Tower Light

Model: PFXZCETWHA1, PFXZCETWW1

USB
Connect

Powered by

Screen Editor
GP-Pro EX

Features:

- Easy deployment, configure functions via a software template eliminates the need to program tower light functions in ladder logic.
- Make your status system easier to understand by leveraging the multi-color LEDs which allows the flexibility to control 4 colors and 2 flash rates per unit
- A single product for a wide range of customers
- USB installation simplifies wiring


Specifications

Model	PFXZCETWHA1	PFXZCETWW1
Description	EZ Tower Light tube mounting with fixing plate	EZ Tower Light with base mounting
Supported Software	GP-Pro EX Ver. 3.6 or later	
Supported HMI Models	SP5000, GP4000 Series, GP4000M Modular HMI Series*, LT4000M, Except GP4100	
* When you connect with GP4000M Series, please connect via self power USB Hub.		

General Specifications

Model	PFXZCETWHA1	PFXZCETWW1
Description	EZ Tower Light tube mounting with fixing plate	EZ Tower Light with base mounting
Certifications	UL 508, cUL, CSA22.2, CE	
Color	Red / Green / Blue / Yellow	
Light Mode	Off / On / Blink (High) / Blink (Low)	
Buzzer	4 sounds	
Buzzer Volume	High / Middle / Low	
Buzzer Tone	High / Low	
Buzzer	85dB	82dB
Interface	USB 2.0 (Mini B)	
Supply Voltage	DC 5V (Powered from USB bus)	
Power Consumption	2W	
Surrounding Air Operating Temperature	0 to 55 ° (32 to 131 °)	
Operating Humidity	35 to 85%RH (no condensation)	
Operating Atmosphere	No Corrosive Gas	
Storage Temp.	-35 to 70 ℃ (-95 to 158 ℉)	
Protection	IP54	
Weight	0.3kg (0.66lb)	

Dimension Drawing

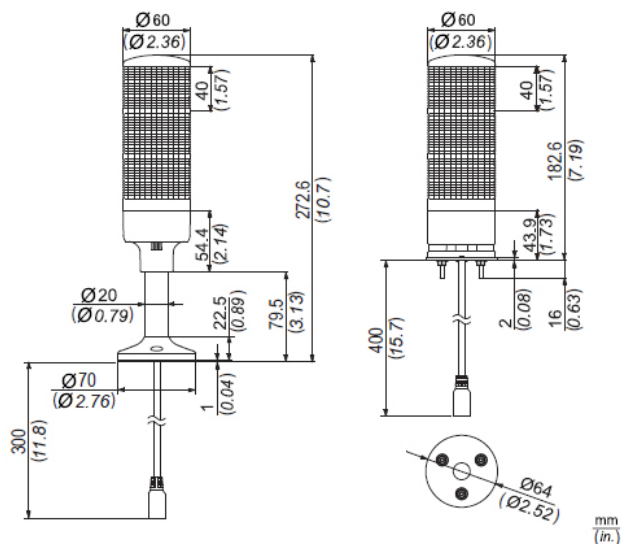

Ordering Information

Part Number	Description
PFXZCETWW1	EZ Tower Light with base mounting
PFXZCETWHA1	EZ Tower Light tube mounting with fixing plate

Options


Part Number	Description
ZC9USCBMB1	Cable for connecting from an EZ Tower Light to a Pro-face's interface unit.
XVGUZ02*	Cable lock to prevent disconnection of USB cable

*One piece is included with the EZ Tower Light unit.

Easily Connect to Pro-face HMIs

For Operation

Project Transfer

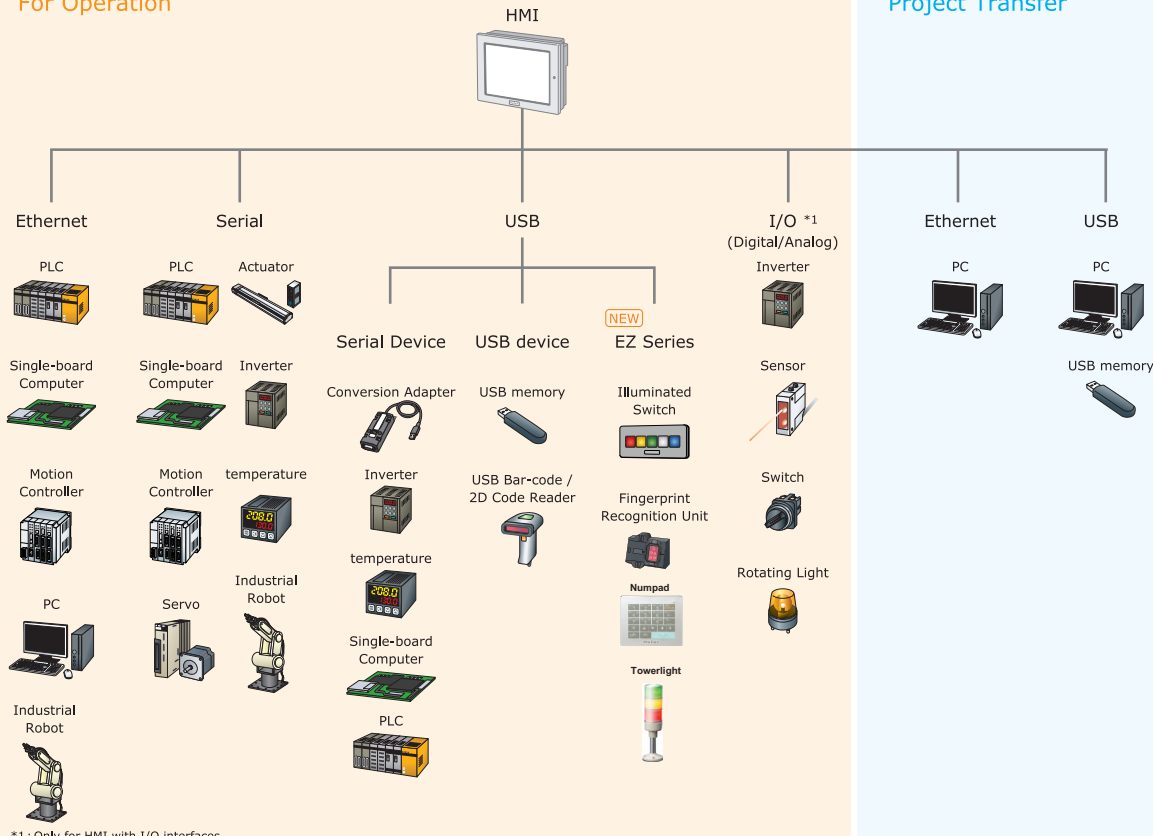

*1: Only for HMI with I/O interfaces.

Pro-face America
 Phone: 734.477.0600
 Fax: 734.864.7347
www.profaceamerica.com

Customer Service Hotline: 800.289.9266

For more information

ACCESS

www.profaceamerica.com

Pro-face



California Proposition 65 Warning—Lead and Lead Compounds

Advertencia de la Proposición 65 de California—Plomo y compuestos de plomo

Avertissement concernant la Proposition 65 de Californie—Plomb et composés de plomb

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

⚠ ADVERTENCIA: Este producto puede exponerle a químicos incluyendo plomo y compuestos de plomo, que es (son) conocido(s) por el Estado de California como causante(s) de cáncer y defectos de nacimiento u otros daños reproductivos. Para mayor información, visite : www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Ce produit peut vous exposer à des agents chimiques, y compris plomb et composés de plomb, identifiés par l'État de Californie comme pouvant causer le cancer et des malformations congénitales ou autres troubles de l'appareil reproducteur. Pour de plus amples informations, prière de consulter: www.P65Warnings.ca.gov.

All trademarks are the property of Schneider Electric SE, its subsidiaries, and affiliated companies.

Schneider Electric USA, Inc.
800 Federal Street
Andover, MA 01810 USA
888-778-2733
www.schneider-electric.us

Todas las marcas comerciales son propiedad de Schneider Electric SE, sus filiales y compañías afiliadas.

Importado en México por:
Schneider Electric México, S.A. de C.V.
Av. Ejercito Nacional No. 904
Col. Palmas, Polanco 11560 México, D.F.
55-5804-5000
www.schneider-electric.com.mx

Toutes les marques commerciales sont la propriété de Schneider Electric SE, ses filiales et compagnies affiliées.

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, ON L5R 1B8 Canada
800-565-6699
www.schneider-electric.ca