




SPECIFICATION SHEET

56-630



MAXICHEM® NITRILE BLEND COATED GLOVE WITH NYLON / LYCRA® LINER AND NON-SLIP GRIP - 12"

- Chemical resistance delivered through the ATG® LiquiTech® technology platform
- Ultra lightweight synthetic coating combined with an industry leading super light seamless knit liner
- Tailored cuff, keeping the cuff close to your hand so maintaining your fingers at the tip of the glove
- Micro-cup non-slip grip finish allows for a controlled and superior grip in oily and wet applications
- This glove has been laundered prior to final packaging
- All ingredients used in the manufacturing and construction of this product are compliant with the REACH legislation

APPLICATIONS

- Automotive assembly
- Chemical handling
- Oil and gas
- General maintenance
- Metal fabrication

CARE INSTRUCTIONS

Use commercial laundry soap or detergent (do NOT use dry cleaning solutions) Wash in warm to medium hot water, do not exceed 104°F (40° C). Wash for 10 minutes and rinse in cold water. Repeat wash and rinse if soiling is especially heavy. Tumble dry - maximum temperature 140°F (60° C)

TECHNICAL DATA

MATERIAL	Nitrile, nylon, Lycra®				
COLOR	Shell: ■ Green / Grip: ■ Black				
CUFF STYLE	Gauntlet cuff				
SIZES	S - XXL				
PACKAGING	12 pairs per dozen, 6 dozen per case				
CASE	20.0" x 11.8" x 10.8" / 50.8cm x 30.0cm x 27.4cm				
CASE WEIGHT	S	M	L	XL	XXL
	20.9 lbs 9.5 kg	22.5 lbs 10.2 kg	23.3 lbs 10.6 kg	24.3 lbs 11.0 kg	25.4 lbs 11.5kg
COO	Sri Lanka				

PERFORMANCE PROPERTIES

EN388: 4121						
ABRASION	0	1	2	3	4	-
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	-
PUNCTURE	0	1	2	3	4	-

BARCODES


ITEM	BAG	DOZEN	CASE
56-630/XXL	---	01616314079725	02616314079724
56-630/XL	---	01616314079718	02616314079717
56-630/L	---	01616314079701	02616314079700
56-630/M	---	01616314079695	02616314079694
56-630/S	---	01616314079688	02616314079687



DIMENSIONS (in/cm)

	S	M	L	XL	XXL
A	12.0 / 30.5	12.0 / 30.5	12.0 / 30.5	12.0 / 30.5	12.0 / 30.5
B	4.1 / 10.4	4.3 / 10.8	4.4 / 11.2	4.6 / 11.6	4.7 / 12.0

Thickness: 1.3mm

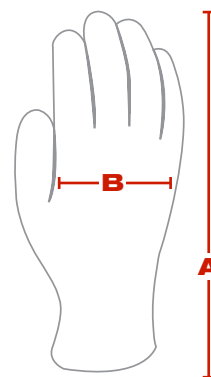

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.