

LED Wallpack Retrofits

60WP/LED/850/LS EX39 G3 BB 3/1

Philips LED HID replacement lamps are perfect LED replacement for a variety of outdoor applications. High intensity illumination, which means you get added visibility for applications like streets, public areas, and much more for a fraction of the energy used by conventional HID.

Product data


General information			
Cap-Base	EX39 [Exclusionary Mogul Screw]	Lamp Current (Nom)	666 mA
EU RoHS compliant	Yes	Wattage Equivalent	250(175-250) W
Nominal Lifetime (Nom)	50000 h	Starting Time (Nom)	1 s
Switching Cycle	50000	Warm Up Time to 60% Light (Nom)	1 s
Tier	CorePro	UL Type	Type B - bypass the ballast
Light technical			
Color Code	850 [CCT of 5000K]	Power Factor (Nom)	0.9
Luminous Flux (Nom)	9000 lm	Voltage (Nom)	100-277 V
Color Designation	Daylight	Temperature	
Correlated Color Temperature (Nom)	5000 K	T-Ambient (Max)	45 °C
Luminous Efficacy (rated) (Nom)	150.00 lm/W	T-Ambient (Min)	-20 °C
Color Consistency	ANSI 5000K quadrangle	T-Case Maximum (Nom)	65 °C
Color Rendering Index (Nom)	80	Controls and dimming	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Dimmable	Preset Dimming
Operating and electrical		Mechanical and housing	
Input Frequency	50 to 60 Hz	Bulb Finish	Clear
Power (Nom)	60 W	Bulb Material	Plastic

LED Wallpack Retrofits

Bulb Shape	Wall Pack
Product data	
Order product name	60WP/LED/850/LS EX39 G3 BB 3/1
EAN/UPC - Product	046677564292
Order code	929003000404

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	3
Material Nr. (12NC)	929003000404
Net Weight (Piece)	0.936 kg



Dimensional drawing



60WP/LED/850/LS EX39 G3 BB 3/1


Product	D	C
60WP/LED/850/LS EX39 G3 BB 3/1	92 mm	270 mm

Photometric data

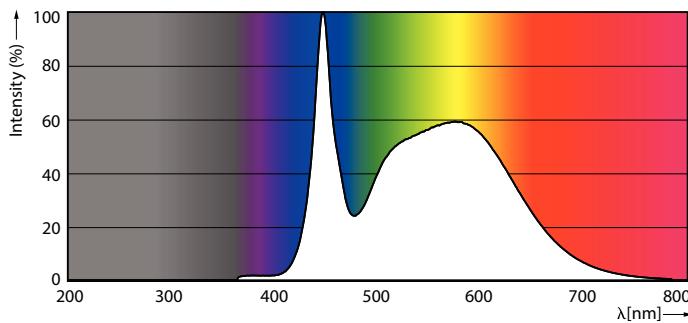

LEDTForce LS EX39 60W WallPack EX39 850-POC



LEDTForce LS EX39 40W WallPack EX39-LDD



LEDTForce LS EX39 60W WallPack EX39 850-GUL

LED Wallpack Retrofits

Lifetime

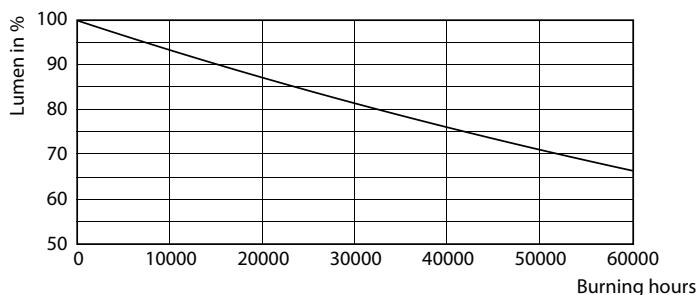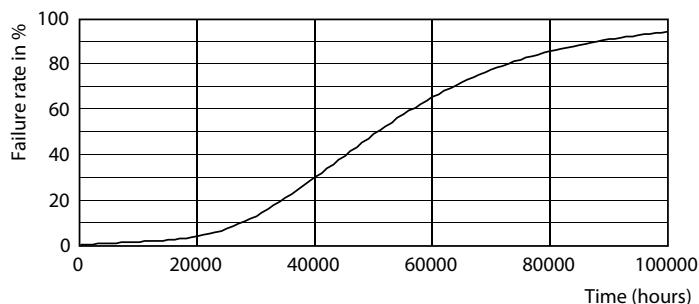

Life Expectancy Diagram

Lumen Maintenance Diagram

