



T8

14.5T8/COR/48-5CCT/MF18/G/DIM 25/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.


Product data

General information		Power (Nom) 14.5 W	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Lamp Current (Max)	125 mA
EU RoHS compliant	Yes	Lamp Current (Min)	58 mA
Nominal Lifetime (Nom)	50000 h	Starting Time (Nom)	0.5 s
Switching Cycle	50000X	Warm Up Time to 60% Light (Nom)	0.5 s
Tier	CorePro	UL Type	TLED_Type B; UL classified double end
Light technical		Power Factor (Nom)	0.9
Color Code	3000K/3500K/4000K/5000K/6500K	Voltage (Nom)	120-277 V
Beam Angle (Nom)	240 °	Temperature	
Luminous Flux (Nom)	1800 lm	T-Ambient (Max)	45 °C
Color Designation	3000K/3500K/4000K/5000K/6500K	T-Ambient (Min)	-20 °C
Correlated Color Temperature (Nom)	3000 3500 4000 5000 6500 K	T-Storage (Max)	65 °C
Luminous Efficacy (rated) (Nom)	124.00 lm/W	T-Storage (Min)	-40 °C
Color Consistency	6SCDM	T-Case Maximum (Nom)	70 °C
Color Rendering Index (Nom)	80	Controls and dimming	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Dimmable	Only with specific dimmers
Operating and electrical			
Input Frequency	50 to 60 Hz		

Mechanical and housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1200 mm
Bulb Shape	Tube, double-ended
Approval and application	
Energy Saving Product	Yes
Approval Marks	RoHS compliance UL certificate DLC compliance

Product data	
Order product name	14.5T8/COR/48-5CCT/MF18/G/DIM 25/1
EAN/UPC - Product	046677579678
Order code	929003540104
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	929003540104
Net Weight (Piece)	0.200 kg


Dimensional drawing

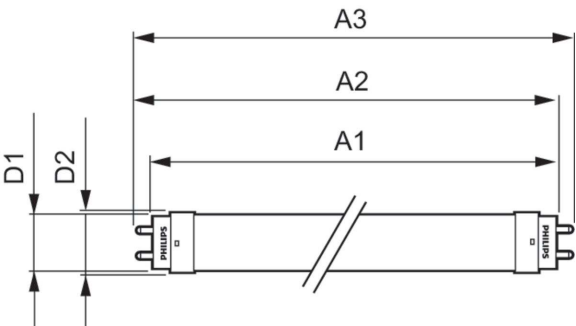


14.5T8/COR/48-5CCT/MF18/G/DIM 25/1

Product	D1	D2	A1	A2	A3
14.5T8/COR/48-5CCT/MF18/G/DIM 25/1	25.7 mm	28 mm	1198.2 mm	1205.3 mm	1212.4 mm

Photometric data

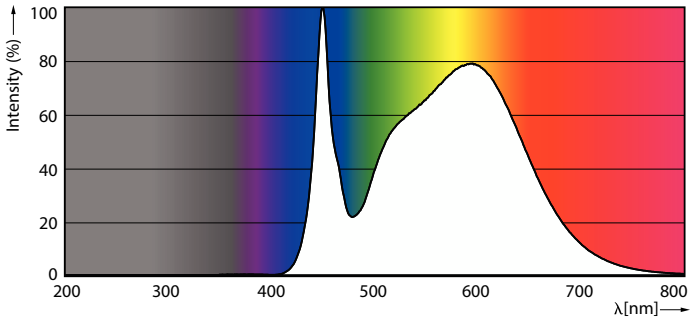


Spectral Power Distribution Colour




General uniform lighting

Photometric data




Light Distribution Diagram


Lifetime

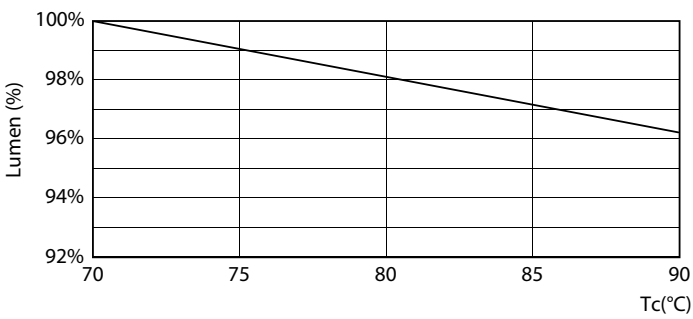


LumenVsTc

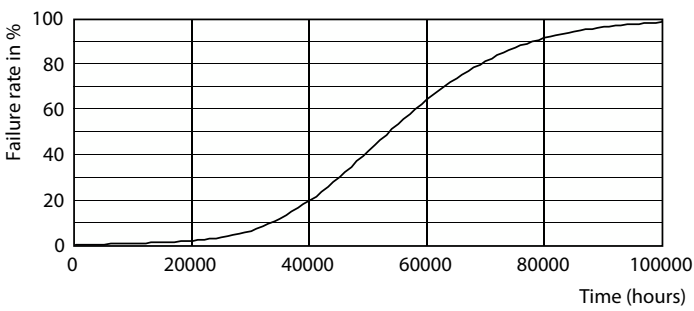

Life Expectancy Diagram

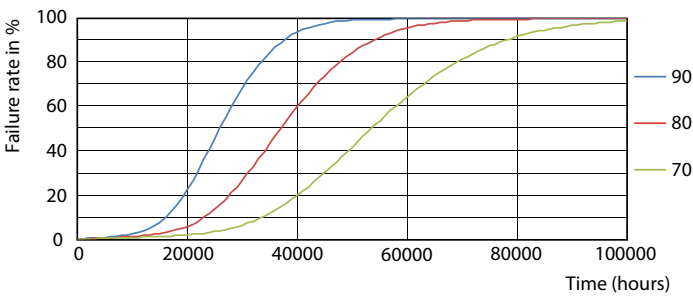


FailureRate

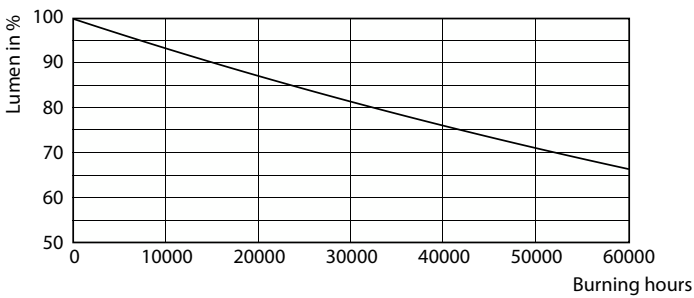

Lumen Maintenance Diagram

Lifetime

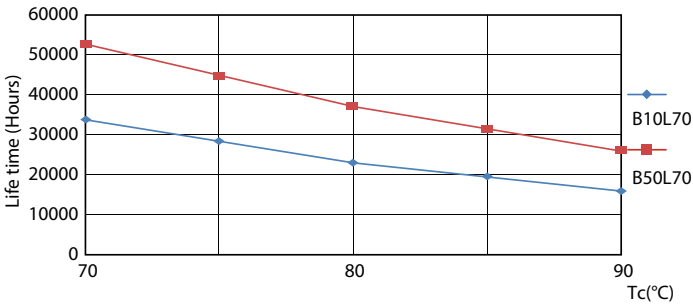

LifetimeVsTc

