



# **LED PAR38**

# 17PAR38/EXPERTCOLOR/F25/940/DIM

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

### **Product data**

General information	
Base	E26 [ Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	40000 h
Switching Cycle	50000
Tier	MasterClass
Light technical	
Color Code	940 [ CCT of 4000K]
Beam Angle (Nom)	25 °
Initial lumen (Nom)	1300 lm
Luminous Intensity (Nom)	6500 cd
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	73.53 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	95
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	17 W
Lamp Current (Nom)	170 mA
Wattage Equivalent	120 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	194 °F
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Bulb Finish	Clear
Bulb Material	Plastic
Bulb Shape	PAR38 [ PAR 4.75 inch/121mm]
Approval and application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	- kWh
Energy Certifications	Energy Star
Product data	
Order product name	17PAR38/EXPERTCOLOR/F25/940/DIM
EAN/UPC - Product	046677470876


Datasheet, 2022, December 8 data subject to change

## **LED PAR38**

Order code	470872
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001340004

Net Weight (Piece)	0.937 lb


### Dimensional drawing




17PAR38/EXPERTCOLOR/F25/940/DIM


# Product D C 17PAR38/EXPERTCOLOR/F25/940/DIM 3-3/4 in 3-11/16 in

#### Photometric data

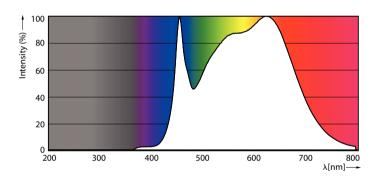



PAR38 17-120W 1250lm 25D 4000K E26 D





PAR38 17W 1300lm 25D 4000K E26

### PAR38 17-120W 1250lm 25D 4000K E26 D

### **LED PAR38**

#### Lifetime

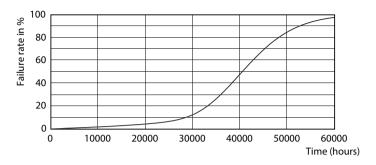



ExpertColor PAR38 30S 30L Dim 120V Life Expectancy Diagram

ExpertColor PAR38 30S 30L Dim 120V Lumen Maintenance Diagram

