

APC NetShelter Rack PDU Advanced, Switched, 3Phase, 43.5kW 400V 63A or 34.6kW 415V 60A, 42 Outlets, IEC309

APDU10450SW

① To be discontinued

! To be discontinued on: Sep 3, 2025

Overview

Lead time Usually in Stock

Main

Color	Black
Product or Component Type	PDU
PDU Type	Switched
Cord length	5.9 ft (1.8 m)

Complementary

Input Voltage	415 V 3 phase	
Height	71.89 in (182.6 cm)	
Width	2.20 in (5.6 cm)	
Output Voltage	240 V	
Depth	2.95 in (7.5 cm)	
Net Weight	27.3 lb(US) (12.4 kg)	
Mounting Location	Side	
Mounting preference	No preference	
Input Plug Type	IEC 60309 60 A 3P+N+PE	
Mounting Mode	Rack-mounted	
Rack units	OU	
Mounting position	Vertical	
Communication Port Protocol	1000BASE-T 10/100BASE-T	
Line Rated Current	48 A	
Acceptable Input Voltage	200240 V 346415 V	
Input current limits	60 A	
Load Capacity	34600 VA	
Input Frequency	50/60 Hz	
Outlet type and quantity	21 C13/C15/C19/C21 21C13/C15	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Product Certifications	TAA compliance BAA compliance	
Standards	UL 62368-1 CSA C22.2 No 62368-1 FCC part 15 Subpart B	
IP Degree of Protection	IP44	
Ambient Air Temperature for Operation	23140 °F (-560 °C)	
Relative Humidity	595 %	
Operating altitude	010000 ft	
Ambient Air Temperature for Storage	-13149 °F (-2565 °C)	
Storage Relative Humidity	595 %	
Storage altitude	050000 ft (015240 m)	

Ordering and shipping details

GTIN	731304439110
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	83.07 in (211 cm)	
Package 1 Width	5.20 in (13.2 cm)	
Package 1 Length	10.31 in (26.2 cm)	
Package 1 Weight	41.9 lb(US) (19 kg)	

Contractual warranty

Warranty 3 years repair or replace

Jul 10, 2025



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∅ Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	5004
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACh Regulation	REACh Declaration

Use Again

○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Image of product / Alternate images

Alternative

4-in-1 outlet for increased flexibility




Multiple color options available





APDU10450SW



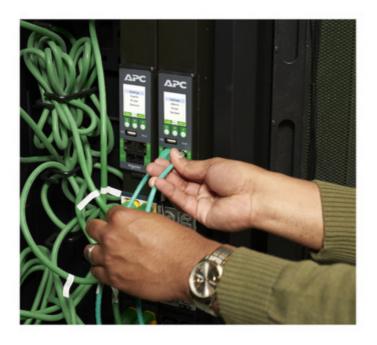





APDU10450SW





