



APC Back-UPS Pro, 1500VA, Tower, 120V, 10 NEMA 5-15R outlets, LCD, 1 USB Type C + 1 USB Type A ports

BN1500M2

### **Overview**

Lead time Usually in Stock

### Main

Mani	
Main Input Voltage	120 V
Main Output Voltage	120 V
Kw Rating	900 W
Rated power in VA	1500 VA
Product or Component Type	Uninterruptible power supply (UPS)
Input Connection Type	NEMA 5-15P
output connection type	6 NEMA 5-15R 4 NEMA 5-15R surge
Cable length	6 ft (1.8 m)
Number of cables	1
Battery Type	Lead-Acid battery
Range of Product	Back-UPS Pro

## **Batteries & Runtime**

Run Time	View Runtime Graph ☐
Efficiency	View Efficiency Graph ☐
Included Battery Modules	1
Battery Slots Empty	0
Typical recharge time	16 h
RBC Quantity	1
Battery Charge Power (Watts)	11 W rated
Battery life	35 year(s)
Replacement battery	APCRBC161 ☐
Extendable Run Time	0

### **General**

Provided equipment	Coaxial cable User Manual USB cable
Number of power module free slots	0

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Number of power module filled slots	0
Redundant	No

# **Physical**

color	Black
Height	10.2 in (260 mm)
Width	3.9 in (100 mm)
Depth	14.5 in (368 mm)
Net Weight	25.1 lb(US) (11.4 kg)
Mounting preference	No preference
Mounting Mode	Not rack-mountable
Two post mountable	0
USB compatible	No

# Input

Input Frequency	60 Hz +/- 3 Hz
Plug standard	NEMA 5-15P
Efficiency at full load	88139 V
Maximum Input Current per Phase	12 A
Switching current capacity	15 A

# Output

Max Configurable Power (Watts)	900 W
Output frequency	60 Hz +/- 3 Hz sync to mains
Topology	Line Interactive
Waveform Type	Stepped approximation to a sinewave
Maximum configurable power in VA	1500 VA
Transfer Time	8ms typical : 10 ms maximum

## Conformance

Product Certifications	ENERGY STAR V2.0 (USA) NOM TUV C-US certified
Equipment protection policy	Lifetime : \$250000

# **Environmental**

Ambient air temperature for operation	32104 °F (040 °C)
Relative Humidity	095 % non-condensing
Operating altitude	03000 ft
Ambient Air Temperature for Storage	5104 °F (-1540 °C)
Storage Relative Humidity	095 % non-condensing
Storage altitude	05000 ft (01524 m)

Acoustic level 45 dBA

## **Communications & Management**

Control panel	Multi-function LCD status and control console
Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm

# **Surge Protection and Filtering**

Surge energy rating	1080 J
Filtering	Full time multi-pole noise filtering :5% of IEEE surge let-through : zero clamping response time: in
Data line protection	Coaxial cable for CATV/SATV/modem/audio-video

# Ordering and shipping details

GTIN 731304335375

## **Packing Units**

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	15.0 in (38 cm)
Package 1 Width	19.7 in (50 cm)
Package 1 Length	9.5 in (24.1 cm)
Package weight(Lbs)	30.9 lb(US) (14 kg)
SCC14	10731304335372

# **Contractual warranty**

Warranty 3 years repair or replace



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

### Environmental footprint

Environmental Disclosure

Product Environmental Profile

#### **Use Better**

<b>⊗</b> Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
REACh Regulation	REACh Declaration
♥ Energy efficiency	
Optimized Energy Efficiency	Energy efficient product
ENERGY STAR®	ENERGY STAR UPS V2.0 (USA)

### Use Again

○ Repack and remanufacture	
Circularity Profile	End of Life Information
Removable battery	User replaceable
Take-back	Yes
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## **Product data sheet**

## BN1500M2

**Technical Illustration** 

### **Dimensions**








# Product data sheet

### BN1500M2

Offer Marketing Illustration

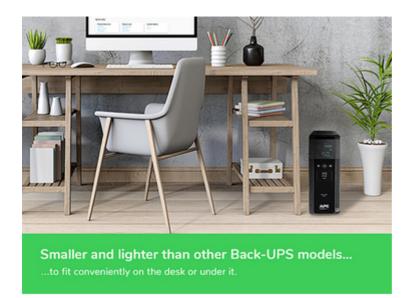

**Product benefits / Features** 



Robust battery to keep you on track

Reliable runtime allows you to continue critical activities when the power is out.

### BN1500M2

Offer Marketing Illustration



### **Product benefits / Features**



Power goes out. You stay connected to what matters.

Enjoy uninterrupted internet connection for your entertainment, smart home and security devices.

### BN1500M2

Offer Marketing Illustration

#### **Product benefits / Features**

### Peace of mind at home or office with PowerChute™ Serial Shutdown Software

UPS management, graceful shutdown, and energy management software for:







Desktops

Servers

Workstations





Image of product / Alternate images

### **Alternative**



