Product data sheet

Specifications

Plug in relay, Type N, relay socket, 11 blade, for 8510R relays

8501NR43

Product availability: Stock - Normally stocked in distribution facility

Main

[In] rated current	10 A 300 V AC

Complementary

mounting type	DIN rail Panel
electrical connection	Double tiered screw clamp terminals
package quantity	1
Width	1.6 in (40.4 mm)
Height	2.7 in (69.6 mm)
Depth	1.09 in (27.7 mm)

Ordering and shipping details

Category	US10CP221142
Discount Schedule	0CP2
GTIN	785901137290
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.200 in (3.048 cm)
Package 1 Width	1.700 in (4.318 cm)
Package 1 Length	2.800 in (7.112 cm)
Package weight(Lbs)	2.400 oz (68.039 g)

Contractual warranty

Warranty (in months)	18

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	1
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

Circularity Profile	End of Life Information
Take-back	No

Dimensions Drawings

Dimensions

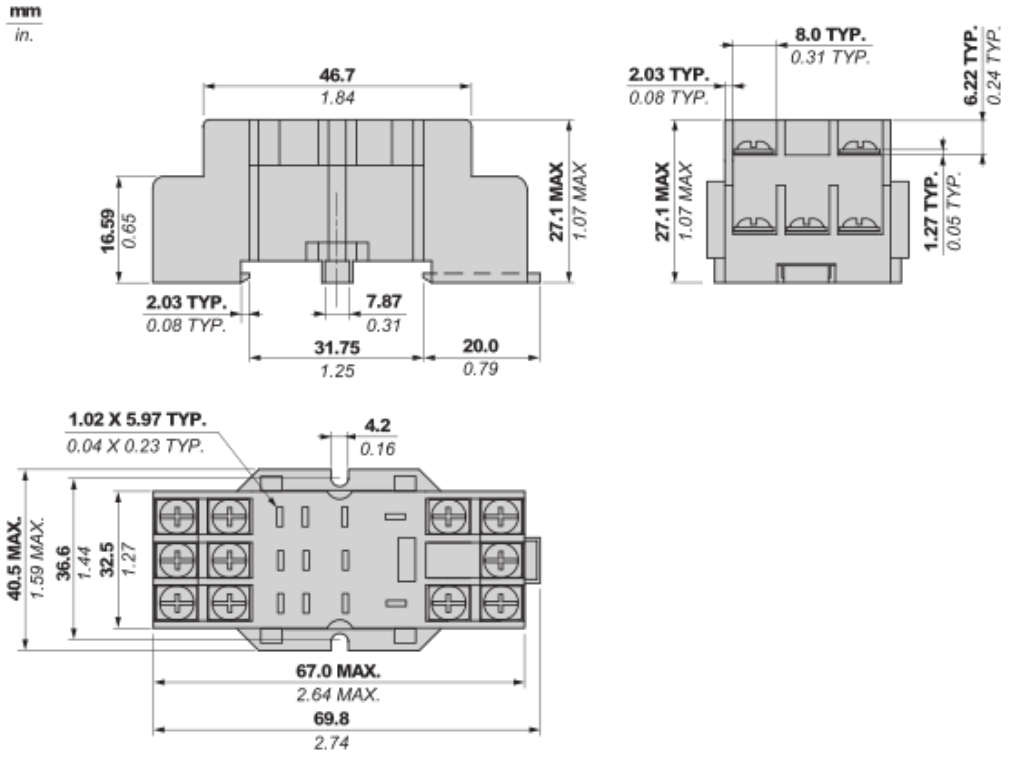

Connections and Schema
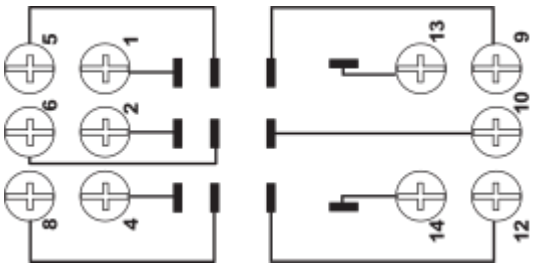
Wiring