Square D[™] MD Enclosed Motor Disconnect Switch

Increase safety and maximize space



Schneider Electric's Square D brand has been an industry leader in safety switches for over 100 years and is recognized as the market leader in product quality, durability and reliability. The latest addition to the MD motor disconnect family is a non-receptacle switch for UL 508 listed applications.

This MD motor disconnect switch serves as a local on/off switch for a motor when the motor branch circuit protection is in a central enclosure. It is in a compact NEMA 4X enclosure and is available in 30 A and 60 A versions.

Key Benefits

- Lower costs
 - Significantly less expensive than stainless steel motor disconnect switches
- Enhance safety
 - Handle interlock prevents cover from being removed while in the "ON" position
- Maximize space
 - One of smallest footprints on the market

Key Features

- Water-tight NEMA 4X polycarbonate enclosure
 - Ideal for use in wash down or rugged industrial applications
 - Covers additional enclosure types, such as NEMA 1, 12, 3R and 4
- Standard 3-pole design
- Optional additional power pole
- Available in 30 A and 60 A sizes
- Horsepower rated
- · Clear "ON/OFF" indication
- Front padlockable handle complies with OSHA lockout/tagout requirements
 - Accepts up to three 8 mm padlocks
- cULus certified
 - UL File E164864

© 2011 Schneider Electric. All Rights Reserved. Square D is a trademark or registered trademark of Schneider Electric and/or its affiliates in the United States and/or other countries. Other marks used herein may be the property of their respective owners.


Square D MD Enclosed Motor Disconnect Switch

NEMA 4X Enclosed Switches					
Listed	Maximum Horsepower Ratings			Catalog Number	
	220-240 VAC	440-480 VAC	600 VAC		
UL 508	7.5	20	25	MD3304X	
UL 508	20	40	40	MD3604X	

Accessories				
Description	Catalog Number			
2 normally open auxiliary contact module	MDSAN20			
1 normally open + 1 normally closed auxiliary contact module	MDSAN11			
Additional power pole – 30 A	MDS30P			

30 A Enclosed Switch Mounting Diagram

60 A Enclosed Switch Mounting Diagram

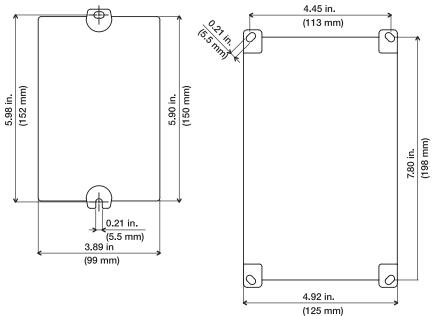



Put Our Expertise to Work for You

For more information on Square D brand enclosed switches, visit us online at www.Schneider-Electric.us or talk to one of our experts at 1-888-778-2733.

Schneider Electric USA, Inc.

1415 S. Roselle Road Palatine, IL 60067 Tel: 847-397-2600 Fax: 847-925-7500 www.schneider-electric.us