
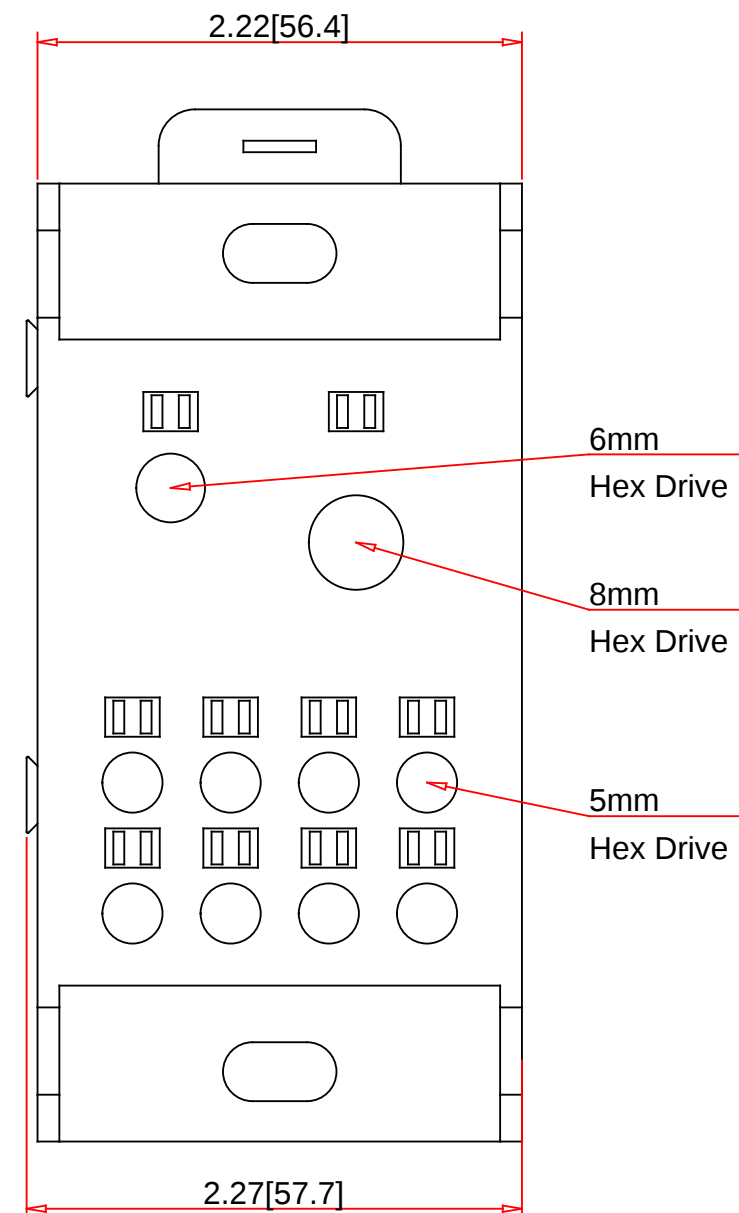


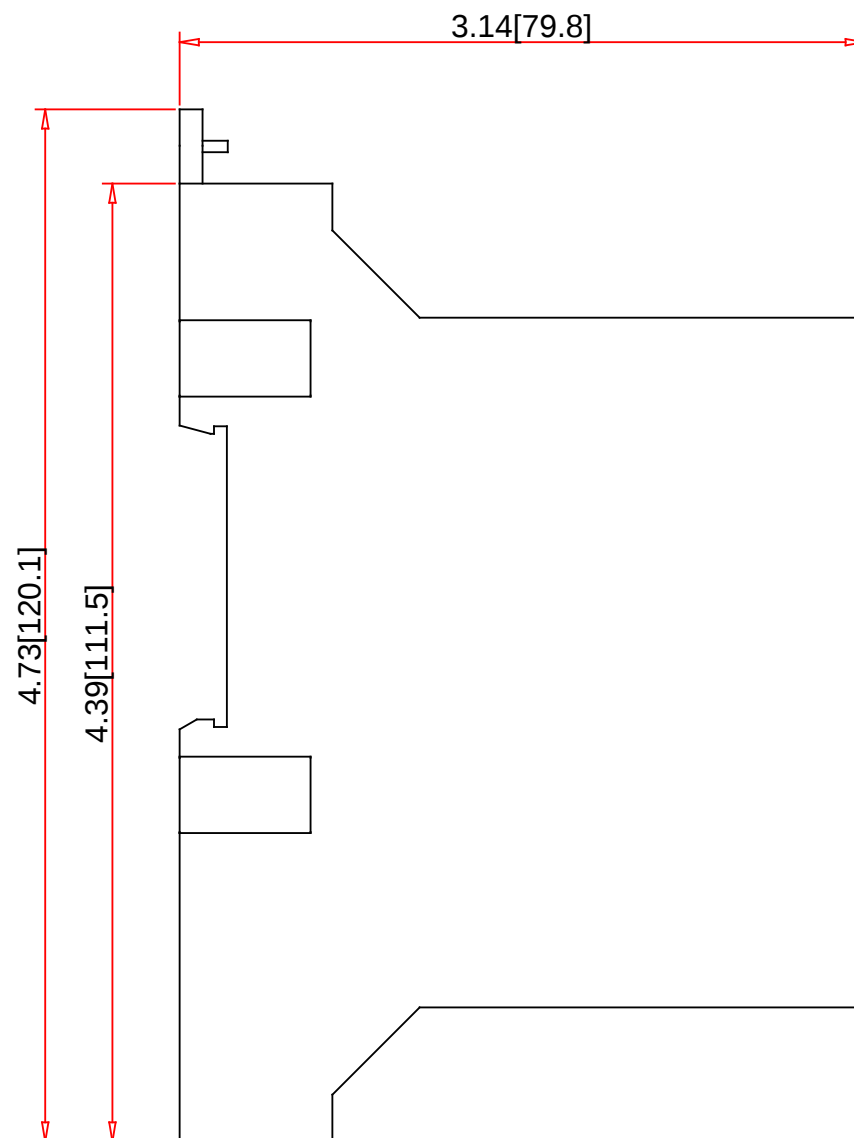


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

NSYEBCD13618

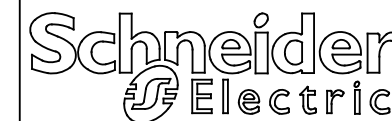

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Copper Wire
1.68
8 mm & 6 mm Hex
5 mm Hex
N/A
E60616 XCFR2
File 70361, Class 6228-01 (With wire classes B&C)
Yes
Yes
Yes
UL 94 V0

Description:
Mounting:
Ampere Rating:
Max. Voltage Rating:
Terminal Material:
Wire Range - Line Side AWG/kcmil:
Wire Range - Load Side AWG/kcmil:
Short Circuit Current Ratings with Fuses:

Specification:

Enclosed Power Distribution Block
35 mm DIN rail
335 Amps CU
600V AC/DC
Tin Plated Copper
6 - 400 & 14 - 3/0 CU
14 - 2 CU
10kA