


Siemens Industry, Inc.  
Norcross, Ga 30092 U.S.A.

For questions call 1-800-241-4453 or our web site:  
<http://www.usa.siemens.com/dpd>

## Installation Instructions for Standard Neutral Kit



**⚠ DANGER**

**Hazardous voltage.**  
Will cause death or serious injury.

Turn off and lock out all power supplying this Safety Switch before installing kit.

Replace the covers and shields before restoring power to switch.

4. Torque neutral mounting screws to 29 lb.-ins. to attach neutral to enclosure.
5. Install wires and torque wire grips to the values listed in the Torque Table on the interior label.
6. When bonding is required, insert green thread rolling screw and torque to 29 lb.-ins., see Fig. 2.
7. Close cover before supplying power to this switch.



### SAFETY INSTRUCTIONS

**Note:** This instruction outlines recommended installation procedure.

1. Turn OFF and lock out the power supplying the Safety Switch.
2. Turn the Safety Switch OFF.
3. Place Neutral inside switch enclosure as shown in Fig. 1.

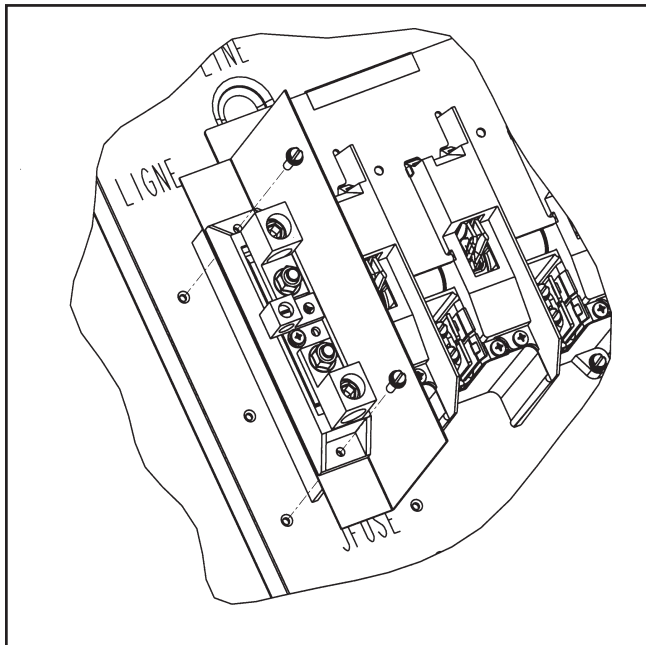


Fig. 1

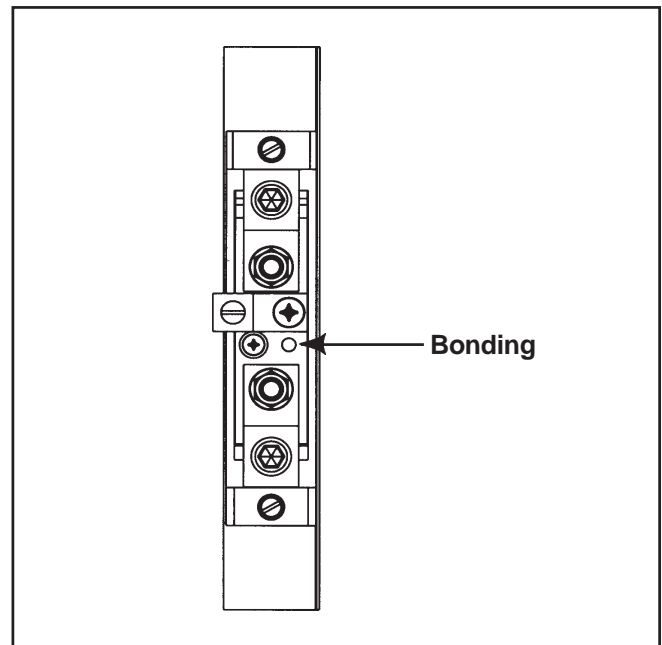


Fig. 2