

DESCRIPTION


Reflector Cone trim for use with the H5 series housings. Reflector with dual position socket support for BR30 or PAR lamps.

DESIGN FEATURES

Torsion springs pull trim tight to ceiling. Straight sided trim ring coordinates with die cast Halo 3' and 4" trims.

LAMP LISTINGS

H5ICAT	60W BR30, 75W PAR30
H5RICAT	50W PAR30, 50W PAR30L, 60W BR30
H5RT H5RT	65W BR30, 75W R30, 75W PAR30

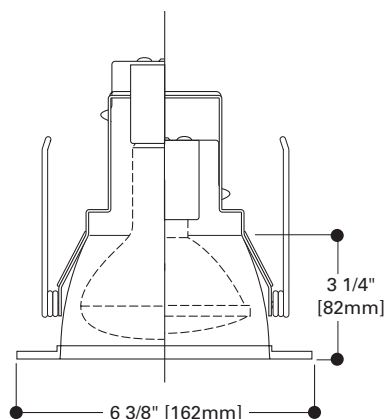

PHOTOMETRICS

H5T-5020SC 75W PAR30FL 1100 Lumens			H5T-5020SC 75W R30FL 900 Lumens		
Dia	FC	Work Plane	Dia	FC	Work Plane
3'0"	78	5'6"	14	6'0"	
4'0"	56	6'6"	10	7'0"	
5'0"	37	8'0"	7	9'0"	
6'0"	23	10'0"	4	11'0"	
7'0"	16	12'0"	3	13'0"	

Test Nos. H36035 and H36049
Work Plane is 2 1/2 ft above floor
Dia of circle is 50% of max footcandles directly under fixture

Catalog #		Type
Project		
Comments		Date
Prepared by		



5020SC

White with Clear Reflector



5020H

White with Haze Reflector



5020P

White with White Reflector



5020RG

White w/ Residential Gold Reflector



5020BL

White with Black Reflector



5020SN

Satin Nickel



5020AC

Antique Copper



5020TBZ

Tuscan Bronze

5020

5" Reflector Cone

ADV071129
6/07

Trim	Finish	Accessory
5020=5" Reflector Cone Trim	SC=White Trim Ring with Specular Clear Reflector P=White Trim Ring with White Reflector RG=White Trim Ring with Residential Gold Reflector BL=White Trim Ring with Black Reflector H=White Trim Ring with Haze Reflector SN=Satin Nickel Trim Ring with Satin Nickel Reflector AC=Antique Copper Trim Ring with Antique Copper Reflector TBZ=Tuscan Bronze Trim Ring with Tuscan Bronze Reflector	OT500P=5" Oversize Trim Ring

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com