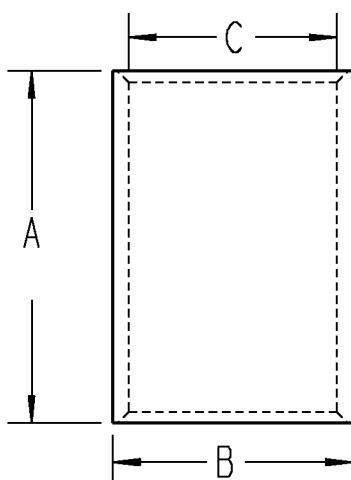


**T&B Sta-Kon**

MATERIAL: TIN-PLATED COPPER

RANGE: 22AWG TO 500 MCM

TOOLS:

A, B AND C SERIES : ERG2002, WT110M

WT111M, WT2000

D SERIES: WT-115A, TBM8-750MI

TBM8-750BSCR

E SERIES: TBM8-750MI, TBM8-750BSCR

ERG2008 (6 AWG DIE)

F THRU R SERIES: TBM8-750MI

TBM8-750BSCR

ALL DIMENSIONS ARE APPROXIMATE, FOR REFERENCE ONLY.

| CAT<br>NUMBER | WIRE RANGE    |                | CIR MIL<br>RANGE | LENGTH<br>A | O.D.<br>B | I.D.<br>C |
|---------------|---------------|----------------|------------------|-------------|-----------|-----------|
|               | MIN.          | MAX.           |                  |             |           |           |
| A18-PS-M      | 2#22          | 1#22, 1#16     | 509-3,260        | 0.314       | 0.129     | 0.086     |
| B14-PS-M      | 2#20          | 1#14, 1#20     | 2,050-5,180      | 0.315       | 0.155     | 0.113     |
| C10-PS-D      | 2#16          | 1#10, 1#16     | 5,180-13,100     | 0.380       | 0.220     | 0.170     |
| D8-PS-D       | 1#10, 1#14    | 2#10           | 13,100-20,800    | 0.375       | 0.260     | 0.180     |
| E6-PS-D       | 2#10, 1#14    | 2#10, 3#14     | 20,800-33,100    | 0.500       | 0.365     | 0.266     |
| F4-PS-W       | 2#8, 1#14     | 2#6            | 33,100-52,600    | 0.531       | 0.410     | 0.302     |
| G2-PS-W       | 3#8, 1#14     | 2#4            | 52,600-83,700    | 0.640       | 0.521     | 0.396     |
| H1/0-PS-C     | 6#8           | 2#4, 1#6       | 83,700-119,500   | 0.750       | 0.571     | 0.446     |
| J2/0-PS-C     | 3#4           | 1#1, 1#2       | 119,500-150,500  | 0.750       | 0.632     | 0.507     |
| K3/0-PS-L     | 4#4           | 2#1, 2#10      | 150,500-190,000  | 0.750       | 0.701     | 0.564     |
| L4/0-PS-L     | 3#2           | 1#1/0, 3#4     | 190,000-231,100  | 0.770       | 0.766     | 0.629     |
| M250-PS-Q     | 1#3/0, 4#8    | 1#3/0, 8#8     | 231,100-300,000  | 1.063       | 0.926     | 0.749     |
| N300-PS-X     | 1#2/0, 4#4    | 1#300MCM, 3#6  | 300,000-380,000  | 1.125       | 1.100     | 0.882     |
| P400-PS-X     | 1#250MCM, 5#6 | 1#4/0, 4#2     | 380,000-478,000  | 1.250       | 1.200     | 0.956     |
| R500-PS-V     | 1#400MCM, 3#6 | 1#250MCM, 13#6 | 478,000-600,000  | 1.438       | 1.330     | 1.060     |

**GENERAL NOTES**

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.

**REVISIONS**

2. SEE ERN ( 2007805 ) FOR APPROVAL SIGNATURES & RELEASE DATE.  
PROJECT NO: TM401341

**Thomas & Betts**  
www.tnb.com

DESCRIPTION:

**STA-KON  
PARALLEL SPLICES**

ORIGINAL PROJECT NO / ( ERN NO )

TM401330 / ( 2006308 )

SHEET NO:

1 OF 1

REV. NO:

2

DRAWING NO:

WSD-000229

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEViate FROM ANY OF THE DETAILS SHOWN HEREON.

©2006 Thomas &amp; Betts - Proprietary. All Rights Reserved