

H361AWK

Safety switch, heavy duty, fusible, 30A, 3 poles, 20 hp, 20 hp, 600 VAC/DC, NEMA 12



Main

Product	Single Throw Safety Switch
Current Rating	30 A
Number of Poles	3
Voltage Rating	600 V AC/DC
Wire Size	AWG 12...AWG 6 aluminium AWG 14...AWG 6 copper
Disconnect Type	Fusible disconnect
Short Circuit Current Rating	10 KA H or K 200 kA R, J or L
Mounting Type	Surface
Factory Installed Neutral	None
Electrical Connection	Lugs
Duty Rating	Heavy duty
Certifications	UL listed file E2875
Enclosure Rating	NEMA 3R/12 galvanized steel

Complementary

Maximum Horse Power Rating	5 Hp 480 V AC 50...60 Hz 3 phase NEC 240.6 15 Hp 480 V AC 50...60 Hz 3 phase NEC 430.52 7.5 Hp 600 V AC 50...60 Hz 3 phase NEC 240.6 20 Hp 600 V AC 50...60 Hz 3 phase NEC 430.52 5 Hp 250 V DC 15 hp 600 V DC
Maximum Width	7.55 in (191.77 mm)
Height	14.6 in (370.84 mm)
Depth	4.96 in (125.98 mm)
Tightening torque	45 Lbf.in (5.08 N.m) 0.02 in ² (13.3 mm ²) AWG 6) 4.52 N.M for 8.367 mm ² (AWG 8) 3.95 N.m for 2.06...5.261 mm ² (AWG 14...AWG 10)

Ordering and shipping details

Category	00113 - H&HU SW,2&3P,N12,30-200A
Discount Schedule	DE1
GTIN	00785901481997
Nbr. of units in pkg.	1
Package weight(Lbs)	10.58 lb(US) (4.80 kg)
Returnability	Yes
Country of origin	US

Packing Units

Package 1 Height	5.50 in (13.970 cm)
Package 1 width	7.50 in (19.050 cm)
Package 1 Length	17.50 in (44.450 cm)

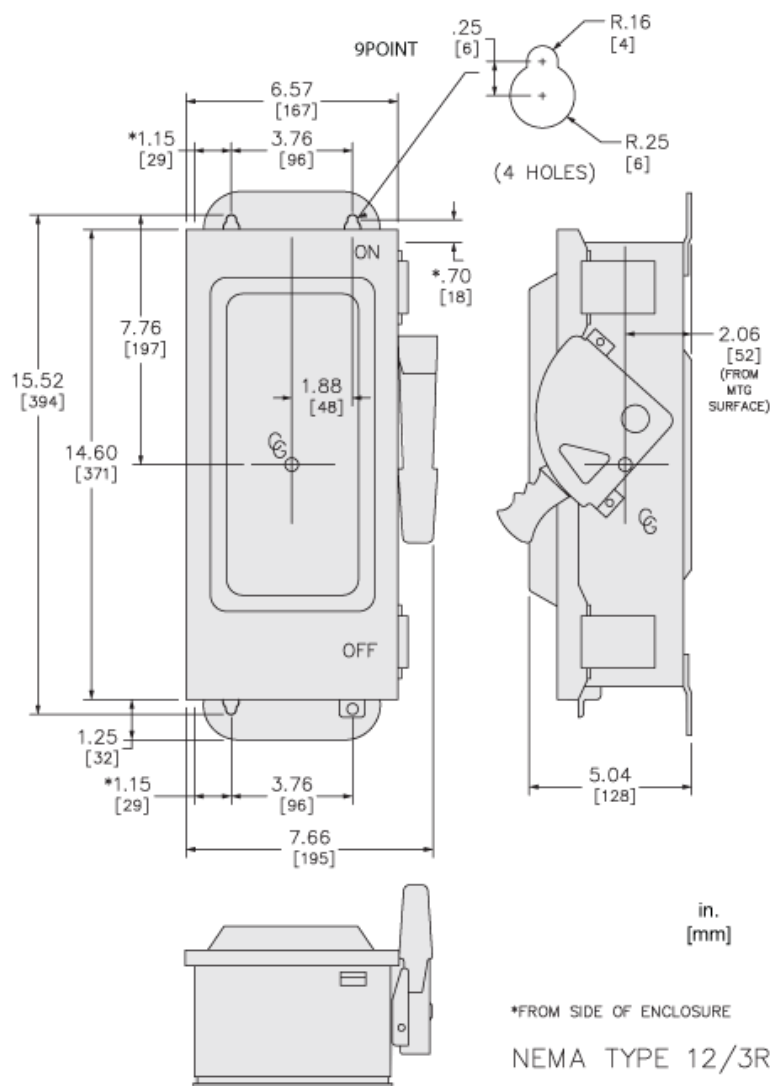
Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
PVC free	Yes




Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions



Connections and Wiring Diagrams

WIRING DIAGRAMS		
FUSIBLE		NOT FUSIBLE
		
H221AWK	H321AWK H361AWK	HU361AWK HU361AWKEI