


PLASTER PLUGS

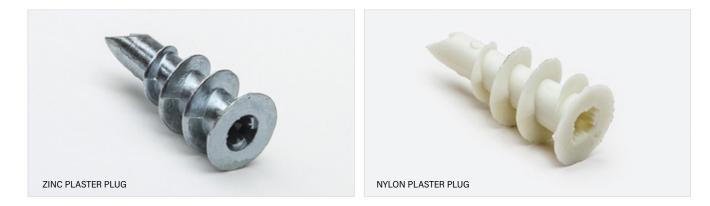

PRODUCT DESCRIPTION

The Plaster Plug is a one-piece self drilling anchor designed for use in hollow gypsum wallboard for light to medium duty loads. It is available in both engineered nylon and Zamac alloy for use with No. 8 screws in 10-25mm thick wallboard.

INSTALLATION SPECIFICATIONS

Dimensions	Zinc Plaster Plug	Nylon Plaster Plug
Collar (size)	9/16	9/16
Screw Size Range (No.)	8,10	6,8
Thread Length (in.)	15/16	15/16
Point Length (in.)	0.3	3/4
Anchor Length (in.)	1-5/16	1-11/16
Min. Screw Engagement (in.)	3/4	3/4

PERFORMANCE DATA

ALLOWABLE LOAD CAPACITIES IN WALLBOARD

	3/8" Wallboard		1/2″ Wallboard		5/8″ Wallboard		3/4" Wallboard	
Anchor	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear
	Ibs.	Ibs.	Ibs.	Ibs.	Ibs.	Ibs.	Ibs.	Ibs.
	(kN)	(kN)	(kN)	(kN)	(kN)	(kN)	(kN)	(kN)
Plaster Plugs	15	15	15	20	20	25	20	25
	(0.1)	(0.1)	(0.1)	(0.1)	(0.1)	(0.1)	(0.1)	(0.1)

Allowable load capacities listed are calculated using an applied safety factor of 4.0.