Product data sheet

Specifications

Contactor, Definite Purpose, 60A, 3 pole, 30HP at 575VAC, 3 phase, 208/240VAC 60Hz 220VAC 50Hz coil, open

8910DPA63V09Y125

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Definite Purpose Contactor
Line Rated Current	60 A
Number of Poles	3P
Pole contact composition	3 NO
Range of Product	DPA

Complementary

Maximum Horse Power Rating	5 hp 115 V AC, 1 phase 10 hp 230 V AC, 1 phase 30 hp 460 V AC, 3 phase 30 hp 575 V AC, 3 phase 25 hp 230 V AC, 3 phase
Locked rotor rated current	360 A 277 V AC 300 A 460 V AC 240 A 575 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	208...240 V AC 60 Hz 220 V AC 50 Hz
Phase	3 phase
Electrical Connection	Screw terminal Quick connect terminals

Environment

Product Certifications	UL Recognized CSA

Ordering and shipping details

Category	US1CP1B21346
Discount Schedule	CP1B
GTIN	785901375876
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Height	2.700 in (6.858 cm)
Package 1 Width	3.900 in (9.906 cm)
Package 1 Length	4.400 in (11.176 cm)
Package weight(Lbs)	24.160 oz (684.924 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	8
Package 2 Height	8.500 in (21.590 cm)
Package 2 Width	6.000 in (15.240 cm)
Package 2 Length	9.000 in (22.860 cm)
Package 2 Weight	12.220 lb(US) (5.543 kg)

Contractual warranty

Warranty	18 months

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained

How we assess product sustainability

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant with Exemptions**
SCIP Number	**9635bca0-88f5-4211-aaa3-d012e1850a41**
REACh Regulation	**REACh Declaration**

Use Again

Repack and remanufacture

Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Dimensions Drawings

Approximate Dimensions

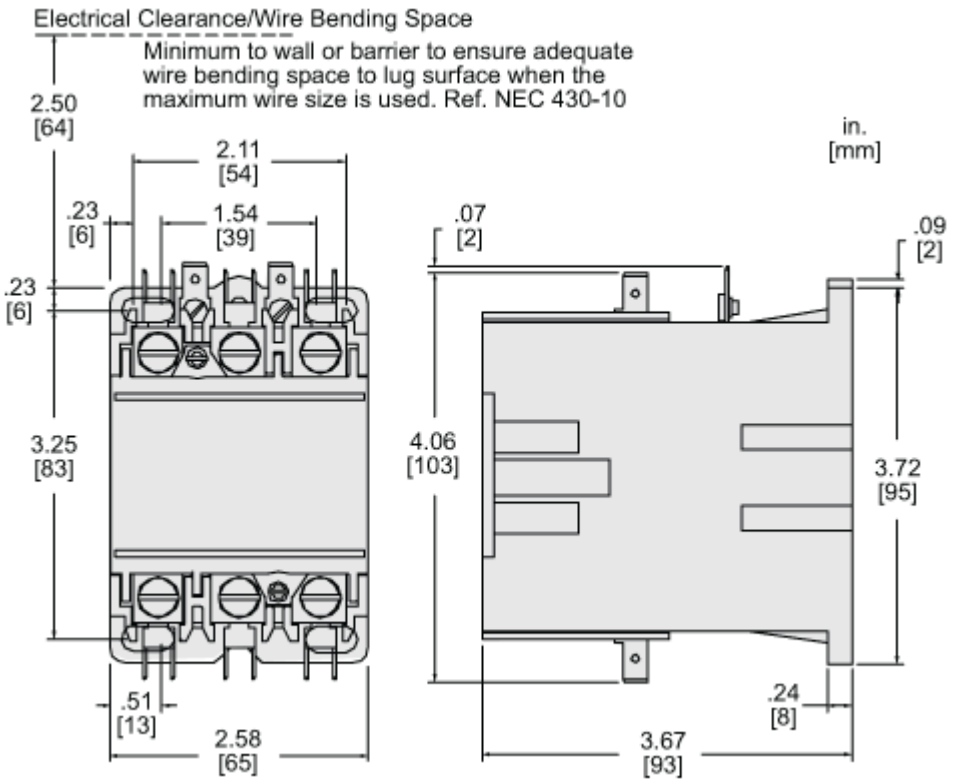

Technical Illustration
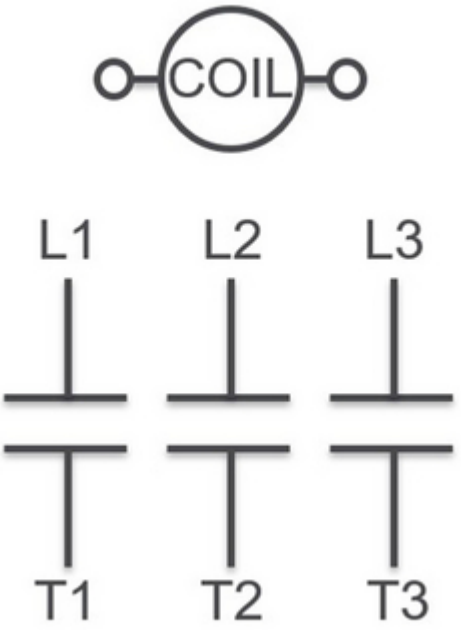
Wiring diagram