

3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits

7600-3-RJS Series

5, 8, 15, 25/28 and 35 kV

Data Sheet

April 2013

Product Description

3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kit , 7600-3-RJS Series, are designed to accommodate medium voltage 3/C shielded power cable kits for 7600-3-RJS Series cabinet-mount installations and can be used on cables with or without ground wires.

Each termination kit is supplied with all the materials required for terminating one three conductor cable. (Terminal or lug is not included in the kit and must be ordered separately. Consult the 3M Electrical Products Catalog.)

All main termination components are produced from color-matched dark gray silicone rubber. These components are:

Rejacketing Sleeve Assembly – A tubular silicone rubber insulating sleeve that incorporates an inner-expandable polyester braid designed to reduce sliding friction, and deliver the silicone tubing onto the cable phase metallic shielding. Rejacketing sleeves are designed to protect the shielded cable phase legs from exposure to moisture, corrosion, ozone, ultraviolet radiation, physical contact and other hazards associated with termination operating environments.

QT-III Termination – A one-piece cold shrink assembly that consists of skirted or tubular insulator, high dielectric constant (High-K) stress control mastic and a built-in environmental top sealing compound. The complete assembly is pre-stretched and loaded onto a removable plastic core. Core removal allows the termination assembly to shrink down and seal onto prepared cable phase insulation and lug barrel surfaces.

Kit Contents

- 3 - High-K, Tracking Resistant, Silicone Rubber Terminations
- 3 - Silicone Rubber Phase Rejacketing Sleeve Assemblies
- 3 - Constant Force Springs
- 1 - Pre-formed Ground Braid
- 3 – Strips 3M™ EMI Copper Foil Shielding Tape 1181
- 1 - 3M™ Cable Cleaning Preparation Kit CC-2
- 1 - Instruction Sheet

3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS

Features

- Versatile: Installs quickly and accommodates a wide range of cable sizes
- No torches or heat required
- Excellent thermal stability
- Good solvent resistance, compatible with industry-approved cable cleaners
- Excellent resistance to ozone and ultra-violet radiation
- High dry and wet insulation resistance
- Highly flexible : Accommodates most power cable supplier bend radius recommendations
- Seals tight : Retains resiliency and pressure even after prolonged years of aging and exposure
- One-piece versatile design, allowing quick installation and accommodating a wide range of cable sizes.
- Cold Shrink delivery system for easy installation: Simply place termination over prepared cable and unwind core to shrink into place (no force fit required)
- High-K stress control: Specially formulated high dielectric constant material minimizes surface stress by more uniformly distributing the electrical field over the entire surface of the insulator
- Compact design provides for easier installation in restricted spaces
- Silicone rubber insulators, EPDM stress control tubes, stress controlling compound and environmental sealing compound are compatible with all common solid dielectric insulations, such as polyethylene (PE), cross-linked polyethylene (XLPE) and ethylene propylene rubber (EPR)
- Conforms to the IEEE Standard 48 Class 1 requirements for 5, 8,15, 25/28 and 35 kV

Applications

The 3M™ Cold Shrink QT-III Rubber Three-Conductor Termination Kit 7600-3-RJS Series is designed for/to:

- 5, 8, 15, 25/28 and 35 kV classes
- Accommodate three conductor power cables ranging from 8 AWG (8 mm²) @ 3 kV to 500 kcmil (240 mm²) @ 35 kV.
- Shielded cables
- Solid dielectric insulations, such as polyethylene, XLPE and EPR
- Protected and weather-exposed contaminated locations (Skirted 7600-S-3-RJS and 7600-S-INV-3-RJS versions)
- Contaminated and non-contaminated indoor (weather-protected) locations (Tubular,7600-T-3-RJS versions)
- Free-hanging or bracket-mounting arrangements
- Upright or inverted installations (Tubular, 7600-T-3-RJS, or Skirted inverted, 7600-INV-3-RJS)
- These terminations can be field tested using normal cable testing procedures (reference: ANSI/IEEE Standard 400 "Guide for Field Testing and Evaluation of the Insulation of Shielded Power Cable Systems." Refer to most recent version).

3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS

Typical Performance

Some termination technical information is beyond the scope of this document. If additional information is desired, please see the individual component data sheet listed below.

Component	Product No. Reference
Rejacketing Sleeve	RJS- Series
QT-III Termination	7620/7680/7690 Series

Ratings

3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kit, 7600-3-RJS Series can be used on cables rated with a continuous operating temperature of 221°F(105°C) and emergency overload temperature of 284°F(140°C).

7600-3-RJS Series terminations meet or exceed the current rating of the cables on which they are installed.

7600-3-RJS Series terminations are Class 1 designated products according to Standard IEEE-48 definition.

**Environmental
Performance**


Material Characteristics

Hydrophobicity

When airborne contaminants are deposited on a termination surface, destructive leakage currents can initiate when the surface becomes wet. Fog and drizzle are normally considered to be worse than rain as these two forms of precipitation can combine with accumulated surface contaminants to reduce surface resistivity making the surface conducive to varying degrees, promoting leakage current formation. Rain tends to wash the pollutants off the termination surface.

The inherent hydrophobic nature of the silicone rubber compound used to make 3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kit 7600-3-RJS Series components tends to reject moisture accumulation, and thereby, reduces the probability for discharge-initiated material erosion and tracking.

On occasion, severe environmental conditions that are sustained for long time periods can cause any polymeric surface to lose its hydrophobicity. Because of this, EPD polymers and others tend to lose their hydrophobic nature over time. Porcelain surfaces become increasingly hydrophilic with time, which can result in premature failure or flashover. Silicone surfaces can regenerate their hydrophobic character. The Silicone insulator surface will re-establish its hydrophobic surface within 24 hours. This unique ability is a major factor for ensuring a long service life.

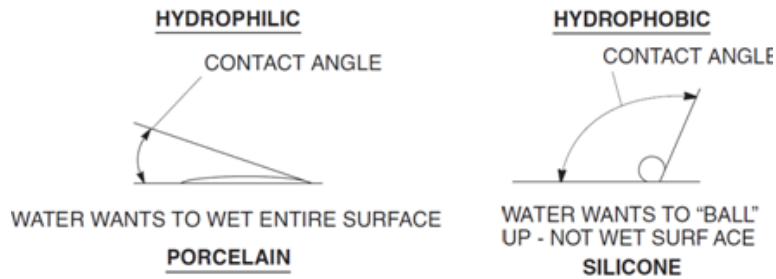

Ozone, Heat and UV Resistance


One of the most outstanding physical characteristics of silicone rubber is its retention of desirable properties over the very wide temperature range of -150°F (-100°C) to 600°F (315°C). While there are applications that take advantage of these temperature extremes, a more attractive feature might be that of its extremely long life expectancy at moderate operating temperatures.

The silicone polymer molecular backbone, silicone-oxygen linkage, provides the same strong -Si-O-Si- type bond occurring in quartz, sand and glass, which accounts for the outstanding temperature properties of silicones and their resistance to oxidation by ozone, corona and weathering. Polymer chains from organic rubber materials often have double carbon bond molecular backbones, which are quickly cleaved by ozone, ultraviolet light, heat or other influences found in the operating environment.


3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS

Termination Type Selection Table


Product Number (Kit Series)	Insulator Configuration	Installation Environment	Orientation	For Cable Type(s) (With or without Ground Wires)
7600-S-3-RJS	Skirted	Indoor-Cabinet Mount (No Breakout Boot)	Normal	G or W (With or Without)
7600-T-3-RJS	Tubular	Indoor-Cabinet Mount (No Breakout Boot)	Normal	G or W (With or Without)
7690-S-INV-3-RJS	Skirted	Indoor-Cabinet Mount (No Breakout Boot)	Inverted	G or W (With or Without)

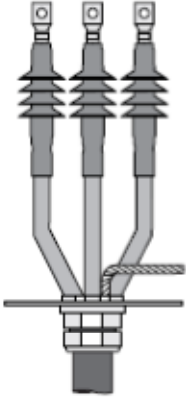

7600-S-3RJS

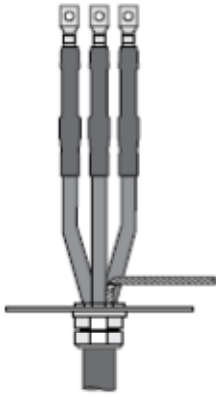

7600-T-3RJS

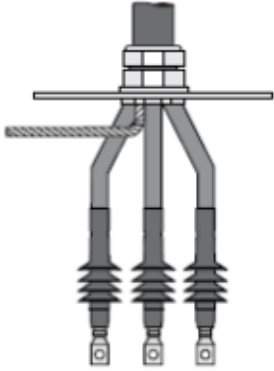

7690S-INV-3RJS

7690-S-INV-3-RJS Series Termination Selection Table

Kit Number	Cable Insulation Range Inches	3.3 kV (mm ²) IEC	3.3 kV (mm ²) JIS	5.0 kV (kcmil) AEIC	6.6 kV (mm ²) JIS	6.6 kV (mm ²) IEC	8 kV (kcmil) AEIC	10 kV (mm ²) IEC	15 kV (mm ²) IEC	15 kV (kcmil) AEIC	20 kV (mm ²)	25/28 kV (AWG, kcmil) AEIC
7693-S-4-INV-3-RJS	0.92-1.18 (23,4-30,0)	240-300	200-250	500-750	150-250	185-300	400-600	185-300	120-185	250-450	95-185	2/0-250
7695-S-4-INV-3-RJS	1.18-1.52 (30,0-38,6)	--	300-325	800-1000	300-325	--	750-1000	--	200-325	500-750	250-300	300-500

Final determining factor is cable insulation diameter. Listed insulation ranges allow + 0,10" (2,54 mm) for shielding.

3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS

7600-S-3-RJS Series Termination Selection Table – OUS Sizing

Kit Number	BIL (kV)	Cable Insulation Range [inch(mm)]	3.3 kV (mm ²) IEC	3.3 kV (mm ²) JIS	6.6 kV (mm ²) JIS	6.6 kV (mm ²) IEC	10 kV (mm ²) IEC	15 kV (mm ²) IEC	20 kV (mm ²) IEC	30 kV (mm ²) IEC
7620-S-2-3-RJS	95	0.33–0.50 (8,40–12,7)	16-35	8-22	—	16-25	—	—	—	—
7621-S-2-3-RJS	95	0.50–0.70 (12,7–17,8)	50-95	38-60	—	35-70	10-50	16-25	—	—
7622-S-2-3-RJS	110	0.70–0.92 (17,8–23,4)	120-185	100-150	60-100	95-150	70-150	35-95	—	—
7691-S-4-3-RJS	150	0.50–0.70 (12,7–17,8)	50-95	38-60	—	35-70	10-50	16-25	—	—
7692-S-4-3-RJS	150	0.70–0.92 (17,8–23,4)	120-185	100-150	60-100	95-150	70-150	35-95	25-70	—
7693-S-4-3-RJS	150	0.92–1.18 (23,4–30,0)	240-300	200-250	150-250	185-300	185-300	120-185	95-185	—
7695-S-4-3-RJS	150	1.18–1.52 (30,0–38,6)	—	300-325	300-325	—	—	200-325	240-300	—
7684-S-8-3-RJS	200	0.92–1.18 (23,4–30,0)	240-300	200-250	150-250	185-300	185-300	120-185	95-185	35-70
7685-S-8-3-RJS	200	1.18–1.52 (30,0–38,6)	—	300-325	300-325	—	—	200-325	240-300	95-240
7686-S-8-3-RJS	200	1.53-1.81 (38,8-46,0)	—	—	—	—	—	—	—	240-325

Final determining factor is cable insulation diameter. Listed insulation ranges allow + 0,10" (2,54 mm) for shielding.

7600-S-3-RJS Series Termination Selection Table – North American Sizing

Kit Number	BIL (kV)	Cable Insulation Range [inch (mm)]	5 kV 100% AEIC	5 kV 133% AEIC	15 kV 100% AEIC	15 kV 133% AEIC	25/28 kV 100% AEIC	25/28 kV 133% AEIC	35 kV 100% AEIC	35 kV 133% AEIC
7620-S-2-3-RJS	95	0.33-0.50 (8,40-12,7)	8-2	6-4	—	—	—	—	—	—
7621-S-2-3-RJS	95	0.50-0.70 (12,7-17,8)	1-3/0	2-2/0	2-1	—	—	—	—	—
7622-S-2-3-RJS	110	0.70-0.92 (17,8-23,4)	4/0-350	3/0-350	1/0-4/0	2-3/0	—	—	—	—
7691-S-4-3-RJS	150	0.50-0.70 (12,7-17,8)	1-3/0	2-2/0	2-1	—	—	—	—	—
7692-S-4-3-RJS	150	0.70-0.92 (17,8-23,4)	4/0-350	3/0-350	1/0-4/0	2-1/0	1-3/0	—	—	—
7693-S-4-3-RJS	150	0.92-1.18 (23,4-30,0)	400-500	400-500	250-350	4/0-350	2/0-250	1-4/0	—	—
7695-S-4-3-RJS	150	1.18-1.52 (30,0-38,6)	700-1000	700-1000	500-750	500-750	350-500	250-500	—	—
7684-S-8-3-RJS	200	0.92-1.18 (23,4-30,0)	—	—	250-350	4/0-350	2/0-250	1-4/0	1/0-3/0	—
7685-S-8-3-RJS	200	1.18-1.52 (30,0-38,6)	—	—	500-750	500-750	350-500	250-500	4/0-500	1/0-350
7686-S-8-3-RJS	200	1.53-1.81 (38,8-46,0)	—	—	—	1000	750	500-750	500-750	350-750

Final determining factor is cable insulation diameter. Listed insulation ranges allow + 0,10" (2,54 mm) for shielding.

3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS

7600-T-3-RJS Series Termination Selection Table - OUS Sizing

Kit Number	BIL (kV)	Cable Insulation Range inch (mm)	3.3 kV (mm ²) IEC	3.3 kV (mm ²) JIS	6.6 kV (mm ²) JIS	6.6 kV (mm ²) IEC	10 kV (mm ²) IEC	15 kV (mm ²) IEC	20 kV (mm ²) IEC
7620-T-95-3-RJS	95	0.33–0.50 (8,40–12,7)	16–35	8–22	—	16–25	—	—	—
7621-T-95-3-RJS	95	0.50–0.70 (12,7–17,8)	50–95	38–60	—	35–70	10–50	16–25	—
7623-T-95-3-RJS	95	0.70–0.92 (17,8–23,4)	120–185	100–150	—	95–150	70–150	35–95	—
7624-T-95-3-RJS	95	0.92–1.18 (23,4–30,0)	240–300	200–250	—	185–300	185–300	120–185	—
7625-T-95-3-RJS	95	1.18–1.52 (30,0–38,6)	—	300–325	—	—	—	200–325	—
7621-T-110-3-RJS	110	0.50–0.70 (12,7–17,8)	50–95	38–60	14–38	35–70	10–50	16–25	—
7622-T-110-3-RJS	110	0.70–0.92 (17,8–23,4)	120–185	100–150	60–100	95–150	70–150	35–95	—
7624-T-110-3-RJS	110	0.92–1.18 (23,4–30,0)	240–300	200–250	150–250	185–300	185–300	120–185	—
7625-T-110-3-RJS	110	1.18–1.52 (30,0–38,6)	—	300–325	300–325	—	—	200–325	—
7624-T-125-3-RJS	125	0.92–1.18 (23,4–30,0)	240–300	200–250	150–250	185–300	185–300	120–185	95–185
7625-T-125-3-RJS	125	1.18–1.52 (30,0–38,6)	—	300–325	300–325	—	—	200–325	240–300
7693-T-150-3-RJS	150	0.70–0.92 (17,8–23,4)	120–185	100–150	60–100	95–150	70–150	35–95	25–70
7694-T-150-3-RJS	150	0.92–1.18 (23,4–30,0)	240–300	200–250	150–250	185–300	185–300	120–185	95–185
7695-T-150-3-RJS	150	1.18–1.52 (30,0–38,6)	—	300–325	300–325	—	—	200–325	240–300
7696-T-150-3-RJS	150	1.53–1.81 (38,8–46,0)	—	—	—	—	—	200–325	300–400

Final determining factor is cable insulation diameter. Listed insulation ranges allow + 0,10" (2,54 mm) for shielding.
150 kV impulse level meets the impulse requirements for 35 kV class equipment where indoor terminations are used.


3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS

7600-T-3-RJS Series Termination Selection Table - North America Sizing

Kit Number	BIL (kV)	Cable Insulation Range [inch (mm)]	CONNECTOR SIZE RANGE (AWG and kcmil)									
			5 kV		8 kV		15 kV		25/28 kV		35 kV	
			100%	133%	100%	133%	100%	133%	100%	133%	100%	133%
7620-T-95-3-RJS	95	0.33–0.50 (8,40–12,7)	8–2	6–4	6–4	6–4	–	–	–	–	–	–
7621-T-95-3-RJS	95	0.50–0.70 (12,7–17,8)	1–3/0	2–2/0	2–2/0	2–2/0	–	–	–	–	–	–
7623-T-95-3-RJS	95	0.70–0.92 (17,8–23,4)	4/0–350	3/0–350	3/0–350	3/0–350	–	–	–	–	–	–
7624-T-95-3-RJS	95	0.92–1.18 (23,4–30,0)	400–500	400–500	400–500	400–500	–	–	–	–	–	–
7625-T-95-3-RJS	95	1.18–1.52 (30,0–38,6)	700–1000	700–1000	700–1000	700–1000	–	–	–	–	–	–
7621-T-110-3-RJS	110	0.50–0.70 (12,7–17,8)	1–3/0	2–2/0	2–2/0	2–2/0	2–1	–	–	–	–	–
7622-T-110-3-RJS	110	0.70–0.92 (17,8–23,4)	4/0–350	3/0–350	3/0–350	3/0–350	1/0–4/0	2–3/0	–	–	–	–
7624-T-110-3-RJS	110	0.92–1.18 (23,4–30,0)	400–500	400–500	400–500	400–500	250–350	4/0–350	–	–	–	–
7625-T-110-3-RJS	110	1.18–1.52 (30,0–38,6)	700–1000	700–1000	700–1000	700–1000	500–750	500–750	–	–	–	–
7624-T-125-3-RJS	125	0.92–1.18 (23,4–30,0)	400–500	400–500	400–500	400–500	250–350	4/0–350	–	–	–	–
7625-T-125-3-RJS	125	1.18–1.52 (30,0–38,6)	700–1000	700–1000	700–1000	700–1000	500–750	500–750	–	–	–	–
7693-T-150-3-RJS	150	0.70–0.92 (17,8–23,4)	4/0–350	3/0–350	3/0–350	3/0–350	1/0–4/0	2–3/0	1–1/0	–	–	–
7694-T-150-3-RJS	150	0.92–1.18 (23,4–30,0)	400–500	400–500	400–500	400–500	250–350	4/0–350	2/0–250	1–4/0	1–3/0	–
7695-T-150-3-RJS	150	1.18–1.52 (30,0–38,6)	700–1000	700–1000	700–1000	700–1000	500–750	500–750	350–500	250–500	4/0–500	1/0–350
7696-T-150-3-RJS	150	1.53–1.81 (38,8–46,0)	–	–	–	–	–	1000	750	500–750	500–750	350–750


Final determining factor is cable insulation diameter. Listed insulation ranges allow + 0,10" (2,54 mm) for shielding.
150 kV impulse level meets the impulse requirements for 35 kV class equipment where indoor terminations are used.

**Installation
Techniques**

 Caution
Working around energized electrical systems may cause serious injury or death. Installation should be performed by personnel familiar with good safety practice in handling high-voltage electrical equipment. De-energize and ground all electrical systems before installing product.


Detailed instructions are included in the 3M™ Cold Shrink QT-III Silicone Rubber Three Conductor Cable Termination Kit, 7600-3-RJS Series to provide the installer with all information required to properly install the appropriately sized termination product. A brief summary of the installation steps for tape-shielded cable is outlined below:

1. Remove cable jacket and armor layers.

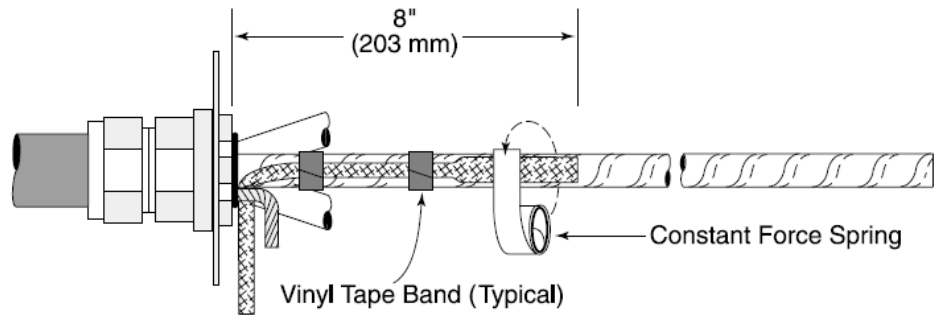

2. Fold outer silicone tubing back on itself for 1" (25 mm) and trim off exposed polyester braid.

NOTE: Do not damage silicone tubing while cutting. Sleeve assembly may be rotated to ease trimming. When doing so, rotate in the direction of the cable copper tape shield wrap.

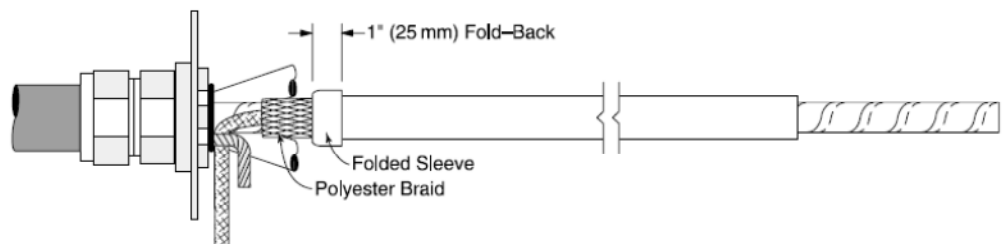


3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS

Installation Techniques (Continued)


- Slide re-jacketing sleeve assembly into desired final position. Pull folded sleeve section down onto cable phase shielding.

NOTE: Re-jacketing sleeve upper end should now align with upper edge of previously-installed marker tape (② Figure below).

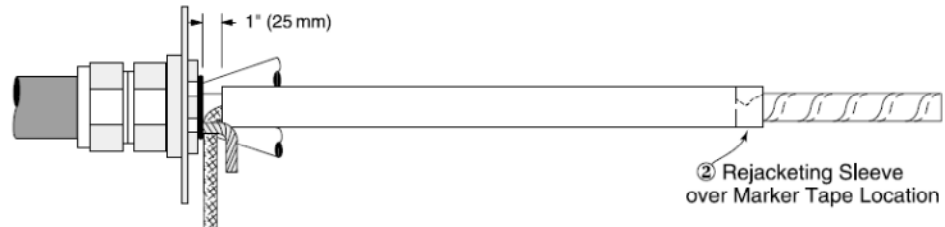

- After preparing cable phase leg ends, install QT-III termination assemblies by removing inner plastic supporting cores.

NOTE: The Material being removed at this step is mixed polymers and can be recycled with ♻️ waste.

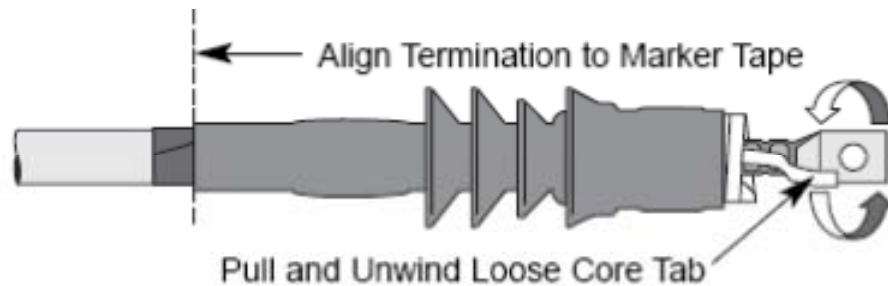

3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS

Performance Tests

Typical Results, IEEE Standard 48 Short-Term Test Sequence

Insulation Class Test	5 kV		8 kV		15 kV		25/28 kV		35 kV	
	Requirements	Results	Requirements	Results	Requirements	Results	Requirements	Results	Requirements	Results
Partial Discharge Extinction Voltage @ 3 pC	4.5 kV	Passed	7.5 kV	Passed	13 kV	Passed	21.5 kV	Passed	30 kV	Passed
Power Frequency Voltage 1 min. Dry Withstand	25 kV	Passed	35 kV	Passed	50 kV	Passed	65 kV	Passed	90 kV	Passed
Power Frequency Voltage 6 hr. Dry Withstand	15 kV	Passed	25 kV	Passed	35 kV	Passed	60 kV	Passed	76 kV	Passed
Direct Voltage 15 min. Dry Withstand	50 kV	Passed	65 kV	Passed	75 kV	Passed	105 kV	Passed	140 kV	Passed
Lightning Impulse Voltage Withstand (BIL)	75 kV	Passed	95 kV	Passed	110 kV	Passed	150 kV	Passed	200 kV	Passed
Partial Discharge Extinction Voltage @ 3 pC	4.5 kV	Passed	7.5 kV	Passed	13 kV	Passed	21.5 kV	Passed	30 kV	Passed

Typical Results, IEEE Standard 48 Long-Term Test Sequence

Insulation Class Test	5 kV		8 kV		15 kV		25/28 kV		35 kV	
	Requirements	Results	Requirements	Results	Requirements	Results	Requirements	Results	Requirements	Results
Partial Discharge Extinction Voltage @ 3 pC	4.5 kV	Passed	7.5 kV	Passed	13 kV	Passed	21.5 kV	Passed	30 kV	Passed
Cycling Aging 30 days, 130°C cond. temp Power Frequency Voltage Withstand	9 kV	Passed	15 kV	Passed	26 kV	Passed	43 kV	Passed	60 kV	Passed
Partial Discharge Extinction Voltage @ 3 pC	4.5 kV	Passed	7.5 kV	Passed	13 kV	Passed	21.5 kV	Passed	30 kV	Passed
Lightning Impulse Voltage Withstand (BIL)	75 kV	Passed	95 kV	Passed	110 kV	Passed	150 kV	Passed	200 kV	Passed

Critical Performance characteristics for 3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kit , 7600-3-RJS Series, includes resistance to damage from impulse flashover and from tracking during long-term exposure to severe environmental conditions.

Impulse Flashover 3M Test Method – Maximum Impulse

The purpose of this test method is to establish both the maximum impulse withstand level and the 100% impulse flashover level (on both positive and negative polarity) for high voltage terminations.

A 1.2 x 50 microsecond voltage wave is applied to the termination lugs as per IEEE Standard 48. Additional test standard references and procedures include those of IEEE Standard 4, IEEE Standard Test Procedures and Requirements for Alternating Current Cable Terminations 2.5 kV Through 765 kV and IEEE Standard 82, IEEE Standard Test Procedure for Impulse Voltage Tests on Insulated Conductors.

To establish the insulating performance suitability of 3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS Series, phase re-jacketing sleeve components, 15 kV Class termination samples were built in two configurations: those with an exposed grounding ring at the termination base (control) and those without. All specimens exceeded the IEEE Standard 48 BIL requirement by 50% during this test. Increasing the impulse voltage to termination flashover level resulted in no damage to the termination phase insulating re-jacketing components.

Alternating Current (AC) Flashover Test 3M Test Method – AC Step Test

The purpose of this test method is to establish the highest AC voltage that a termination can withstand, and is used to determine if a termination will meet the minimum performance requirements outlined in IEEE Standard 48.

Terminations are exposed to a stepped AC voltage rise to failure or flashover. The voltage magnitude required to arc across the termination surface in air (from terminal lug to ground point) is determined.

Individual 3/C 15 kV Class Termination phases that were tested with and without exposed termination body grounding rings achieved test levels associated with 25 kV Class products during this evaluation. Termination phase re-jacketing sleeves were not damaged at flashover level.

Contamination Chamber 3M Test Methods TM-402/ASTM 2132 Contaminant

Terminations are coated with a slurry consisting of flint, clay, paper pulp, salt and water and allowed to dry. They are then placed in the test chamber where they are energized at 1.5 times rated voltage and exposed to a continuous water mist spray from a rotating nozzle. Individual terminations are re-coated every 300 hours.

Because of the salt content and other solid particulate, this procedure is thought to be representative of industrial-seacoast location exposures.

To determine the tracking performance capability of 7600-RJS Series re-jacketing sleeves, 15 kV Class termination specimens were built with grounding rings located over the re-jacketing sleeves; eight and sixteen inches below the termination bodies respectively.

Specimens exceeded 2500 hours under these test conditions. This duration equals, or exceeds, the typical performance of 1/C conventionally grounded terminations. There were no signs of re-jacketing sleeve material degradation or tracking at the conclusion of the test.

3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS

Dielectric Test Performance

7600-RJS Series termination kits are designed to conform to applicable international standards (IEEE-48, CENELEC HD 629.1 S1 and VDE 0278). From extensive performance testing in single phase configuration, it has been established that these terminations meet, or exceed, the test requirements defined in these standards.

QT-III terminations pass pressure leak tests as described in Standard IEEE-48 in the single conductor configuration and all 7600-RJS Series 3/C termination components have demonstrated the ability to provide a good moisture seal. Termination top and bottom seals are tested by applying 7psi (0,05mPa) to cable conductor strands with the termination submerged in water. Both seals withstand this internal air pressure for 6 hours without leaking.

Product Specifications

The 3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kit, 7600-3-RJS Series cable terminations design must conform to all internationally recognized termination performance standards; specifically to VDE 0278, CENELEC HD 629.1 S1 and the Class 1 designation of IEEE-48. 7600-3-RJS Terminations shall be made from dark gray track-resistant silicone rubber. Each component (breakout boot, phase insulators and termination body) shall be supplied in the form of a one-piece assembly for hand application. Installation shall require no flame, heat source or specialized tools. The finished termination shall conform to all applicable cable industry bend radius standards. The termination kit shall include all materials required (except lug) and shall accommodate shielded cables. The class 1 termination kit shall be used with listed copper or aluminum compression lugs.

Maintenance

It is a good practice to incorporate a general inspection/cleaning of 3M™ Cold Shrink QT-III Silicone Rubber Terminations during normal scheduled or maintenance inspections. Once the area has been de-energized, the terminations can be inspected, and if need be, cleaned. Some recommendations for surface cleaning 3M™ Cold Shrink QT-III Silicone Rubber Terminations are as follows;

- Use a can of compressed 'air' in order to blast off dust and miscellaneous airborne contaminants on the surface of the termination body. If needed, wipe the surface of the termination with a cable cleaning solvent, such as 3M™ CC Series Cable Cleaning Solvent (Cable Cleaning Preparation Kit CC-2 or Cable Cleaning Pad Kit CC-3), and allow it to dry before re-energizing the installation.
- Mix a mild soap and water solution (deionized water is recommended, if available) in a hand sprayer, or spray bottle, and spray down the surface of the termination. Wipe dry, or allow to air dry, before re-energizing.
- If tan discoloration between skirts is observed on the surface of the termination, wipe with a cable cleaning solvent. The discoloration itself does not pose any detrimental effect to the installation, and may not disappear entirely, but it will lighten up to some degree. This discoloration a typical result of the outgassing effect of EPR cable and does not interfere with the performance of the termination in any capacity.

Do not abrade the surface or the termination in any way. Do not use high pressure cleaning (this can tear, or split, the termination), high pressure water with corn cobs, sandpaper or other abrasive products. This will damage the termination surface and reduce tracking and arcing resistance.

3M™ Cold Shrink QT-III Silicone Rubber Three-Conductor Cable Termination Kits, 7600-3-RJS

Engineering/ Architectural Specifications

Terminate all three-conductor 3 kV through 35 kV Class shielded power cables in accordance with the instructions provided in 7600-3-RJS Series Kit. The termination kits shall be used in conjunction with 3M™ Scotchlok™ Copper Compression Lugs, 30000 and 31000 Series, 3M™ Scotchlok™ Copper/Aluminum Compression Lugs, 40000 Series or 3M™ Stem Connector SC Series.

Shelf Life & Storage

As provided, in the expanded state, the 3M™ Cold Shrink QT-III Silicone Rubber Termination Kits 7600-3-RJS Series have a 3 year shelf life from date of manufacture when stored in humidity controlled storage (50°F/10°C to 80°F/27°C and <75% relative humidity).

Availability

Please contact your local distributor; available from 3M.com/electrical [Where to Buy (Find A Distributor)] or call 1-800-245-3573.


IMPORTANT NOTICE

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product, which are not contained in 3M's current publications, or any contrary statements contained on your purchase order, shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M

Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture at the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**

3M and Scotchlok are trademarks of 3M Company.

Note: The core material being removed from the termination, and other Cold Shrink items, are mixed polymers and can be recycled with  waste.



Electrical Markets Division
6801 River Place Blvd.
Austin, TX 78726-9000
800.245.3573
FAX: 800.245.0329
www.3M.com/electrical

Please recycle
© 3M 2013 All rights reserved
78-8127-7000-2 Rev C