

**Power
Defense™**


**Circuit Breaker
Accessory**

**For PDG1
Frame**

IL012165EN H02

**PDG1 Box Terminal (Steel) 125 amps,
AWG 14-3/0, 2 poles**
Cat. no. PDG1X2T125
Style no. 66A3613G16
Quantity - 2

Instructions for assembling collar
to circuit breaker

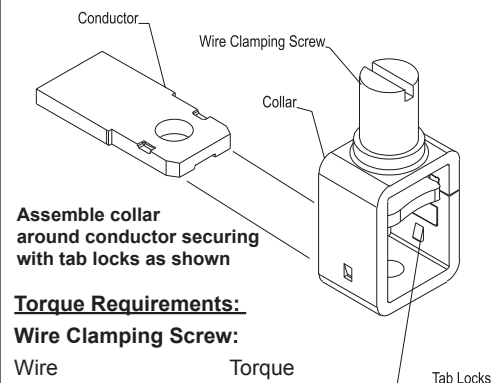


Assemble collar
around conductor securing
with tab locks as shown

Torque Requirements:

Wire Clamping Screw:

Wire AWG	(mm ²)	Torque Lb-In	(N-m)
14-10	(2.5-6)	35	(4.0)
8	(10)	40	(4.5)
6-4	(16-25)	45	(5.1)
3-3/0	(35-95)	50	(5.6)



786689164898

**Power
Defense™**


**Circuit Breaker
Accessory**

**For PDG1
Frame**

IL012165EN H02

**PDG1 Box Terminal (Steel) 125 amps,
AWG 14-3/0, 2 poles**
Cat. no. PDG1X2T125
Style no. 66A3613G16
Quantity - 2

Instructions for assembling collar
to circuit breaker

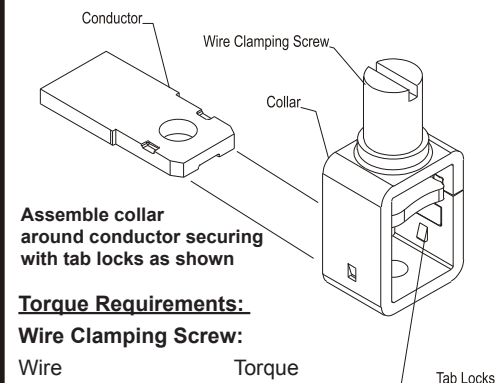

Assemble collar
around conductor securing
with tab locks as shown

Torque Requirements:

Wire Clamping Screw:

Wire AWG	(mm ²)	Torque Lb-In	(N-m)
14-10	(2.5-6)	35	(4.0)
8	(10)	40	(4.5)
6-4	(16-25)	45	(5.1)
3-3/0	(35-95)	50	(5.6)



786689164898

**Power
Defense™**


**Circuit Breaker
Accessory**

**For PDG1
Frame**

IL012165EN H02

**PDG1 Box Terminal (Steel) 125 amps,
AWG 14-3/0, 2 poles**
Cat. no. PDG1X2T125
Style no. 66A3613G16
Quantity - 2

Instructions for assembling collar
to circuit breaker

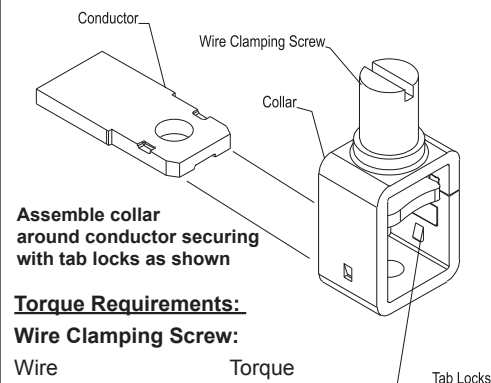


Assemble collar
around conductor securing
with tab locks as shown

Torque Requirements:

Wire Clamping Screw:

Wire AWG	(mm ²)	Torque Lb-In	(N-m)
14-10	(2.5-6)	35	(4.0)
8	(10)	40	(4.5)
6-4	(16-25)	45	(5.1)
3-3/0	(35-95)	50	(5.6)



786689164898

**Power
Defense™**


**Circuit Breaker
Accessory**

**For PDG1
Frame**

IL012165EN H02

**PDG1 Box Terminal (Steel) 125 amps,
AWG 14-3/0, 2 poles**
Cat. no. PDG1X2T125
Style no. 66A3613G16
Quantity - 2

Instructions for assembling collar
to circuit breaker

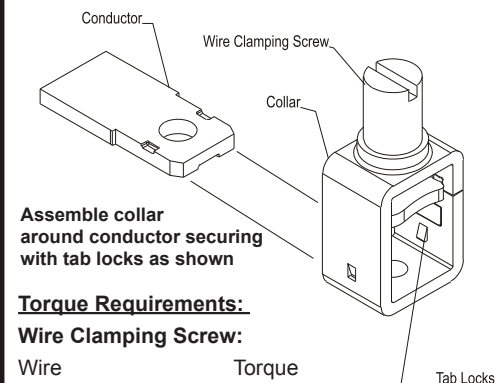

Assemble collar
around conductor securing
with tab locks as shown

Torque Requirements:

Wire Clamping Screw:

Wire AWG	(mm ²)	Torque Lb-In	(N-m)
14-10	(2.5-6)	35	(4.0)
8	(10)	40	(4.5)
6-4	(16-25)	45	(5.1)
3-3/0	(35-95)	50	(5.6)



786689164898