



Two
Collections.
Infinite
Possibilities.

DESIGNER SWITCHES & OUTLETS
from the **adorne®** and **radiant®** Collections

 **legrand®**



Elevate your space with exceptional style & innovative functionality.

Designer switches and outlets deliver advanced features to enhance everyday life while perfectly complementing any décor. Available in two distinct collections — adorne® and radiant® — and continuing a legacy of superb performance, these switches and outlets combine unmatched style with inventive technologies to offer comfort, safety and convenience.

From switches you wave on and self-calibrating universal dimmers, to industry-leading charging speeds and ultra-reliable smart lighting, this is where form and function intertwine.

For an accessible luxury that transforms how any room both looks and feels, explore designer switches and outlets.



TABLE OF CONTENTS

04 **Designer Switches & Outlets**

04 • Overview & Inspiration

07 **The adorne® Collection**

08 • Featured Categories

16 • adorne Dimmers & Switches

20 • adorne Outlets & USB Charging

26 • adorne Smart Lighting

28 • adorne Connectivity Accessories

32 • adorne Wall Plates

44 • adorne Under-Cabinet Lighting & Power System

53 **The radiant® Collection**

54 • Featured Categories

64 • radiant Dimmers & Switches

69 • radiant Outlets & USB Charging Solutions

76 • radiant Smart Lighting

79 • radiant Wall Plates

80 **Product Index**

80 • adorne Dimensions

81 • Index by Part Number

Two Collections. Infinite Possibilities.

The adorne and radiant Collections offer solutions to fit any need, in colors and finishes to match every taste — whether it means blending seamlessly into a room that's traditional and timeless, or adding an attention-grabbing accent to a more contemporary space.

Find your perfect finishing touch with designer switches and outlets.



The adorne Collection. Bold and beautiful, in the signature square. Select from adorne switches, dimmers and outlets in graphite, magnesium and white finishes, then pair them with dazzling screwless wall plates available in on-trend colors, finishes and materials.



The radiant Collection. Clean lines and classic colors, for a sophisticated touch. Give your space a “little something extra” with this elegant upgrade to a standard rectangular device. Switches, dimmers, outlets and wall plates available in nine finishes to easily coordinate with popular paint and hardware trends.



the
adorne[®]
collection

Dimmers & Switches



PADDLE SWITCH | ASPD1532W4

Upgrade from a standard switch. Turn lights on/off with easy up-or-down action.

PADDLE FAN SPEED CONTROL | AAFN4S16AW4

Adjust fan speed with modern style.

WHISPER DIMMER | ADWR703HW4

Turn lights on/off with a fluid, gentle action. Or use the slider to adjust light level.



SOFTAP TRU-UNIVERSAL DIMMER | ADTP703TUW4

The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V). Turn lights on/off with a light push action.

TOUCH SWITCH | ASTH1532W2

Turn lights on/off with just a simple touch.

WAVE SWITCH | ASWV1532W2

Go germ-free. Turn lights on/off with a wave.

Outlets and Night Lights



TAMPER-RESISTANT OUTLET | ARTR152W4

Upgrade from a standard outlet with discreet tamper-resistance.

ENERGY-SAVING ON/OFF OUTLET | ARPS152W4

Add style, while reducing energy waste. Outlet can be shut off when not in use to avoid pulling power in standby mode.

TAMPER-RESISTANT SELF-TEST

GFCI OUTLET | AGFTR2152W4

Get superior safety and superior style. Protects against electrical shock caused by ground-faults.



POP-OUT OUTLET | ARPTR151GW2

Pop it out to fit up-to-3 plugs simultaneously, then gently push back into the wall when not in use.

NIGHT LIGHT | AANLM24

Add built-in illumination for easier nighttime navigation.

PORTABLE NIGHT LIGHT/FLASHLIGHT | AARNL2

An in-wall night light that can be popped out for use as a flashlight.

USB Charging Solutions



USB OUTLET MODULE, HALF-SIZE | ARUSBW4
Combine with another adorne outlet or switch to add convenient USB charging within a 1-Gang+ Wall Plate.

DUAL USB OUTLET, PLUS-SIZE | ARTRUSB153W4
Charge two devices simultaneously, without sacrificing a plug or needing a bulky adapter.

ULTRA-FAST USB TYPE-A/C OUTLET MODULE | ARUSB2AC6W4
Get faster USB charging with this module featuring both USB Type-A and Type-C ports.




TAMPER-RESISTANT ULTRA-FAST USB TYPE-A/C OUTLET, PLUS-SIZE | ARTRUSB156ACW4
Charge your phone or tablets faster with an industry-leading 6 amps of power, without sacrificing a plug or needing a bulky adapter.

TAMPER-RESISTANT ULTRA-FAST PLUS POWER DELIVERY USB TYPE-C/C OUTLET, PLUS-SIZE | ARTRUSB15PD30W4
Maximize charging speeds (up to 2x faster) with ultra-fast amperage and advanced Power Delivery.

Smart Lighting



adorne® WITH Netatmo

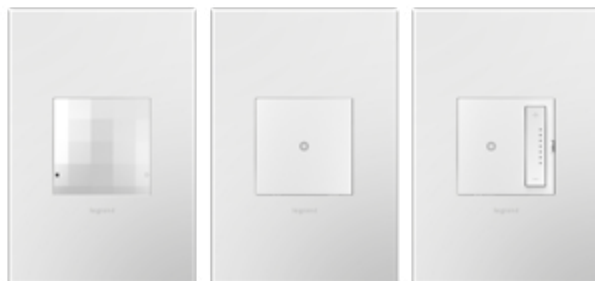

SMART GATEWAY WITH NETATMO | WNAH1W1


Start here to create a robust, dedicated network for advanced smart control throughout an entire home. Required for all Netatmo smart lighting solutions.

SMART SWITCH WITH NETATMO | WNAL10W1

Get advanced control of your lights from any smart device, from anywhere. Plug-in version also available.

SMART TRU-UNIVERSAL DIMMER WITH NETATMO | WNAL50W1

The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable lighting types and loads (except 0-10V). Plug-in version also available.

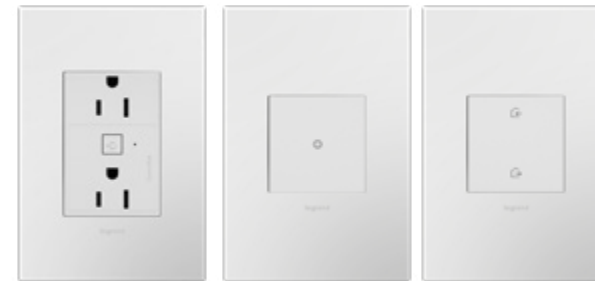

SMART OUTLET, PLUS-SIZE WITH NETATMO | WNAR153W1

Get advanced control of power from any smart device, from anywhere. One outlet is app-controlled, the other is always on. 15A and 20A versions available.

WIRELESS SMART SWITCH WITH NETATMO | WNAL23W1

Add to any wall or surface for easy 3-way control. Battery-operated; no wiring required. Dimmer also available.

HOME/AWAY WIRELESS SMART SWITCH WITH NETATMO | WNAL33W1

Add to any wall or surface for one tap control of a full lighting scene. Battery-operated; no wiring required.

Paddle™

The Paddle design features a simple up-or-down action, allowing you to turn lights on and off with ease. Dimmers include a slider for dimming or brightening lights.

Pair with a Locator Status Light to add illumination to your Paddle switch or dimmer. See page 25.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
	ASPD1532W4 ASPD1532M4 ASPD1532G4	Usable in single-pole or 3-way applications.	White Magnesium Graphite	15A, 120 VAC	All Loads	 , RoHS
	ASPD2032W4 ASPD2032M4 ASPD2032G4		White Magnesium Graphite	20A, 120 VAC	All Loads	 , RoHS
	ASPD1532W277 ASPD1532M277 ASPD1532G277		White Magnesium Graphite	15A, 277 VAC	All Loads	 , RoHS
	ASPD2042W4 ASPD2042M4 ASPD2042G4	4-way switch also available. Must be paired with two 3-way switches.	White Magnesium Graphite	20A, 120 VAC	All Loads	 , RoHS
	ADPD453LW2 ADPD453LM2 ADPD453LG2	Usable in single-pole or 3-way applications.	White Magnesium Graphite	450W	CFL, LED	 , RoHS
	ADPD703HW4 ADPD703HM4		White Magnesium	25W - 700W	Incandescent, Halogen	 , RoHS
	ADPD1103HW4 ADPD1103HM2 ADPD703HG4	Usable in single-pole or 3-way applications. 2-Wire	White Magnesium Graphite	25W - 1100W	Incandescent, Halogen	 , RoHS
	ADPD4FBL3P2W4 ADPD4FBL3P2M4 ADPD4FBL3P2G4	Usable in single-pole or 3-way applications.	White Magnesium Graphite	0-10V	0-10V Light Fixtures	 , RoHS
	ASPD1531W4 ASPD1531M4 ASPD1531G4	Usable in single-pole or 3-way applications.	White Magnesium Graphite	15A, 120 VAC	All Loads	 , RoHS
	ASPD1531W277 ASPD1531M277 ASPD1531G277		White Magnesium Graphite	15A, 277 VAC	All Loads	 , RoHS
	AAFN4S16AW4 AAFN4S16AM4 AAFN4S16AG4	Features four speeds. Includes de-hummer.	White Magnesium Graphite	1.6A, 120 VAC	Paddle-Type Ceiling Fan	 , RoHS

Note: Due to manufacturer variations and modifications, we are unable to ensure indefinite dimming compatibility with any bulb or fixture.

Whisper™

The Whisper design features classic, elegant lines and a gentle action. Whisper dimmers include a slide for dimming or brightening lights.

Pair with a Locator Status Light to add illumination to your Whisper switch or dimmer. See page 25.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
	ASWR1532W4 ASWR1532M4 ASWR1532G4	Usable in single-pole or 3-way applications.	White Magnesium Graphite	15A, 120 VAC	All Loads	 , RoHS
	ADWR703HW4 ADWR703HM4	Usable in single-pole or 3-way applications. 2-Wire	White Magnesium	25W - 700W	Incandescent, Halogen	 , RoHS
	ADWR1103HW4 ADWR1103HM4	Usable in single-pole or 3-way applications. 2-Wire	White Magnesium	25W - 1100W	Incandescent, Halogen	 , RoHS
	ADWR703TUW4 ADWR703TUM4 ADWR703TUG4	The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V).	White Magnesium Graphite	6W - 700W	Incandescent, Halogen & ELV: 700W, MLV: 500VA, LED/CFL: 450W (not compatible with 0-10V LED drivers), EFL: 5.5A	 , RoHS

Push™

The Push Switch allows you to turn lights on and off with a simple push-button action. Pair with a Locator Status Light to add illumination to your Push switch. See page 25.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
	ASPU1532W4 ASPU1532M4	Usable in single-pole or 3-way applications.	White Magnesium	15A, 120 VAC	All Loads	 , RoHS

Wave™

The Wave switch features innovative technology combined with sleek, contemporary design. Simply wave your hand in front of the switch to turn lights on and off.

With its touch-free motion, the Wave is ideal for countertop areas in kitchens and bathrooms. It has a preset sensor distance of approximately 4". However, this can be easily adjusted to sense movement from 1" to 6" in front of switch.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
	ASWV1532W2 ASWV1532M2 ASWV1532G2	Usable in single-pole or 3-way applications.	White Magnesium Graphite	15A, 120 VAC, 1/2 Hp	All Loads	 , RoHS

Note: Due to manufacturer variations and modifications, we are unable to ensure indefinite dimming compatibility with any bulb or fixture.

sofTap™

The sofTap design features an innovative micro-movement that turns lights on and off with a lighter push action. Dimmers include a unique paddle to adjust light levels.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
sofTap Switch	ASTP1532W4 ASTP1532M4 ASTP1532G4	Usable in single-pole or 3-way applications.	White Magnesium Graphite	15A, 120 VAC, 1/2 Hp	All Loads	 , RoHS
sofTap Dimmer	ADTP703T UW4 ADTP703T UM4 ADTP703T UG4	The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V).	White Magnesium Graphite	6W - 700W	Incandescent, Halogen & ELV: 700W, MLV: 500VA, LED/CFL: 450W (not compatible with 0-10VLED drivers), EFL: 5.5A	 , RoHS
	ADTP703HW2 ADTP703HM2	Usable in single-pole or 3-way applications. 2-Wire	White Magnesium	700W	Incandescent, Halogen	 , RoHS
	ADTP1103HW4 ADTP1103HM4	Usable in single-pole or 3-way applications. 2-Wire	White Magnesium	1100W	Incandescent, Halogen	 , RoHS
	ADTP4FBL3PW4 ADTP4FBL3PM4 ADTP4FBL3PG4	Usable in single-pole or 3-way applications.	White Magnesium Graphite	0-10V	0-10V Light Fixtures	 , RoHS

Touch™

The Touch design features a stunning translucent face and operates just like a smartphone - simply touch your finger on the circle to turn lights on and off, or use the arrows on the right to dim them (Touch dimmer only).

The white Touch interface is created using a unique translucent material. In multi-gang installations, we recommend pairing with white Touch switches and dimmers for optimal consistency.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Touch Switch	ASTH1532W2 ASTH1532M2 ASTH1532G2	Usable in single-pole or 3-way applications.	White Magnesium Graphite	15A, 120 VAC, 1/2 Hp	All Loads	 , RoHS
Touch Dimmer	ADTH703T UM4 ADTH703T UW4 ADTH703T UG4	The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V).	White Magnesium Graphite	6W - 700W	Incandescent, Halogen & ELV: 700W, MLV: 500VA, LED/CFL: 450W (not compatible with 0-10V LED drivers), EFL: 5.5A	 , RoHS
	ADTH4FBL3PW4 ADTH4FBL3PM4 ADTH4FBL3PG4	Usable in single-pole or 3-way applications.	White Magnesium Graphite	0-10V	0-10V Light Fixtures	 , RoHS


Note: Due to manufacturer variations and modifications, we are unable to ensure indefinite dimming compatibility with any bulb or fixture.

SensaSwitch™ + SensaDimmer™

SensaSwitches include passive infrared (PIR) sensor technology, automatically turning lights on or off when you enter or leave a room. The design features an innovative micro-movement that allows you to also manually turn on lights with a soft touch of the finger. SensaSwitches are available in three models:

- Auto-ON/Auto-OFF: Automatically turns lights on when you enter a room and off when you leave. (Occupancy Sensor)
- Manual-ON/Auto-OFF: Allows you to turn lights on when you enter a room and automatically turns them off when you leave. (Vacancy Sensor)
- Manual-ON/Timed-OFF: Allows you to turn lights on when you enter a room and select a time for lights to turn off (options include 10, 20, 30, and 60 minutes). (Timer)

SensaSwitches are perfect for kitchens, bathrooms, garages and pantries. The SensaDimmer turns lights on when you enter a room and off when you leave, but can be adjusted to become Manual-ON/Auto-OFF if desired. The chart to the right provides an overview of the sensor coverage area.

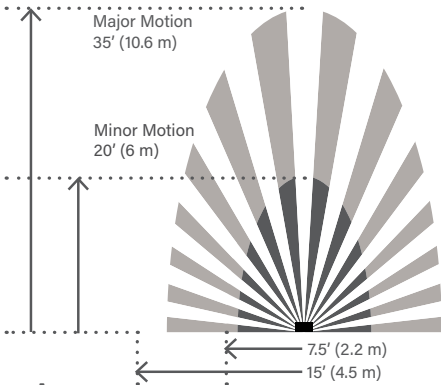

Coverage Area
The Occupancy Sensor, Vacancy Sensor, and SensaDimmer each have a maximum coverage range of 180 degrees and a coverage area of 600 sq. ft. The sensor must have a clear and unobstructed view of the coverage area. Objects blocking the sensor's lens may prevent detection thereby causing the light to turn off even though someone is in the area. Windows, glass doors, and other transparent barriers will obstruct the sensor's view and prevent detection.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
SensaSwitch, Auto-ON/ Auto-OFF	ASOS32W4 ASOS32M4 ASOS32G4	Usable in single-pole or 3-way applications.	White Magnesium Graphite	600W, 120VAC, 60 Hz, 1/6 Hp	All Loads	 , RoHS
		Time delay of 5-30 min. Occupancy Sensor (Must be paired with another SensaSwitch or SensaDimmer in 3-way applications)				
SensaSwitch, Manual- ON/Auto-OFF	ASVS12W4 ASVS12M4 ASVS12G4	Usable in single-pole or 3-way applications.	White Magnesium Graphite	600W, 120VAC, 60 Hz, 1/6 Hp	All Loads	 , RoHS CA Title 24
		Time delay of 5-30 min. Vacancy Sensor (Must be paired with another SensaSwitch or SensaDimmer in 3-way applications)				
SensaSwitch, Manual- ON/Timed-OFF	ASTM2W2 ASTM2M2 ASTM2G2	Usable in single-pole or 3-way applications.	White Magnesium Graphite	600W, 120VAC, 60 Hz, 1/6 Hp	All Loads	 , RoHS
		Time delay options include 10, 20, 30 or 60 min. Manual ON/Timed OFF Switch (Must be paired with another SensaSwitch/ or SensaDimmer)				
SensaDimmer, Auto-ON/ Auto-OFF	ADSM703HW2 ADSM703HM2 ADSM703HG2	Usable in single-pole or 3-way applications.	White Magnesium Graphite	25W - 700W	Incandescent, Halogen	 , RoHS
		Time delay of 5-30 min. Dimming Occupancy Sensor 3-Wire (Must be paired with another SensaSwitch)		25W - 450W		

Outlets

Outlets from the adore Collection feature a tamper-resistant design, complete with a patented black invis-shutter system to prevent the insertion of foreign objects while blending into the outlet. All adore 15A outlets have a 20A feed or pass-through, allowing them to be installed on 20A circuits.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Tamper-Resistant Outlet 	ARTR152W4 ARTR152M4 ARTR152G4	Pair with a Half-Size Night Light, Paddle Switch, or USB Outlet for greater functionality in a 1-Gang+ Wall Plate. 15A provides 20A pass-through.	White Magnesium Graphite	15A, 125V 	5-15R	 , RoHS
	ARTR202W4 ARTR202M4 ARTR202G4		White Magnesium Graphite	20A, 125V 	5-20R	
Tamper-Resistant Outlet, Plus-Size 	ARTR153W4 ARTR153M4 ARTR153G4	Compatible with 1-Gang+ Wall Plates only. Cannot be used in multi-gang installations. Provides 20A pass-through.	White Magnesium Graphite	15A, 125V 	5-15R	 , RoHS
Tamper-Resistant Self-Test GFCI Outlet 	AGFTR2152W4 AGFTR2152M4 AGFTR2152G4	GFCIs protect against serious injury due to electric shock. They are required by National Electrical Code in kitchens and bathrooms. All adore GFCIs are self testing to meet the latest NEC requirement. 15A provides 20A pass-through.	White Magnesium Graphite	15A, 125V 	5-15R	 , RoHS
	AGFTR2202W4 AGFTR2202M4 AGFTR2202G4		White Magnesium Graphite	20A, 125V 	5-20R	
Tamper-Resistant Self-Test GFCI Outlet, Plus-Size 	AGFTR2153W4 AGFTR2153M4 AGFTR2153G4	GFCIs protect against serious injury due to electric shock. They are required in kitchens and bathrooms. All adore GFCIs are self testing to meet the latest NEC requirement. Provides 20A pass-through. Compatible with 1-Gang+ Wall Plates only. Cannot be used in multi-gang installations.	White Magnesium Graphite	15A, 125V 	5-15R	 , RoHS
Energy-Saving ON/OFF Outlet 	ARPS152W4 ARPS152M4 ARPS152G4	On/off switch allows you to save energy and stop the flow of power without unplugging your device. Perfect for kitchens, bathrooms, and computer rooms. Provides 20A pass-through.	White Magnesium Graphite	15A, 125V 	5-15R	 , RoHS
Tamper-Resistant Dual Controlled Outlet 	ARCD152W10 ARCD152M10 ARCD152G10	This Plug Load outlet controls both receptacles, which will turn off for energy efficiency and cost savings. They are code-required, meet standards, and include permanent power markings. 15A provides 20A pass-through.	White Magnesium Graphite	15A, 125V 	5-15R	 , RoHS
	ARCD202W10 ARCD202M10		White Magnesium	20A, 125V 	5-20R	
Tamper-Resistant Half Controlled Outlet 	ARCH152W10 ARCH152M10 ARCH152G10	This Plug Load outlet controls half the receptacle, featuring a factory-broken split-circuit tab, allowing half of the receptacle to turn off for energy efficiency and cost savings. They are code-required, meet standards, and include permanent power markings. Provides 20A pass-through.	White Magnesium Graphite	15A, 125V 	5-15R	 , RoHS

USB Charging

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
USB Outlet Module, Half-Size 	ARUSBW4 ARUSBM4 ARUSBG4	Perfect for charging mobile devices such as phones and tablets. Pair with a switch or outlet in a 1-Gang+ plate for more functionality in one box. Provides 20A pass-through.	White Magnesium Graphite	2.1A, 5 VDC, 11W 		 , RoHS
Dual USB Outlet, Plus-Size 	ARTRUSB153W4 ARTRUSB153M4 ARTRUSB153G4	Perfect for charging multiple mobile devices. Provides 20A pass-through. Compatible with 1-Gang+ Wall Plates only. Cannot be used in multi-gang installations. Available in two versions: standard (without wall plate) or with an included wall plate in matching finish.	White Magnesium Graphite	3.1A, 5V DC 15A, 125V 	5-15R for NEMA	 , RoHS
	ARTRUSB153W4WP ARTRUSB153M4MP		(WITH WALL PLATE) White Magnesium			
Ultra-Fast USB Type-A/A Outlet 	ARUSB2AA6W4 ARUSB2AA6M4 ARUSB2AA6G4	Charge phones, tablets and more, faster, with 2 USB connections pulling 6 amps of power.	White Magnesium Graphite	6A 		 , RoHS
Ultra-Fast USB Type-A/C Outlet 	ARUSB2AC6W4 ARUSB2AC6M4 ARUSB2AC6G4	Charges phones, tablets and more, faster, with 6 amps of power via USB Types-A and C connections.	White Magnesium Graphite	6A 		 , RoHS
Tamper-Resistant Ultra-Fast USB Type-A/C Outlet 	ARTRUSB156ACW4 ARTRUSB156ACM4 ARTRUSB156ACG4	Charges phones, tablets and more, faster, with 6 amps of power via USB Types-A and C connections. Compatible with 1-Gang+ Wall Plates only. Cannot be used in multi-gang installations.	White Magnesium Graphite	6A 15A, 125V 	5-15R for NEMA	 , RoHS
	ARTRUSB206ACW4 ARTRUSB206ACM4 ARTRUSB206ACG4		White Magnesium Graphite	6A 20A, 125V 	5-20R for NEMA	
Tamper-Resistant Ultra-Fast PLUS Power Delivery USB Type-C/C Outlet 	ARUSB30PDW4 ARUSB30PDM4 ARUSB30PDG4	Charge up to 2x faster with this module featuring two future-proof USB Type-C ports.	White Magnesium Graphite	6A 		 , RoHS
Tamper-Resistant Ultra-Fast PLUS Power Delivery USB Type-C/C Outlet 	ARTRUSB15PD30W4 ARTRUSB15PD30M4 ARTRUSB15PD30G4	Charges devices up to 2X faster by combining our ultra-fast amperage with advanced Power Delivery. Includes two future-proof USB Type-C ports. Compatible with 1-Gang+ Wall Plates only. Cannot be used in multi-gang installations.	White Magnesium Graphite	6A, 15A, 125V, TR 	5-15R for NEMA	 , RoHS
	ARTRUSB20PD30W4 ARTRUSB20PD30M4 ARTRUSB20PD30G4		White Magnesium Graphite	6A, 20A, 125V, TR 	5-20R for NEMA	



Pop-Out™ Outlet

Pop-Out Outlets require a special frame (included in package) and are not compatible with those used with adorne wall plates. **They require a deep box, such as Pass & Seymour SI22R, for installation or in a location that has a thick material like a kitchen backsplash, in a standard box.** Each 15A outlet includes capacity for three plugs.


NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Pop-Out Outlet, 1-Gang	ARPTR151GW2 ARPTR151GM2 ARPTR151GG2	Includes 1-gang frame for installation. Cannot be paired with other switches, dimmers, outlets, or accessories. 15A version provides 3 receptacles. 20A version provides 2 receptacles. Cannot be used in multi-gang installations.	White Magnesium Graphite	15A 	5-15R	, RoHS
	ARPTR201GW2 ARPTR201GM2 ARPTR201GG2		White Magnesium Graphite	20A 	5-20R	
Pop-Out Outlet, 2-Gang	ARPTR152GW2 ARPTR152GM2 ARPTR152GG2	Includes one Pop-Out Outlet and 2-gang frame for installation. Select this option to pair your Pop-Out Outlet with another adorne switch, dimmer, outlet, or accessory.	White Magnesium Graphite	15A 	5-15R	, RoHS



deQuorum™ Flip-Up Table Boxes

deQuorum Flip-Up Table Boxes provide flexibility in decor, communication connectivity options, and installation to meet specific functional and aesthetic needs. Flip-Up Table Boxes bring the modules above the work surface when in use for easy access. Available in a black powder coat or brushed stainless steel finish.
*For additional configurations, contact your local rep.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Field Wired Dequorum™ Single Flip Up Unit with USB	DQFF15UBK DQFF15UST	Unit includes one (1) 15A tamper resistant duplex receptacle with two (2) USB ports that provide 3.1A.	Black Stainless	15A, 125V	5-15R	, RoHS
Cord Ended Dequorum™ Single Flip Up Unit with USB	DQFP15UBK DQFP15UST	Unit includes one (1) 15A black tamper-resistant duplex receptacle with two (2) USB ports that provide 3.1A. Unit comes with a 6' (1.83m) cord. Comes with a black powder coat finish.	Black Stainless	15A, 125V	5-15R	, RoHS
Cord Ended Dequorum™ Single Flip Up Unit	DQFP15BK DQFP15ST	Unit includes one (1) 15A black tamper-resistant duplex receptacle. Unit comes with a 6' (1.83m) cord. Comes with a black powder coat finish.	Black Stainless	15A, 125V	5-15R	, RoHS



Furniture Power Centers

Furniture Power Centers offer endless design possibilities by allowing power and charging to be built directly into furniture. Available options can blend in seamlessly or add a beautiful accent to your furniture or space. Add power, charging and more directly into headboards, night stands or seating.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Furniture Power, Outlet and USB Port	AD1-RU-W AD1-RU-M	Easily add power and charging to furniture. 1 tamper-resistant outlet and 1 USB charging port in a magnesium finish. Wall plate sold separately. Comes standard with 8 foot cord with right angle plug.	White Magnesium	Receptacles: 15A 120Vac USB charging ports: 2.4A, 5Vdc each	5-15R	, RoHS
Furniture Power, Outlet and 2 USB Ports	AD2-2UR-W AD2-2UR-M	Easily add power and charging to furniture. 1 tamper-resistant outlet and 2 USB charging ports in a magnesium finish. Wall plate sold separately. Comes standard with 8 foot cord with right angle plug.	White Magnesium	Receptacles: 15A 120Vac USB charging ports: 2.4A, 5Vdc each	5-15R	, RoHS
Furniture Power, 2 Outlets and 2 USB Ports	AD3-R2UR-W AD3-R2UR-M	Easily add power and charging to furniture. 2 tamper-resistant outlets and 2 USB charging ports in a magnesium finish. Wall plate sold separately. Comes standard with 8 foot cord with right angle plug.	White Magnesium	Receptacles: 15A 120Vac USB charging ports: 2.4A, 5Vdc each	5-15R	, RoHS

Illumination Accessories

You’ve never seen a night light that hides itself so cleverly, yet responds so elegantly to a simple touch. Or one that can be lifted from its home on your wall to double as a carry-around flashlight. When it comes to brilliant solutions, adorne really shines. All night lights include ambient light level sensors. Each features a range of settings, including: Always Off, Low, Medium and High. If set to Low, Medium or High, the night light’s LED will only be visible when the ambient room is dark. To change the selected setting, simply push on the square in the upper right-hand corner of the night light.

NAME	PART NUMBER	DESCRIPTION	COMPLIANCE
Night Light, Half-Size 	AANLM14	Features a soft, glowing LED light. Pair with a switch or outlet in a 1-Gang, 3-Module Plate for added flexibility. Light levels include: Always Off Low Medium High	 , RoHS
Night Light 	AANLM24	Features a soft, glowing LED light. Light levels include: Always Off Low Medium High	 , RoHS
Portable Night Light/Flashlight 	AARNL2	Simply push on this innovative night light to remove it from the wall and use it as a flashlight. Device recharges while mounted in wall and operates for up to 10 hours during a power failure. Includes light level options listed above, as well as Flashlight Mode, which is activated only when device is removed from the wall.	 , RoHS



In-wall Night Light function



Press on Night Light to remove from wall



Portable flashlight function





Locator Status Light: Find Us in the Dark

NAME	PART NUMBER	DESCRIPTION	COMPLIANCE
Locator Status Light 	AALSL6 AALSL277 (277 VAC)	Add a stylish, small locator light to your Paddle, Whisper, or Push switch or dimmer and you’ll never again have to slide your hand across the wall trying to find that switch. The locator light is a standard feature of all other switches and dimmers. It can be disabled if desired. Locator light is on when the load is off and off when the load is on.	 , RoHS




OPTIONAL						
						
Paddle Optional Accessory	Whisper Optional Accessory	Push Optional Accessory	sofTap Standard Feature	SensaSwitch Standard Feature	Touch Standard Feature	Wave Standard Feature

adorne with Netatmo

Control lights and power, from anywhere, with the ultra-reliable smart lighting solution optimized for whole-home use. Works with Amazon Alexa, Google Home and Apple HomeKit. Compatible with radiant with Netatmo.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Smart Gateway with Netatmo 	WNAH1W1 WNAH1M1 WNAH1G1	Creates a robust and dedicated network as the foundation of an adorne with Netatmo smart lighting solution.	White Magnesium Graphite			 , RoHS
Smart Surface-Mount Gateway with Netatmo 	WNAH2W1 WNAH2M1 WNAH2G1	Creates a robust and dedicated network as the foundation of an adorne with Netatmo smart lighting solution. Installs beside an outlet or switch.	White Magnesium Graphite			 , RoHS
Smart Switch with Netatmo 	WNAL10W1 WNAL10M1 WNAL10G1	Control lights from anywhere. Gateway required.	White Magnesium Graphite	15A, 120V		 , RoHS
Smart Tru-Universal Dimmer with Netatmo 	WNAL50W1 WNAL50M1 WNAL50G1	The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V).	White Magnesium Graphite	15A, 120V	Incandescent, Halogen & ELV: 700W, MLV: 500VA, LED/CFL: 450W (not compatible with 0-10V LED drivers), EFL: 5.5A	 , RoHS
Wireless Smart Switch with Netatmo 	WNAL23W1 WNAL23M1 WNAL23G1	Can be added to any wall or surface for easy 3-way control, no wiring required. Must be paired with a Smart Switch with Netatmo. Battery-operated.	White Magnesium Graphite			 , RoHS
Wireless Smart Dimmer with Netatmo 	WNAL63W1 WNAL63M1 WNAL63G1	Can be added to any wall or surface for easy 3-way dimming control, no wiring required. Must be paired with a Smart Tru-Universal Dimmer with Netatmo. Battery-operated.	White Magnesium Graphite			 , RoHS
Home/Away Wireless Smart Switch with Netatmo 	WNAL33W1 WNAL33M1 WNAL33G1	Controls a scene of multiple lights, turning the lights on (or off), simultaneously, with just a single tap. Add to any wall or surface, no wiring required. Battery-operated.	White Magnesium Graphite			 , RoHS

Note: Due to manufacturer variations and modifications, we are unable to ensure indefinite dimming compatibility with any bulb or fixture.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Wake/Sleep Wireless Smart Switch with Netatmo 	WNAL43W1 WNAL43M1 WNAL43G1	Controls a scene of multiple lights, turning the lights on (or off), simultaneously, with just a single tap. Add to any wall or surface, no wiring required. Battery-operated.	White Magnesium Graphite			 , RoHS
Smart Outlet with Netatmo 	WNAR153W1 WNAR153M1 WNAR153G1 WNAR203W1 WNAR203M1 WNAR203G1	Control power from anywhere. One outlet is app-controlled, the other is always on. Gateway required.	White Magnesium Graphite White Magnesium Graphite	15A, 125V,  20A, 125V, 	5-15R 5-20R	 , RoHS
Smart Plug-In Switch with Netatmo 	WNP10	Plug into an existing outlet for smart control of lamps and small appliances, no installation required.	White			 , RoHS
Smart Plug-In Tru-Universal Dimmer with Netatmo 	WNP20	Plug into an existing outlet to gain smart dimming control. The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V).	White		Incandescent, Halogen & ELV: 700W, MLV: 500VA, LED/CFL: 450W (not compatible with 0-10V LED drivers), EFL: 5.5A	 , RoHS
Smart Switch Starter Kit with Netatmo 	WNAH10KITW1 WNAH10KITM1 WNAH10KITG1	Kit includes (1) Smart Switch with Netatmo, (1) Smart Surface-Mount Gateway with Netatmo, (1) Home/Away Wireless Smart Switch with Netatmo	White Magnesium Graphite	15A, 125V		 , RoHS
Smart Outlet Starter Kit with Netatmo 	WNAH15KITW1 WNAH15KITM1 WNAH15KITG1	Kit includes (1) 15A Smart Outlet with Netatmo, (1) Smart Surface-Mount Gateway with Netatmo, (1) Home/Away Wireless Smart Switch with Netatmo	White Magnesium Graphite	15A, 125V, 	5-15R	 , RoHS

Blank Module

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH
Half-Size Blank	AABK1W4 AABK1M4 AABK1G4	Use this blank insert to give your project a complete, finished look. Pair it with other half-size devices, like the Night Light, Paddle Switch or USB, in a 1-gang wall plate.	White Magnesium Graphite

Keystone Frames

For a consistent look throughout the project, select an adorne keystone frame to enable audio, video and data connectivity in an adorne wall plate. Simply pair a 1-port, 2-port or 4-port frame with any keystone inserts shown on the next page and then mount in an adorne wall plate for a complete installation.

NAME	PART NUMBER	COLOR/FINISH
1-Port Frame	AC1PFW1 AC1PFM1 AC1PFG1	White Magnesium Graphite
2-Port Frame	AC2PFW1 AC2PFM1 AC2PFG1	White Magnesium Graphite
4-Port Frame	AC4PFW1 AC4PFM1	White Magnesium
In-Wall Cable Access Port	ACBRSTPW1 ACBRSTPM1	White Magnesium




1-Port Frame



2-Port Frame



4-Port Frame




In-Wall Cable Access Port

Keystone Inserts


NAME	PART NUMBER	COLOR/FINISH
Cat 5e RJ45 Data/Phone Insert	AC5ERJ45W1 AC5ERJ45M1	White Magnesium
Cat 5e RJ45 Data Coupler Insert	AC5ERJ45CW1 AC5ERJ45CM1	White Magnesium
Cat 6 RJ45 Data Insert	AC6RJ45W1 AC6RJ45M1 AC6RJ45G1	White Magnesium Graphite
RJ25 Phone Jack	ACRJ25W1 ACRJ25M1	White Magnesium
Component Video RCA to F Kit	ACRGBRCAFW1 ACRGBRCAFM1	White Magnesium
Composite Video RCA to F-Connector	ACYRCAFW1 ACYRCAFM1	White Magnesium

NAME	PART NUMBER	COLOR/FINISH
HDMI Keystone Coupler	ACHDMIW1 ACHDMIM1	White Magnesium
Single Keystone Speaker Connector	ACSSIW1 ACSSIM1	White Magnesium
Speaker Binding Posts	ACABPW1 ACABPM1	White Magnesium
Subwoofer RCA to F-Connector	ACPRCAFW1 ACPRCAFM1	White Magnesium
Video F-Connector	ACNRFCW1 ACNRFCM1 ACNRFCG1	White Magnesium Graphite
Blank Keystone Insert (4-Pack)	ACBLKW4 ACBLKM4	White Magnesium

Modular Unit Dimensions

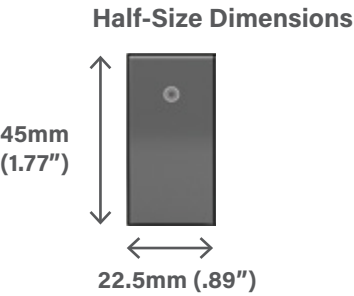

- The basic building block of the system is a half-size unit (45mm x 22.5mm).
- All devices have either half-size or full-size front faces.
- Devices can also have half-size, full-size or plus-size back bodies.

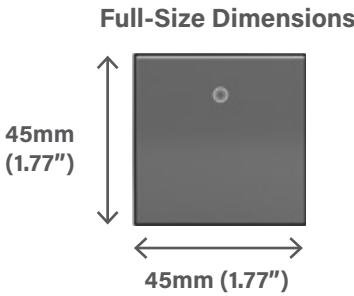

- Most switches, dimmers and outlets are in the full-size format (45mm x 45 mm). This is the standard adorne proprietary "45" opening.

Front Face and Back Body Modular Sizes

SWITCHES

NAME	FRONT FACE SIZE	BACK BODY SIZE
Paddle Switch, 2-Module	Full-Size	Full-Size
Paddle Switch, 1-Module	Half-Size	Half-Size
Whisper Switch	Full-Size	Full-Size
Push Switch	Full-Size	Full-Size
sofTap Switch	Full-Size	Plus-Size
SensaSwitch	Full-Size	Plus-Size
Touch	Full-Size	Plus-Size
Wave	Full-Size	Plus-Size

DIMMERS

NAME	FRONT FACE SIZE	BACK BODY SIZE
Paddle	Full-Size	Plus-Size
Whisper	Full-Size	Plus-Size
sofTap	Full-Size	Plus-Size
SensaDimmer	Full-Size	Plus-Size
Touch	Full-Size	Plus-Size
Paddle Fan Speed Control	Full-Size	Plus-Size

OUTLETS

NAME	FRONT FACE SIZE	BACK BODY SIZE
Tamper-Resistant Outlet, Full-Size	Full-Size	Full-Size
Tamper-Resistant Outlet, Plus-Size	Plus-Size	Plus-Size
GFCI Outlet, Full-Size	Full-Size	Plus-Size
GFCI Outlet, Plus-Size	Plus-Size	Plus-Size
Energy-Saving ON/OFF Outlet	Full-Size	Full-Size
USB Outlet	Half-Size	Half-Size

ILLUMINATION

NAME	FRONT FACE SIZE	BACK BODY SIZE
Night Light, Half-Size	Half-Size	Half-Size
Night Light, Full-Size	Full-Size	Full-Size
Portable Night Light/Flashlight	Full-Size	Plus-Size

Optional Configurations

1-Gang



1-Gang



1-Gang+




2-Gang



3-Gang



4-Gang

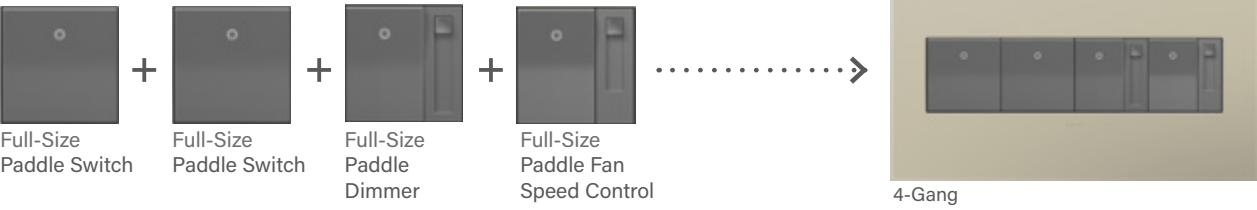

R REAL MATERIALS

CM CAST METALS

HF Hubbardton Forge[®]

P PLASTIC



R Black Stainless



R Brushed Stainless



R Custom with Magnesium Trim



R Custom with White Trim



R Macassar



R Mirror



R Mirror Black



R Mirror White



R Mirror White, White-on-White



R Slate Linen



R Spiraled Stainless



R Rustic Grey



R True Linen



CM Black Nickel



CM Brushed Black Nickel



CM Brushed Satin Brass



CM Brushed Stainless Steel



CM Coffee



CM Matte Antique Copper



CM Satin Black



CM Oil-Rubbed Bronze



CM Satin Nickel



P Bronze



P Natural Iron



P Black Ink



P Bronze



P Bleu Noir



P Carnival



P Graphite



P Gloss White



P Gloss White, White-on-White



P Golden Sands



P Greige



P Hibiscus



P Magnesium



P Pale Blue



P Powder White



P Satin Light Almond



P Titanium

REAL MATERIALS



MACASSAR | AWM1G2MA4


Real Materials

These adorne Wall Plates add unique beauty to any space with contemporary options like stainless and mirror, as well as natural materials like linen and wood.

NAME	GANGS	PART NUMBER
Black Stainless   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2BLS4 AWM1G3BLS4 AWM2GBLS4 AWM3GBLS4 AWM4GBLS4
Brushed Stainless   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2MS4 AWM1G3MS4 AWM2GMS4 AWM3GMS4 AWM4GMS4
Custom with Magnesium Trim   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2M4 AWM1G3M4 AWM2GM4 AWM3GM4 AWM4GM4
Custom with White Trim   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2W4 AWM1G3W4 AWM2GW4 AWM3GW4 AWM4GW4
Macassar   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2MA4 AWM1G3MA4 AWM2GMA4 AWM3GMA4 AWM4GMA4
Mirror   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2MR4 AWM1G3MR4 AWM2GMR4 AWM3GMR4 AWM4GMR4
Mirror Black   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2MB4 AWM1G3MB4 AWM2GMB4 AWM3GMB4 AWM4GMB4

NAME	GANGS	PART NUMBER
Mirror White   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2MW4 AWM1G3MW4 AWM2GMW4 AWM3GMW4 AWM4GMW4
Mirror White, White-on-White   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2MWW4 AWM1G3MWW4 AWM2GMWW4 AWM3GMWW4 AWM4GMWW4
Rustic Grey   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2RG4 AWM1G3RG4 AWM2GRG4 AWM3GRG4 AWM4GRG4
Slate Linen   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2SL4 AWM1G3SL4 AWM2GSL4 AWM3GSL4 AWM4GSL4
Spiraled Stainless   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2SP4 AWM1G3SP4 AWM2GSP4 AWM3GSP4 AWM4GSP4
True Linen   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2TL4 AWM1G3TL4 AWM2GTL4 AWM3GTL4 AWM4GTL4
Copper   	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2CU4 AWM1G3CU4 AWM2GCU4 AWM3GU4 AWM4GU4

CAST METALS

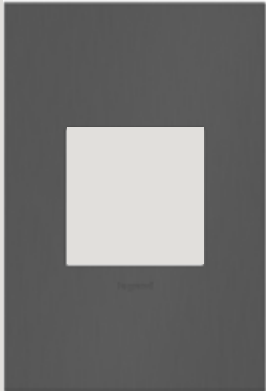

BRUSHED BLACK NICKEL | AWC1G2BBN4

Cast Metals

Cast metal Wall Plates from the adorne Collection are hand-crafted by artisans, making them unique and distinctive. These slight variations in finish and color add to the rich beauty of the adorne cast metal offering.

NAME	GANGS	PART NUMBER	NAME	GANGS	PART NUMBER
Black Nickel  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWC1G2BLN4 AWC1G3BLN4 AWC2GBLN4 AWC3GBLN4 AWC4GBLN4	Matte Antique Copper  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWC1G2MAC4 AWC1G3MAC4 AWC2GMAC4 AWC3GMAC4 AWC4GMAC4
Brushed Black Nickel  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWC1G2BBN4 AWC1G3BBN4 AWC2GBBN4 AWC3GBBN4 AWC4GBBN4	Satin Black  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWC1G2SBL4 AWC1G3SBL4 AWC2GSBL4 AWC3GSBL4 AWC4GSBL4
Brushed Satin Brass  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWC1G2BSB4 AWC1G3BSB4 AWC2GBSB4 AWC3GBSB4 AWC4GBSB4	Oil-Rubbed Bronze  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWC1G2OB4 AWC1G3OB4 AWC2GOB4 AWC3GOB4 AWC4GOB4
Brushed Stainless Steel  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWC1G2BS4 AWC1G3BS4 AWC2GBS4 AWC3GBS4 AWC4GBS4	Satin Nickel  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWC1G2SN4 AWC1G3SN4 AWC2GSN4 AWC3GSN4 AWC4GSN4
Coffee  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWC1G2COF4 AWC1G3COF4 AWC2GCOF4 AWC3GCOF4 AWC4GCOF4			

The Hubbardton Forge[®] Line

These lustrous metal plates, forged by fire, are a unique and exquisite addition to the adorne Collection. In partnering with Hubbardton Forge, we combine the passion of a 6,000-year-old art form with our cutting-edge technology for richly textured results.

NAME	GANGS	PART NUMBER	NAME	GANGS	PART NUMBER
Bronze  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2HFBR4 AWM1G3HFBR1 AWM2GHFBR1 AWM3GHFBR1 AWM4GHFBR1	Natural Iron  	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWM1G2HFFE4 AWM1G3HFFE1 AWM2GHFFE1 AWM3GHFFE1 AWM4GHFFE1

CLASSICS



GOLDEN SANDS | AWP1G2GS4

Plastics

Available in a variety of classic and contemporary colors, adorne plastic Wall Plates provide the perfect finishing touch to any installation.

NAME	GANGS	PART NUMBER
Black Ink	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2NK4 AWP1G3NK4 AWP2GNK4 AWP3GNK4 AWP4GNK4 AWP5GNK1 AWP6GNK1
Bronze	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2BR6 AWP1G3BR4 AWP2GBR4 AWP3GBR4 AWP4GBR4 AWP5GBR1 AWP6GBR1
Bleu Noir	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2BN4 AWP1G3BN4 AWP2GBN4 AWP3GBN4 AWP4GBN4 AWP5GBN1 AWP6GBN1
Carnival	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2CA4 AWP1G3CA4 AWP2GCA4 AWP3GCA4 AWP4GCA4 AWP5GCA1 AWP6GCA1
Graphite	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2GR6 AWP1G3GR4 AWP2GGR4 AWP3GGR4 AWP4GGR4 AWP5GGR1 AWP6GGR1
Magnesium	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2MG6 AWP1G3MG4 AWP2GMG4 AWP3GMG4 AWP4GMG4 AWP5GMG1 AWP6GMG1
Pale Blue	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2BL6 AWP1G3BL4 AWP2GBL4 AWP3GBL4 AWP4GBL4 AWP5GBL1 AWP6GBL1

NAME	GANGS	PART NUMBER
Gloss White, White-on-White	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2WHW10 AWP1G3WHW4 AWP2GWHW10 AWP3GWHW4 AWP4GWHW4 AWP5GWHW1 AWP6GWHW1
Gloss White	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2WH6 AWP1G3WH4 AWP2GWH4 AWP3GWH4 AWP4GWH4 AWP5GWH1 AWP6GWH1
Golden Sands	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2GS4 AWP1G3GS4 AWP2GGS4 AWP3GGS4 AWP4GGS4 AWP5GGS1 AWP6GGS1
Greige	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2GG4 AWP1G3GG4 AWP2GGG4 AWP3GGG4 AWP4GGG4 AWP5GGG1 AWP6GGG1
Hibiscus	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2HB4 AWP1G3HB4 AWP2GHB4 AWP3GHB4 AWP4GHB4 AWP5GHB1 AWP6GHB1
Powder White	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2PW4 AWP1G3PW4 AWP2GPW4 AWP3GPW4 AWP4GPW4 AWP5GPW1 AWP6GPW1
Satin Light Almond	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang	AWP1G2LA6 AWP1G3LA4 AWP2GLA4 AWP3GLA4 AWP4GLA4
Titanium	1-Gang 1-Gang+ 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	AWP1G2TM6 AWP1G3TM4 AWP2GTM4 AWP3GTM4 AWP4GTM4 AWP5GTM1 AWP6GTM1


The adorne Frame System

The frame is the foundation upon which the adorne modular system is built. It is manufactured with high-strength galvanized metal and includes a ground wire.

Frames include plastic spacers. The spacers remain in place for devices with full size back bodies. They must be removed for devices with plus size back bodies, such as dimmers and GFCI outlets.

The frame completes the enclosure, providing a safe installation during the construction phase and allowing the wall plate to be installed at the end of the project.


Each frame includes a leaded ground that supports the full adorne system. Most switches, outlets and wall plates (including cast metals) are automatically grounded to the frame, saving time and ensuring a safe and reliable ground path.

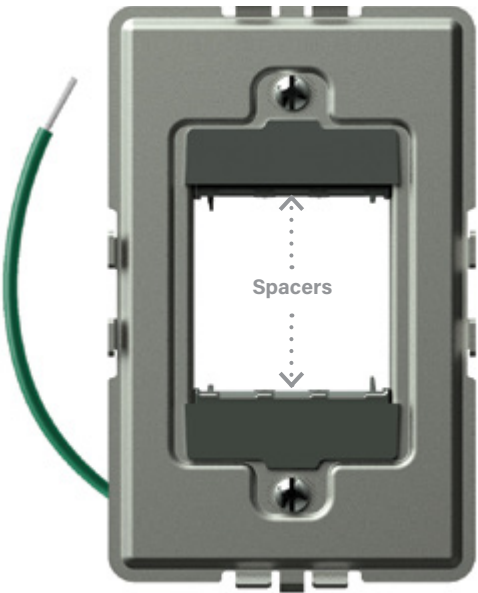


1-Gang, Full Size with Spacers



1-Gang, Plus Size without Spacers




2-Gang with Spacers

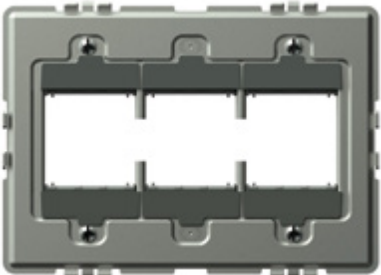


3-Gang with Spacers



4-Gang with Spacers

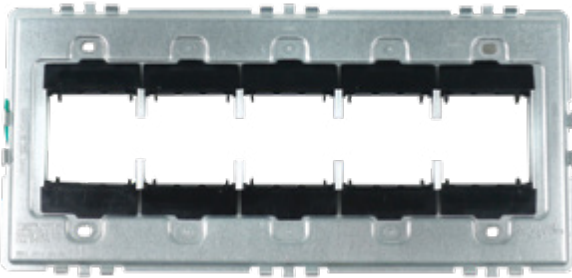

5-Gang with Spacers

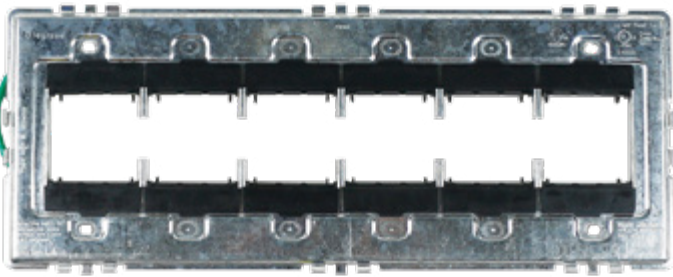

6-Gang with Spacers


Mounting Frames

NAME	PART NUMBER
1-Gang Mounting Frame	AF1G
2-Gang Mounting Frame	AF2G
3-Gang Mounting Frame	AF3G
4-Gang Mounting Frame	AF4G
5-Gang Mounting Frame	AF5G
6-Gang Mounting Frame	AF6G

The adorne Modular System


Complete versatility and unmatched flexibility



adorne fits in all existing NEMA-approved wallboxes.*

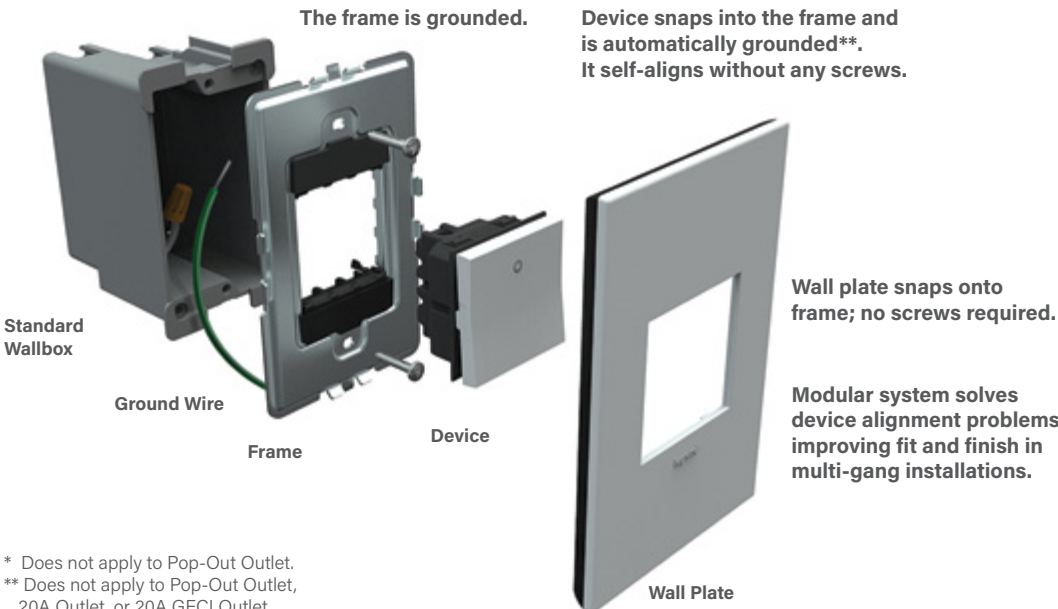

* Does not apply to Pop-Out Outlet.
** Does not apply to Pop-Out Outlet, 20A Outlet, or 20A GFCI Outlet.

Devices simply snap into the frame from the front. During installation, screw the frame to the box, then pull the wires through the frame and wire the device. Then, simply snap the device into the frame.


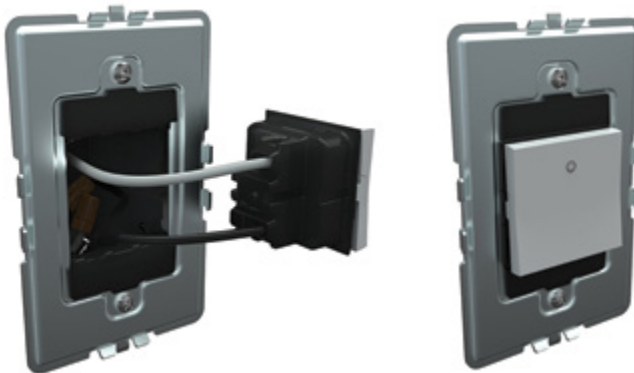


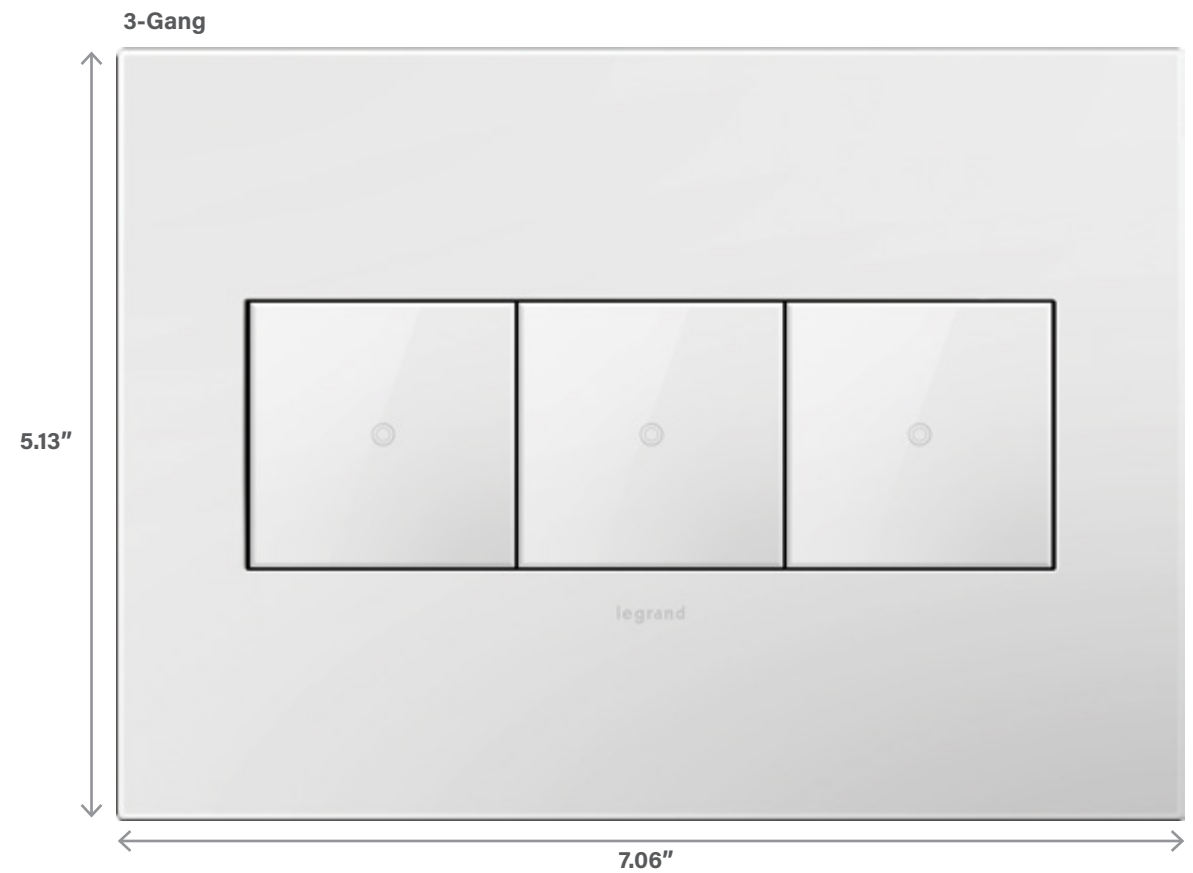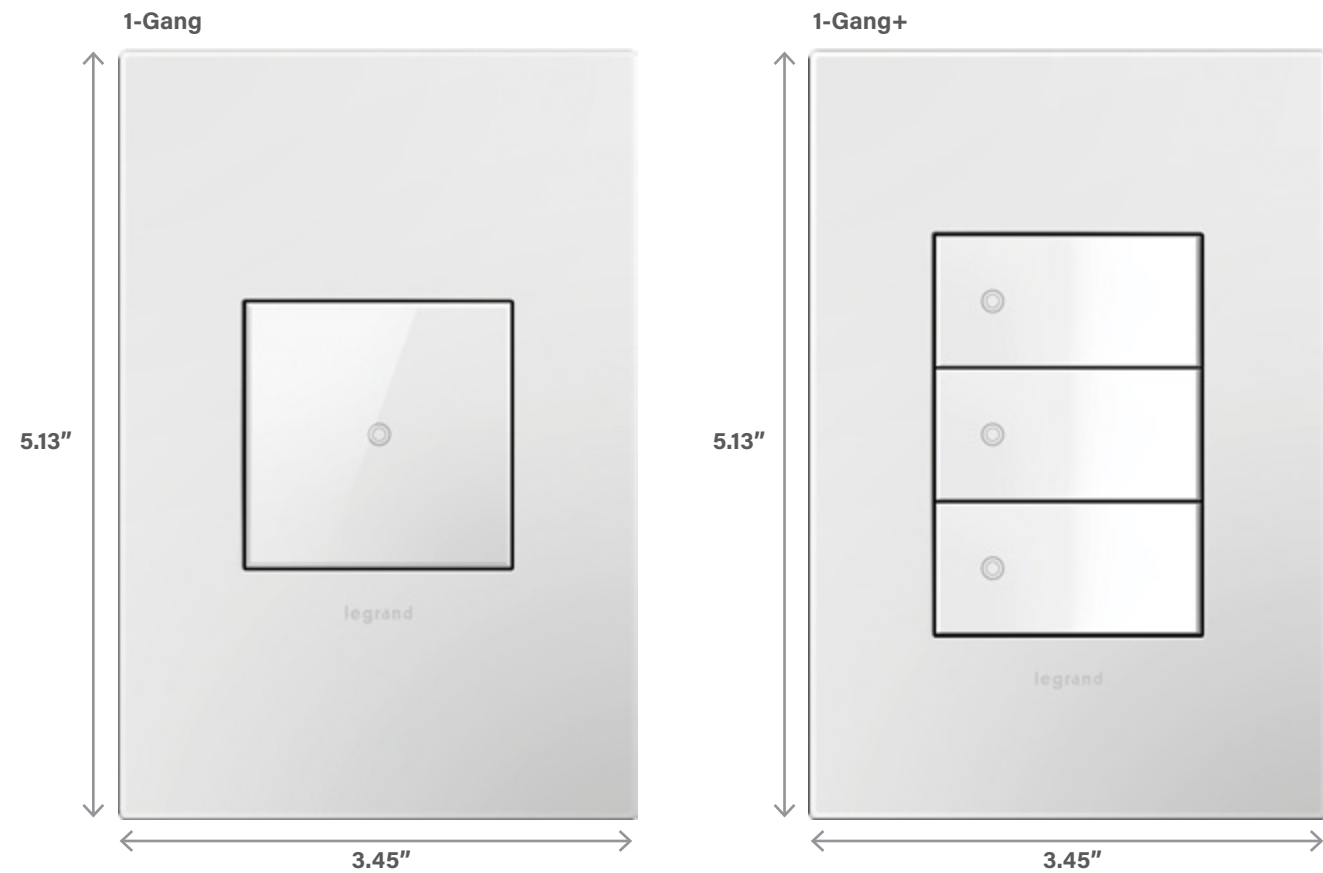

Wall Plates

Available in six gang sizes, adorne wall plates provide the perfect complement to adorne switches, dimmers, outlets and accessories. The collection includes a variety of finishes, from cast metals like Satin Nickel and Oil-Rubbed Bronze to real materials such as linen and wood. In addition, the collection includes a full offering of plastic plates in contemporary and classic colors, as well as three innovative Soft Touch finishes. Each wall plate is packaged with a mounting frame to enable easy installation when paired with a device. All plates are screwless and simply snap onto the included metal frame. See page 40 for more information on the adorne frame system.

All adorne wall plates are UL and ETL-approved. 5- and 6-Gang wall plates are not available in all colors.

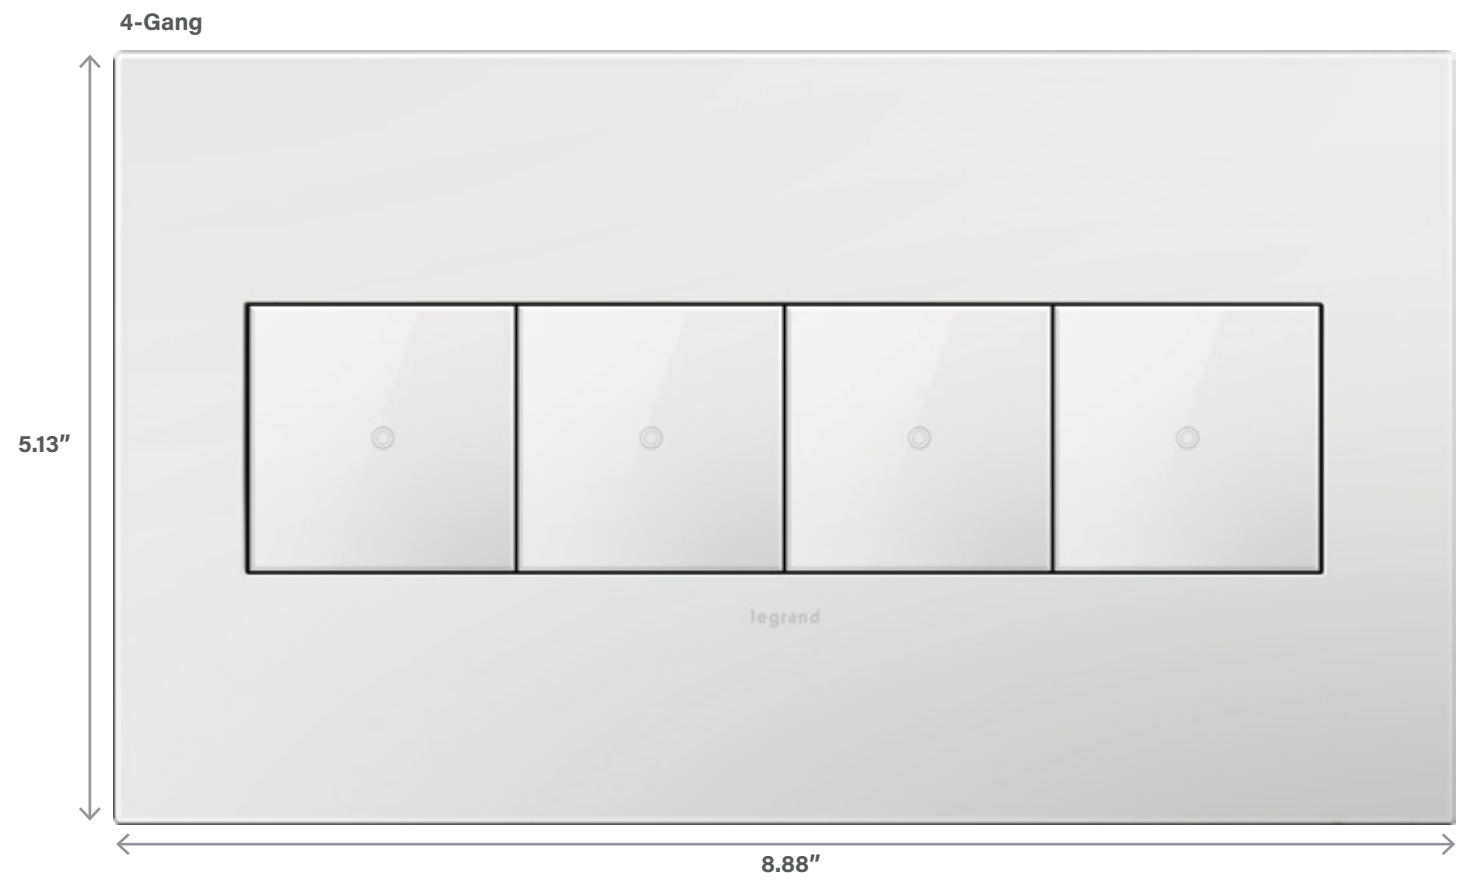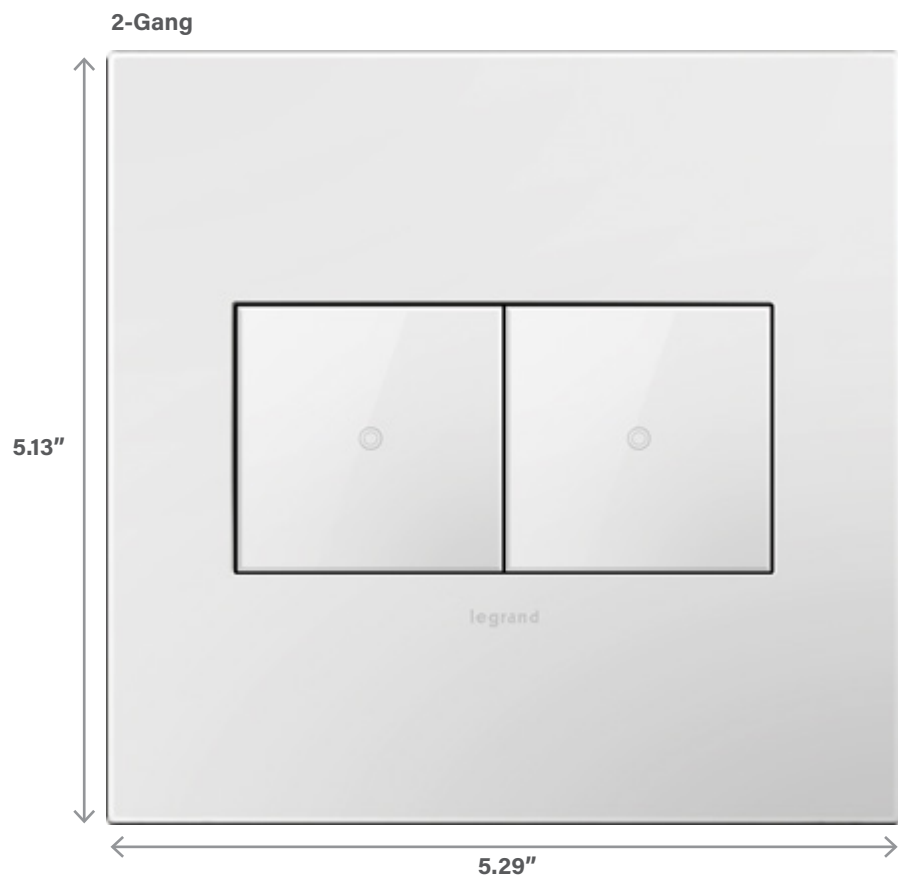

5-Gang
5.13" x 10.7"



6-Gang
5.13" x 12.5"

A RECIPE FOR KITCHEN MAGIC.

The adorne Under-Cabinet Lighting and Power Sytem brings an array of modular components that swap out so easily, you can reconfigure whenever the mood strikes. From speakers and smart phone docks, to lighting and outlets, there's a world of possibilities to choose from with these high-tech, highly convenient building blocks.

Under-Cabinet Lighting and Power



USB Module:
A handy outlet to power
today's devices.



Tamper-Resistant Outlet
Module:
Convenient power snaps
in where you need it.



LED Slimline Light: A low-profile, continuous lighting option.



Linear Lights: For a consistent, continuous light.



Tablet Cradle:
Puts apps and the internet
where you need them.



Mobile Cradle:
Because recharging doesn't
have to look sloppy.



LOOKING UP A view from below reveals how the adorne collection tucks neatly away, offering tons of convenience while hiding underneath your cabinets.

How to Specify the System

The adorne Under-Cabinet Lighting and Power System is a fully customizable and modular solution for eliminating kitchen clutter. It is compatible with any kitchen layout, such as a galley, L-shaped or U-shaped, as well as with any home wiring. In order to ensure you have specified the correct products for your system, we recommend you follow the steps outlined below.

1. Planning Your System Layout

First, determine where you want to install the system. Then measure your cabinets to determine the length of Modular Track required:

- Measure each cabinet length at back of cabinet.
- For installations with a corner, allow 3" on each side for Corner Connector.
- When totaling up the length of required Modular Track, be sure to include the length of the desired Control Box or Direct Wire Connector. For a 1-gang box, allow 5". For a 2-gang box, allow 5.25". For Direct Wire Connector, allow 6". For more detail on Control Box options, see page 53.
- If your selection of Modular Tracks does not match the exact length of your cabinets, you can use a Modular Track Extender to complete the track. This piece can be cut down to 6". Standard 12", 18" and 27" Modular Tracks cannot be shortened.



9" Modular Track



12" Modular Track



18" Modular Track



27" Modular Track




18" Modular Track Extender




Modular Track Corner Connector

Visit www.adornemyhome.com to watch planning and installation videos.


Sample Installation: Length of cabinets is equal to combined length of standard Modular Tracks

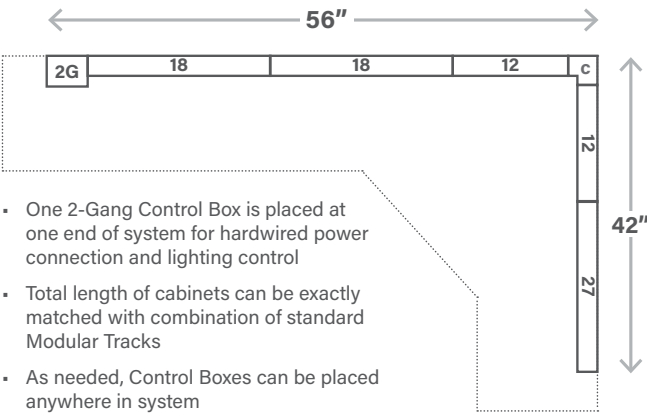

Sample Installation: Length of cabinets is greater than combined length of standard Modular Tracks

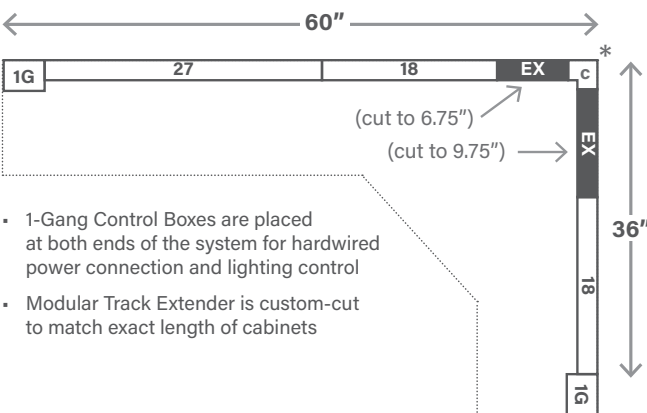

Sample Installation: Direct wire with system controls in a remote location

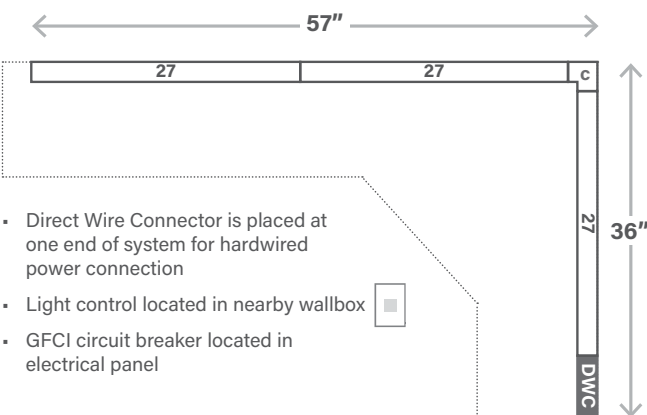

2. Selecting the Control Box and Power Options

Next, select the type of lighting and power connection you'd like to include. For a hardwired installation, there are five options to choose from which enable expanded lighting control options such as dimming:

- Control Box with Paddle Dimmer
- Control Box with Paddle Dimmer and GFCI protection
- Control Box, 1-Gang (No Devices)
- Control Box, 2-Gang (No Devices)
- Direct Wire Connector

For hardwired installations, there must be three separate circuits from the electrical panel:

- Receptacle Circuit: 20 Amps; GFCI-protected; Use #12 wire
- Lighting Circuit: 15 Amps; Use #12 or #14 wire
- Accessory Circuit: 15 Amps; Use #12 or #14 wire

Hardwired Control Boxes



1-Gang Control Box with Paddle Dimmer



2-Gang Control Box with Paddle Dimmer and 15A GFCI



Direct Wire Connector



Control Box, No Devices, 1-Gang*



Control Box, No Devices, 2-Gang*

Compatible with all adorne 2-module devices. The CFL/LED Paddle Dimmer (ADPD453LM2) is recommended for use with the adorne system.

3. Selecting the LED Lights

The adorne Under-Cabinet Lighting and Power System is only compatible with adorne LED lights. Recommended placement for lights is every 18" along Modular Track.

You can select any combination of Linear lights to complete your system. In addition, if you are mounting a light under the cabinet and wish to move it further to the front of the counter, you can use the LED Light Extender. This enables you to increase the length of any light from the Modular Track from a standard 11" to up to 22". This is especially useful in corner installations.



LED Linear Light



LED Slimline Light



Light Extender

4. Choosing Accessories to Complete the System

The final step is to select the accessories to perfectly complement your system. adorne offers a range of options, including USB charging ports, mobile and tablet cradles. Each of these accessories provides flexibility in that it can be added or removed at any time – simply swap it with an existing outlet or blank module to increase your system capabilities.

We're here to help!

We have a dedicated project services team on staff to help you plan your projects, including supplying a full takeoff with a wiring diagram based on your floor plans.

Give us a call at 315.468.8413 or email us your project info at adornemyproject@legrand.us.



Modular Tracks

The adore system is a flexible and modular solution designed to eliminate kitchen clutter. Fully customizable, you can select from several types of modules and modify your system in minutes. Simply pop out an existing module and replace it with a new module at any time.

The Modular Tracks listed below simply plug together to create a full system custom-designed for any kitchen. They form the base of the system, housing all of the wiring that connects the modules.

Each system must include a Control Box or Direct Wire Connector that is hardwired to existing wiring or plugged into an outlet on the backsplash.



NAME	PART NUMBER	DESCRIPTION	COMPLIANCE
12" Modular Track 	APMT12TM2 APMT12W2	Includes one Tamper-Resistant Outlet Module and one Blank Module. Can support up to two LED lights. Provides 120V power via 15A outlet modules and 20A pass-through. Module openings are 6" on-center.	   RoHS
18" Modular Track 	APMT18TM4 APMT18W4	Includes one Tamper-Resistant Outlet Module and one Blank Module. Can support up to two LED lights. Provides 120V power via 15A outlet modules and 20A pass-through. Module openings are 9" on-center.	   RoHS
27" Modular Track 	APMT27TM2 APMT27W2	Includes two Tamper-Resistant Outlet Modules and one Blank Module. Can support up to three LED lights. Provides 120V power via 15A outlet modules and 20A pass-through. Module openings are 9" on-center.	   RoHS
18" Modular Track Extender 	APME18TM2 APME18W2	Enables a perfect fit for any kitchen. Simply cut to length (minimum of 6") and attach to end of Modular Track. Does not include any module openings.	  , RoHS
Modular Track Corner Connector 	APCCTM4 APCCW4	Use with installations that include a right-angle corner to connect two Modular Tracks. Allow 3" on each side for installations with Corner Connectors.	  , RoHS
Short Modular Track 	APST9TM1 APST9W1	Includes one Tamper-Resistant Outlet Module. Intended for use on short cabinet sections. 10" in length but can be cut to 8". Enables direct wire connection to wiring behind the wall. Cannot be combined with any other track section.	   RoHS
Pro Kit 	APMTPROTM1	Includes the adore control box with the paddle dimmer, 18" Track, 12" Track, an additional tamper-resistant outlet, and a tablet cradle.	  , RoHS

We're here to help!

We have a dedicated project services team on staff to help you plan your projects, including supplying a full takeoff based on your floor plans.

Give us a call at 315.468.8413 or email us your project info at adornemyproject@legrand.us.


Control Boxes

Every Under-Cabinet Lighting and Power System must include one of the below Control Boxes or Direct Wire Connector. These boxes connect to existing in-wall wiring or plug into an outlet on the backsplash to provide system power.



Control Boxes include system end caps, ensuring a clean finish on the left and right edges of the installed system.

Hardwired Installations that include USB modules require three circuits.

NAME	PART NUMBER	DESCRIPTION	COMPLIANCE
Control Box with Paddle Dimmer 	APCB1TM4 APCB1W4	Connects to existing in-wall wiring. Fits onto end of Modular Track, adding 5" onto system length. Includes adore 450W CFL/LED Paddle Dimmer (ADPD453LM2). GFCI protection must be provided at the electrical panel.	450W   , RoHS
Control Box with Paddle Dimmer and 15A GFCI 	APCB6TM2 APCB6W2	Connects to existing in-wall wiring. Fits onto end of Modular Track, adding 5.25" onto system length. Includes adore 450W CFL/LED Paddle Dimmer (ADPD453LM2) and 15A Tamper-Resistant GFCI Outlet (AGFTR152M4).	450W 15A   , RoHS
Control Box, No Devices, 1-Gang 	APCB4TM1 APCB4W1	Connects to existing in-wall wiring. Fits onto end of Modular Track, adding 5" onto system length. Customize with your preference of adore dimmers, switches, or outlets.	  , RoHS
Control Box, No Devices, 2-Gang 	APCB5TM1 APCB5W1	Connects to existing in-wall wiring. Fits onto end of Modular Track, adding 5.25" onto system length. Customize with your preference of adore dimmers, switches, or outlets.	  , RoHS
Direct Wire Connector 	APDWCTM1 APDWCW1	Enables direct wire feed of power from in-wall wiring, eliminating need for a Control Box. Connector is 6" in length.	  , RoHS

Lighting

adorne Linear LED Lights are designed for use with the adorne Under-Cabinet Lighting and Power System only. They can be paired with the adorne SofTap Tru-Universal Dimmer (ADTP703TUW4) to enable dimming.



Lights easily plug into a connection port on any system module. Optimal positioning is one light for every 18” of Modular Track. Lights can be added or removed as needed.

NAME	PART NUMBER	DESCRIPTION	COMPLIANCE
 LED Linear Light	ALLNLEDTM4	• 8W • 280 lumens • correlated color temperature: 3000K color rendering index: 95	 , RoHS
 Light Extender	ALEXTLEDTM4	Enables adorne LED lights to be mounted up to 22” from backsplash by extending cord length beyond default 11” Ideal for corner cabinet installations.	 , RoHS

LED Slimline Light + Accessories

NAME	PART NUMBER	DESCRIPTION	COMPLIANCE
 6" LED SlimlineLight	ALSILLED6W4 ALSILLED6TM4	• 2.38 Watts • 158 lumens • coorelated color temperature: 3000K, color rendering index 93 • Tru-Universal Dimmer recommended	 , RoHS
 12" LED Slimline Light	ALSILLED12W4 ALSILLED12TM4	• 4.83 Watts • 328 lumens • coorelated color temperature: 3000K, color rendering index 93 • Tru-Universal Dimmer recommended	 , RoHS
 LED Dimmable Driver	ALSldr30W1 ALSldr30TM1	The 30 Watt LED dimmable drive powers up to 6 feet of adorne expandable light strips.	 , RoHS
 LED Dimmable Driver	ALSldr60TM1 ALSldr60W1	The 60 Watt LED dimmable drive powers up to 10 feet of adorne expandable light strips.	 , RoHS
 Joiner Cable 8"	ALSljC8W4 ALSljC8TM4	Perfect for joining your LED lights and creating a finished look. Adds 8" of space between adorne LED Lights. Pair with an additional cable for even more space	RoHS
 Joiner Cable 14"	ALSljC14W4 ALSljC14TM4	Perfect for joining your LED lights and creating a finished look. Adds 14" of space between adorne LED Lights. Pair with an additional cable for even more space.	RoHS
 T Fitting	ALSltW4 ALSltTM4	Perfect for splitting power to different locations while creating a finished look. Use Tee Cables to split the power from an adorne driver into two different directions.	RoHS
 Power Cable Extender 36"	ALSlPC36W4 ALSlPC36TM4	Perfect for extending cables and hiding cables out of sight for a clean, finished look. Use the Power cable extender to extend the length of cables, allowing you to hide drivers in or above cabinets.	RoHS

Modules and Accessories

The Under-Cabinet Lighting and Power System modules are designed to fit in any module opening, and can be easily added or removed by using the included module tool. Simply fit the tool into either end of the module and pop it out of the track.




Cradles do not occupy a module opening. Instead, they save space by resting on the back edge of the track.

NAME	PART NUMBER	DESCRIPTION	COMPLIANCE
 15A Outlet Module	APTR15TM4 APTR15W4	Provides two power outlets by snapping into any module opening. Tamper-resistant outlet is designed with a patented shutter system. Included with short, 12”, 18”, and 27” Modular Tracks.	15A, 120V  , RoHS
 USB Outlet Module	APUSB3TM4 APUSB3W4	Provides two USB charging ports for devices such as mobile phones and tablets by snapping into any module opening. Charging cable not included.	3.1A, 5V  , RoHS
 Mobile Phone Cradle	AAPCTM4 AAPCW4	Attaches anywhere along track to hold a mobile phone. Perfect for use with USB Outlet Module while charging devices.	RoHS
 Tablet Cradle	AATCM4 AATCW4	Attaches anywhere along track to hold a tablet. Perfect for use with USB Outlet Module while charging devices.	RoHS

The adorne system is optimized to provide a premium under-cabinet solution by utilizing the latest innovations in lighting research and LED technologies.

System specifications:

- OSRAM OSOLON® Color Champ LED
- Nominal 3000K Correlated Color Temperature (CCT) warm light output
- Linear Lights have a Color Rendering Index (CRI) of 95
Slimline Lights have a Color Rendering Index (CRI) of 93
- Excellent range of color differentiation and rendering of the important red color (think red meat and apples) and skin tones
- A bright lumen light output provides optimized lighting for the under-cabinet environment
- Efficient driver design integrated in each fixture results in:
 - Reliable and smooth dimming
 - ENERGY STAR certification
 - Rated for 40,000 hours of high performance
- LED quality control uses a “fine bin system” based on a three-step MacAdams ellipse to ensure color consistency

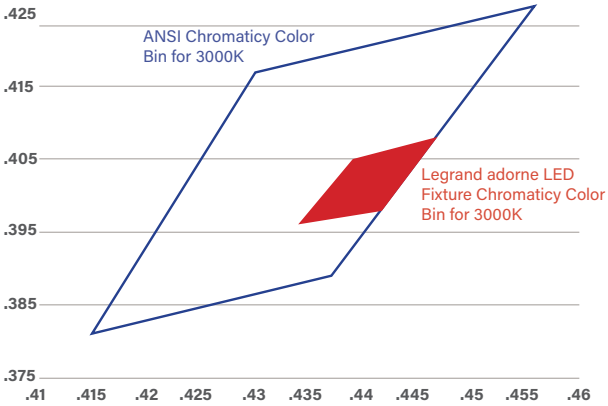


adorne individual LEDs are specifically selected to ensure fixture output CCT uniformity within a range of less than 100. This tight manufacturing assurance process ensures that variations inherent in the LED chip manufacturing process do not compromise reliable light quality.



the
radiant[®]
collection

Dimmers & Switches

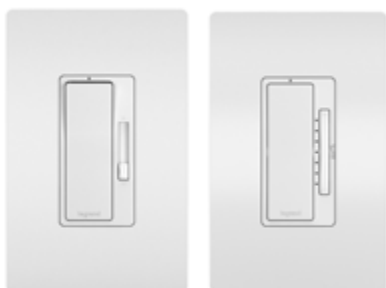


TRU-UNIVERSAL DIMMER | RH703PTUW

The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable lighting types and loads (except 0-10V). White LED enables easy location in the dark.

MULTI-LOCATION MASTER DIMMER | HCL453PMMW

This CFL/LED multi-location dimmer allows dimming from multiple locations.

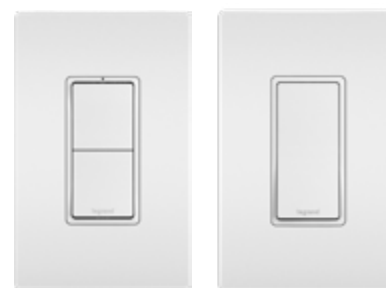

SINGLE-POLE COMBINATION SWITCH | RCD11W

The clean look of radiant hits home in this handsome combination switch. Two single pole switches tuck neatly into a single wall plate, delivering convenience without the clutter.

SINGLE-POLE SWITCH WITH LOCATOR LIGHT | TM870WSL

Conveniently locate your switch in the dark with the small, subtle locator light that illuminates when switched off.

Outlets



TAMPER-RESISTANT OUTLET | 885TRW

Discreetly prevents insertion of foreign objects with patented “invisi-shutters.”

TAMPER-RESISTANT SELF-TEST GFCI OUTLET | 1597TRW

Self-tests at the industry-leading rate of every 3 seconds to offer superior ground-fault protection.

TAMPER-RESISTANT SELF-TEST GFCI USB TYPE-A/C OUTLET | 1597TRUSBACW

A one-of-a-kind solution featuring superior ground-fault protection and convenient built-in charging in a single outlet.



SINGLE POLE/3-WAY SWITCH/TAMPER-RESISTANT OUTLET COMBINATION | RCD38TRW

Fit two devices neatly into the footprint of one with this combination single-pole/3-way switch and tamper-resistant outlet.

WEATHER-RESISTANT OUTLET | 885TRWRW

Perfect for a home's outdoor spaces, this outlet is made to work, rain or shine.

USB Charging Solutions



WIRELESS CHARGER | RWC826USBWCCV2
Instantly provides a revolutionary new way to charge your phone using Qi charging technology and cuts the cord for your devices — finally, they are truly wireless.

TAMPER-RESISTANT ULTRA-FAST PLUS POWER DELIVERY USB TYPE-C/C OUTLET | R26USBPBW
Combines our industry-leading 6 amps of power with advanced Power Delivery for a charge that is up to 2x faster.



TAMPER-RESISTANT ULTRA-FAST USB TYPE-A/C OUTLET | R26USBAC6W
With an industry-leading 6 amps of power, this USB outlet provides a quicker charge for phones, tablets and other devices, meaning no more low battery anxiety.

QUAD USB CHARGER | TM8USB4WCC6
With 4.2 amps of charging capacity, the quad USB gives users the power to charge up to four devices simultaneously without the need for bulky adapters.

Night Lights



FULL LED NIGHT LIGHT | NTLFULLW
Energy-efficient soft-glow LED features five adjustable brightness levels and optional louver for greater control.
Shown with included optional louver.



NIGHT LIGHT WITH TAMPER-RESISTANT OUTLET | NTL885TRW
This seamlessly integrated night light features five adjustable brightness levels, an optional louver for greater light control and a hidden sensor that turns light on in the dark, off in daylight.


COMBINATION TAMPER-RESISTANT SELF-TEST NIGHT LIGHT/GFCI | 1597NTLW
For superior safety, this outlet offers all the protection of tamper-resistance and GFCI functionality, with an included night light for added convenience.



Smart Lighting



Create scenes,
set schedules
and control
lights with
the Legrand
Smart Lights,
Wi-Fi app.



Manage lights
and power, from
anywhere, with
the Legrand
Home + Control
app.



radiant[®] WITH Wi-Fi



SMART SWITCH WITH WI-FI | WWRL10WHCCV2
Connect to your home Wi-Fi and control lights in one or a few rooms, from anywhere. Plug-in and Outdoor versions also available.

SMART TRU-UNIVERSAL DIMMER WITH WI-FI | WWRL50WHCCV2
The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V). Connects to Wi-Fi. Plug-in version also available.

SMART OUTLET WITH WI-FI | WWRR15WHCCV2
Connect to your home Wi-Fi and control power from anywhere. One outlet is Wi-Fi controlled, the other is always on.

Note: radiant with Wi-Fi products are not compatible with the Netatmo platform.

radiant[®] WITH Netatmo



SMART SWITCH WITH NETATMO | WNRL10WH
Get advanced control of your lights from any smart device, from anywhere. Optimized for whole home use. Requires Smart Gateway. Tru-Universal Dimmer and Plug-in versions also available.

SMART OUTLET WITH NETATMO | WNRR15WH
Get advanced control of power from any smart device, from anywhere. One outlet is app-controlled, the other is always on. Requires Smart Gateway. 15A and 20A versions available.

HOME/AWAY WIRELESS SMART SWITCH WITH NETATMO | WNRL33WH
Add to any wall or surface for one touch control of a full lighting scene. Requires Smart Gateway. Wake/Sleep version also available.

Dimmers

Conveniently conserve energy and create the perfect mood by adjusting dimmer light levels with a single slide.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Incandescent Single-Pole/3-Way Dimmer 	RH1103PTC RH1103PW	Usable in single-pole and 3-way applications. Features interchangeable faceplates.	Tri-Color* White	15A, 120V	1100W	 , RoHS
Incandescent Single-Pole/3-Way Dimmer 	RH703PDBCCV4 RH703PNICCV4 RH703PTC RH703PW	Usable in single-pole and 3-way applications. Features interchangeable faceplates.	Dark Bronze Nickel Tri-Color* White	120V	700W	 , RoHS
0-10V LED/Fluorescent Dimmer 	RH4FBL3PTC RH4FBL3PW	Features interchangeable faceplates.	Tri-Color* White	10A, 120V		 , RoHS
Tru-Universal Single-Pole/3-Way Dimmer 	RH703PTUTC RH703PTUW	The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V). Usable in single-pole and 3-way applications. Features interchangeable faceplates.	Tri-Color* White	120V, 60Hz	Incandescent, Halogen & ELV: 700W MLV: 500VA LED/CFL: 450W EFL: 5.5A	 , RoHS
CFL/LED Dimmer (Not intended for electronic low voltage loads) 	RHCL453PDBCCV4 RHCL453PGCCV4 RHCL453PNICCV4 RHCL453PTC RHCL453PW	Features interchangeable faceplates.	Dark Bronze Graphite Nickel Tri-Color* White	120 VAC, 60 Hz	450W CFL/LED; 700W Incandescent	 , RoHS
Magnetic Low-Voltage Single-Pole/3-Way Dimmer 	RHLV1103PTC RHLV1103PW	Usable in single-pole and 3-way applications. Features interchangeable faceplates.	Tri-Color* White	120 VAC	1100W	 , RoHS

Note: Wall plates sold separately. Tri-color includes: White, Light Almond and Ivory. Bi-Color includes: Nickel & Dark Bronze
Due to manufacturer variations and modifications, we are unable to ensure indefinite dimming compatibility with any bulb or fixture.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Magnetic Low-Voltage Single-Pole/3-Way Dimmer 	RHLV703PTC RHLV703PW	Usable in single-pole and 3-way applications. Features interchangeable faceplates.	Tri-Color* White	120V	700W	 , RoHS
2-Wire Fluorescent Dimmer 	RHFB83PTC RHFB83PW	Features interchangeable faceplates.	Tri-Color* White	8A, 120V		 , RoHS
Interchangeable Face Cover 	RHKIT RHKITBK RHKITDB RHKITGRY RHKITI RHKITLA RHKITNI RHKITW RHKITGPCCV6	Features interchangeable faceplates.	Brown Black Dark Bronze Gray Ivory Light Almond Nickel White Graphite		Applies to all dimmers on pages 14 & 15	 , RoHS

Multi-Location Dimmers

Conveniently conserve energy and create the perfect mood by adjusting dimmer light levels with a single slide.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Multi-Location Master Dimmer 	HCL453PMMTC HCL453PMMW	Features interchangeable faceplates.	Tri-Color* White	120, 60Hz	700W Incandescent	 , RoHS
Interchangeable Face Cover for Multi-Location Master Dimmer 	HMKIT HMKITBK HMKITDB HMKITGRY HMKITI HMKITLA HMKITNI HMKITW	Features interchangeable faceplates.	Brown Black Dark Bronze Gray Ivory Light Almond Nickel White			 , RoHS
Multi-Location Remote Dimmer 	HMRTC HMRW	Features interchangeable faceplates.	Tri-Color* White	120, 60Hz		 , RoHS
Interchangeable Face Cover for Multi-Location Remote Dimmer 	HMRKIT HMRKITBK HMRKITDB HMRKITGRY HMRKITI HMRKITLA HMRKITNI HMRKITW	Features interchangeable faceplates.	Brown Black Dark Bronze Gray Ivory Light Almond Nickel White			 , RoHS

Switches

Modern low-profile paddle switches with no screws in sight.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPLIANCE
15A Single-Pole Switch*	TM870 TM870BK TM870DBCC10 TM870GCC10 TM870GRY TM870I TM870ISL* TM870LA TM870LASL* TM870NICC10 TM870W TM870WSL*	15A Switch. Part numbers with an asterisk indicate a model with included locator light.	Brown Black Dark Bronze Graphite Gray Ivory Ivory Light Almond Light Almond Nickel White White	15A, 120V	 , RoHS
3-Way Switch*	TM873 TM873BK TM873DBCC10 TM873GCC10 TM873GRY TM873I TM873ISL* TM873LA TM873LASL* TM873NICC10 TM873W TM873WSL*	15A Switch. Part numbers with an asterisk indicate a model with included locator light.	Brown Black Dark Bronze Graphite Gray Ivory Ivory Light Almond Light Almond Nickel White White	15A, 120V	 , RoHS
15A 4-Way Switch	TM874 TM874BK TM874DBCC6 TM874GCC6 TM874I TM874ISL* TM874LA TM874LASL* TM874NICC6 TM874W TM874WSL*	15A Switch. Part numbers with an asterisk indicate a model with included locator light.	Brown Black Dark Bronze Graphite Ivory Ivory Light Almond Light Almond Nickel White White	15A, 120V	 , RoHS

* These switches are identical

Fan Controls

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPLIANCE
Fan Speed Control De-Hummer, Single-Pole/3-Way	RHDH163PGCCV4 RHDH163PTC RHDH163PBCCCV4	Usable in single-pole and 3-way applications.	Graphite Tri-Color* Bi-Color *	1.6A, 120V	 , RoHS
Fan Speed Control De-Hummer, Single-Pole/3-Way	RHDH163PW	Usable in single-pole and 3-way applications.	White	1.6A, 120V	 , RoHS

Note: Wall plates sold separately.

Combination Switches

Modern low-profile paddle switches with no screws in sight.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPLIANCE
Two Single-Pole Switches & Single-Pole/3-Way Switch	RCD113 RCD113BK RCD113GRY RCD113I RCD113LA RCD113W	Usable in single-pole and 3-way applications. Features a locator light.	Brown Black Gray Ivory Light Almond White	15A, 120/125V	 , RoHS
Two Single-Pole Switches	RCD11 RCD11BKCC6 RCD11GRY RCD11I RCD11LA RCD11W	Usable in single-pole applications. Features a locator light.	Brown Black Gray Ivory Light Almond White	15A, 120/125V	 , RoHS
Two Single-Pole/3-Way Switches*	RCD33BK RCD33GRY RCD33I RCD33LA RCD33W	Usable in single-pole and 3-way applications. Features a locator light.	Black Gray Ivory Light Almond White	15A, 120/125V	 , RoHS
Single-Pole/3-Way Switch & Tamper-Resistant Single Outlet*	RCD38TRBK RCD38GRY RCD38TRI RCD38TRLA RCD38TRW	Usable in single-pole and 3-way applications. Features a locator light.	Black Gray Ivory Light Almond White	15A, 120/125V	 , RoHS
Locator Light Module	RCDLM		NA		 , RoHS

* These switches are identical

Note: Wall plates sold separately.

Sensors

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPLIANCE
120V Single-Pole/3-Way Occupancy Sensor	RRW600FPG RRW600UTC RRW600UBCCCV4	Features interchangeable faceplates.	Graphite Tri-Color* Bi-Color*	120V	 , RoHS
120V Single-Pole Vacancy Sensor	RRW600VTC	Features interchangeable faceplates.	Tri-Color*	120V	 , RoHS

Timers

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPLIANCE
4-Button Digital Timer	RT2BK RT2DBCCV4 RT2I RT2LA RT2NICCV4 RT2W	Preset time delay options include 10, 20, 30 or 60 min. Includes LED indicator light.	Black Dark Bronze Ivory Light Almond Nickel White	120V	 , RoHS

Note: Wall plates sold separately.
*Tri-color includes: White, Light Almond and Ivory.
*Bi-Color includes: Nickel & Dark Bronze

Outlets

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA CONFIG. NUMBER	COMPLIANCE
Tamper-Resistant Outlet	885TR 885TRBK 885TRDBCC12 885TRGCC12 885TRGRY 885TRI 885TRLA 885TRNICC12 885TRW	Tamper-resistant outlet featuring patented invis-shutters for discreet protection.	Brown Black Dark Bronze Graphite Gray Ivory Light Almond Nickel White	15A, 120/125V	5-15R	 , RoHS
	TR26352R TR26352RBK TR26352RDBCC6 TR26352RGCC6 TR26352RGRY TR26352RI TR26352RLA TR26352RNICC6 TR26352RW		Brown Black Dark Bronze Graphite Gray Ivory Light Almond Nickel White	20A, 125V	5-20R	 , RoHS
Weather-Resistant Outlet	885TRWR 885TRWRI 885TRWRLA 885TRWRW	NEC compliant for both tamper- and weather-resistance.	Brown Ivory Light Almond White	15A, 125V	5-15R	 , RoHS
radiant In-Wall Outlet Relocation Kit	IWPE-WH IWPEUSBAC-WH	Extends power from any hard-to-reach outlet to a more convenient location. Available versions include a Tamper-Resistant Outlet or a Tamper-Resistant USB Type-A/C Outlet.	White	15A	5-15R	 , RoHS

GFCI

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA CONFIG. NUMBER	COMPLIANCE
 Tamper-Resistant Self-Test GFCI Outlet with Night Light	1597NTLTRBKCC4 1597NTLTRDBCC4 1597NTLTRI 1597NTLTRLA 1597NTLTRNICC4 1597NTLTRW	Provides superior, point-of-use ground-fault protection. Self-tests every three seconds to ensure it is ready to protect. Features built-in night light.	Black Dark Bronze Ivory Light Almond Nickel White	15A, 125V	5-15R	 , RoHS
	2097NTLTRGRY 2097NTLTRI 2097NTLTRLA 2097NTLTRW		Gray Ivory Light Almond White	20A, 125V	5-20R	 , RoHS
 Single-Pole Switch with Tamper-Resistant Self-Test GFCI Outlet	1597SWTTRBKCC4 1597SWTTRICC4 1597SWTTRLACC4 1597SWTTRWCC4	Combination switch and GFCI outlet. Provides superior, point-of-use ground-fault protection. Self-tests every three seconds to ensure it is ready to protect.	Black Ivory Light Almond White	15A, 125V	5-15R	 , RoHS
 Tamper-Resistant Self-Test GFCI Outlet	1597TR 1597TRBK 1597TRDBCC4 1597TRGCC4 1597TRGRY 1597TRI 1597TRLA 1597TRNICC4 1597TRW	Provides superior, point-of-use ground-fault protection. Self-tests every three seconds to ensure it is ready to protect.	Brown Black Dark Bronze Graphite Gray Ivory Light Almond Nickel White	15A, 125V	5-15R	 , RoHS
	2097TR 2097TRBK 2097TRGRY 2097TRI 2097TRLA 2097TRW 2097TRNI 2097TRDB 2097TRG		Brown Black Gray Ivory Light Almond White Nickel Dark Bronze Graphite	20A, 125V	5-20R	 , RoHS
 Tamper-Resistant Self-Test GFCI Outlet with Audible Alarm	1597TRA 1597TRABK 1597TRA 1597TRALA 1597TRAW	Provides superior, point-of-use ground-fault protection. Self-tests every three seconds to ensure it is ready to protect. Features an audible alarm to alert users to trips or failures, perfect for sub-pumps and deep freezers.	Brown Black Ivory Light Almond White	15A, 125V	5-15R	 , RoHS
 Spec-Grade Weather-Resistant Self-Test GFCI Outlet	1597TRWR 1597TRWRBK 1597TRWRGRY 1597TRWRI 1597TRWRLA 1597TRWRW	Provides superior, point-of-use ground-fault protection for outdoor use. NEC compliant for weather-resistance. Self-tests every three seconds to ensure it is ready to protect.	Brown Black Gray Ivory Light Almond White	15A, 125V	5-15R	 , RoHS

Note: Wall plates sold separately.

Dual-Function AFCI/GFCI & AFCI

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA CONFIG. NUMBER	COMPLIANCE
 Tamper-Resistant Dual-Function AFCI/GFCI Outlet	AFGF152TR AFGF152TRBK AFGF152TRGRY AFGF152TRI AFGF152TRLA AFGF152TRW	Provides protection against arc- and ground-fault occurrences. Includes individual indicator lights for each fault type.	Brown Black Gray Ivory Light Almond White	15A, 125V	5-15R	 , RoHS
	AFGF202TR AFGF202TRBK AFGF202TRGRY AFGF202TRI AFGF202TRLA AFGF202TRW		Brown Black Gray Ivory Light Almond White	20A, 125V	5-20R	 , RoHS
 Tamper-Resistant Branch Circuit AFCI Outlet	AF152TR AF152TRBK AF152TRGRY AF152TRI AF152TRLA AF152TRW	Provides point-of-use arc-fault protection.	Brown Black Gray Ivory Light Almond White	15A, 125V	5-15R	 , RoHS
	AF202TR AF202TRBK AF202TRGRY AF202TRI AF202TRLA AF202TRW		Brown Black Gray Ivory Light Almond White	20A, 125V	5-20R	 , RoHS
 Dead Front Dual-Function AFCI/GFCI Outlet	AFGF202DFI AFGF202DFLA AFGF202DFW	Provides protection against arc-fault and ground-fault occurrences.	Ivory Light Almond White	20A, 125V		 , RoHS
 Dead Front Branch Circuit AFCI Outlet	AF202DFI AF202DFLA AF202DFW	Point-of-Use Arc Fault Detection	Ivory Light Almond White	20A, 125V		 , RoHS

Note: Wall plates sold separately.

USB Charging Solutions

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA CONFIG. NUMBER	COMPLIANCE
Wireless Charger 	RWC826USBWCCV2 RWC826USBICCV2 RWC826USBLACCV2 RWC826USBBKCCV2	Installs in place of a single-gang outlet to provide Qi wireless charging, as well as a tamper-resistant duplex outlet with USB Type-A port.	White Ivory Light Almond Black	15A, 125V	5-15R	 , RoHS
15A Tamper-Resistant USB Type-C/C Outlet 	R26USBCCBK R26USBCCDBCCV4 R26USBCCG R26USBCCI R26USBCCLA R26USBCCNICC6 R26USBCCW	Outlet with two built-in USB Type-C ports, for use with the newer USB Type-C and its conveniently reversible connector. Features discreet tamper-resistance through patented invis-shutters.	Black Dark Bronze Graphite Ivory Light Almond Nickel White	15A, 120V	3.1 Amp	 , RoHS
15A Tamper-Resistant USB Type-A/C Outlet 	R26USBACBK R26USBACDBCCV4 R26USBACG R26USBACI R26USBACLA R26USBACNICC6 R26USBACW	Outlet features built-in ports for both USB Type-A and USB Type-C to fit any device, no adapter needed. Features discreet tamper-resistance through patented invis-shutters.	Black Dark Bronze Graphite Ivory Light Almond Nickel White	15A, 120V	3.1 Amp	 , RoHS
15A Tamper-Resistant USB Type-A/A Outlet 	TM826USBBK TM826USBDBCCV4 TM826USBGCCV4 TM826USBI TM826USBLA TM826USBNICC6 TM826USBW	Outlet with two built-in USB Type-A ports. Features discreet tamper-resistance through patented invis-shutters.	Black Dark Bronze Graphite Ivory Light Almond Nickel White	15A, 120V	3.1 Amp	 , RoHS
Quad USB Charger 	TM8USB4BKCC6 TM8USB4ICC6 TM8USB4LACC6 TM8USB4NICC6 TM8USB4WCC6	Charge more devices simultaneously with four USB Type-A ports in a single device. Features 4.2A of total charging capacity.	Black Ivory Light Almond Nickel White	15A, 125V		 , RoHS

Note: Wall plates sold separately.

Ultra-Fast USB Outlets

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA CONFIG. NUMBER	COMPLIANCE
 15A Tamper-Resistant Ultra-Fast USB Type-A/C Outlet	R26USBAC6BK R26USBAC6DBCCV4 R26USBAC6G R26USBAC6I R26USBAC6LA R26USBAC6NICCV4 R26USBAC6W	USB Outlet with industry-leading amperage to charge devices up to 40% faster. Includes ports for USB Type-A and Type-C to fit any device, no adapter needed.	Black Dark Bronze Graphite Ivory Light Almond Nickel White	6A	5-15R	 , RoHS
 15A Tamper-Resistant Ultra-Fast USB Type-C/C Outlet	R26USBCC6BK R26USBC6DBCCV4 R26USBCC6G R26USBCC6I R26USBCC6LA R26USBCC6NICCV4 R26USBCC6W	USB Outlet with industry-leading amperage to charge devices up to 40% faster. Features two built-in USB Type-C ports for future-proof charging of the latest and upcoming devices.	Black Dark Bronze Graphite Ivory Light Almond Nickel White	6A	5-15R	 , RoHS
 Outdoor Ultra-Fast USB Type-A/C Outlet	WRR26USBAC6BK WRR26USBAC6I WRR26USBAC6LA WRR26USBAC6W	Bring USB charging outdoors to decks, patios and porches. The outlet is UL listed to UL498 for weather resistance and must be installed in a weatherproof enclosure per NEC requirements.	Black Ivory Light Almond White	6A, 125V	5-15R	 , RoHS

Ultra-Fast PLUS Power Delivery

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA CONFIG. NUMBER	COMPLIANCE
 Tamper-Resistant Ultra-Fast PLUS Power Delivery USB Type-C/C Outlet	R26USBPDBK R26USBPD R26USBPDDBCC6 R26USBPDGCC6 R26USBPDGRY R26USBPDI R26USBPDLA R26USBPDNICC6 R26USBPDW TR20USBPDBK TR20USBPD TR20USBPDDDB TR20USBPDG TR20USBPDGRY TR20USBPDI TR20USBPDLA TR20USBPDNI TR20USBPDW	Charges devices up to 2X faster by combining our ultra-fast amperage with advanced Power Delivery. Includes two future-proof USB Type-C ports.	Black Brown Dark Bronze Graphite Gray Ivory Light Almond Nickel White Black Brown Dark Bronze Graphite Gray Ivory Light Almond Nickel White	6A, 15A, 125V,  6A, 20A, 125V, 	5-15R 5-15R	 , RoHS

Note: Wall plates sold separately.

GFCI USB

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA CONFIG. NUMBER	COMPLIANCE
 Tamper-Resistant Self-Test GFCI USB Type-A/A Outlet	1597TRUSBAABK 1597TRUSBAA 1597TRUSBAADB 1597TRUSBAAG 1597TRUSBAAGRY 1597TRUSBAAI 1597TRUSBAALA 1597TRUSBAANI 1597TRUSBAAW	The first-ever GFCI Outlet with built-in USB charging, offering superior ground-fault protection and modern convenience in a single solution. Includes two USB Type-A ports.	Black Brown Dark Bronze Graphite Gray Ivory Light Almond Nickel White	15A, 125V	5-15R	 , RoHS
	2097TRUSBAABK 2097TRUSBAA 2097TRUSBAADB 2097TRUSBAAG 2097TRUSBAAGRY 2097TRUSBAAI 2097TRUSBAALA 2097TRUSBAANI 2097TRUSBAAW		Black Brown Dark Bronze Graphite Gray Ivory Light Almond Nickel White	20A, 125V	5-20R	 , RoHS
 Tamper-Resistant Self-Test GFCI USB Type-A/C Outlet	1597TRUSBACBK 1597TRUSBAC 1597TRUSBACDB 1597TRUSBACG 1597TRUSBACGRY 1597TRUSBACI 1597TRUSBACLA 1597TRUSBACNI 1597TRUSBACW	The first-ever GFCI Outlet with built-in USB charging, offering superior ground-fault protection and modern convenience in a single solution. Includes USB Type-A and USB Type-C ports to charge any and all your devices, no adapter necessary.	Black Brown Dark Bronze Graphite Gray Ivory Light Almond Nickel White	15A, 125V	5-15R	 , RoHS
	2097TRUSBACBK 2097TRUSBAC 2097TRUSBACDB 2097TRUSBACG 2097TRUSBACGRY 2097TRUSBACI 2097TRUSBACLA 2097TRUSBACNI 2097TRUSBACW		Black Brown Dark Bronze Graphite Gray Ivory Light Almond Nickel White	20A, 125V	5-20R	 , RoHS
 Outdoor Self-Test GFCI USB Type-A/C Outlet	1597TRWRUSBACBK 1597TRWRUSBACGRY 1597TRWRUSBACI 1597TRWRUSBACLA 1597TRWRUSBACW	Engineered for outdoor use, this version of our first-of-its-kind GFCI USB Outlet also features weather-resistance to bring superior ground-fault protection and modern convenience to patios, pool areas and more -- all in a single solution. Includes USB Type-A and USB Type-C ports to charge any and all your devices, no adapter necessary.	Black Gray Ivory Light Almond White	15A, 125V	5-15R	 , RoHS
	2097TRWRUSBACBK 2097TRWRUSBACGRY 2097TRWRUSBACI 2097TRWRUSBACLA 2097TRWRUSBACW		Black Gray Ivory Light Almond White	20A, 125V	5-20R	 , RoHS
 Tamper-Resistant Self-Test GFCI USB Type-C/C Outlet	1597TRUSBCCBK 1597TRUSBCC 1597TRUSBCCDB 1597TRUSBCCG 1597TRUSBCCGRY 1597TRUSBCCI 1597TRUSBCCLA 1597TRUSBCCNI 1597TRUSBCCW	The first-ever GFCI Outlet with built-in USB charging, offering superior ground-fault protection and modern convenience in a single solution. Includes two future-proof USB Type-C ports to accommodate the latest and upcoming devices.	Black Brown Dark Bronze Graphite Gray Ivory Light Almond Nickel White	15A, 125V	5-15R	 , RoHS
	2097TRUSBCCBK 2097TRUSBCC 2097TRUSBCCDB 2097TRUSBCCG 2097TRUSBCCGRY 2097TRUSBCCI 2097TRUSBCCLA 2097TRUSBCCNI 2097TRUSBCCW		Black Brown Dark Bronze Graphite Gray Ivory Light Almond Nickel White	20A, 125V	5-20R	 , RoHS

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA CONFIG. NUMBER	COMPLIANCE
 Outdoor Self-Test GFCI USB Type-C/C Outlet	1597TRWRUSBCCBK 1597TRWRUSBCCGRY 1597TRWRUSBCCI 1597TRWRUSBCCLA 1597TRWRUSBCCW	Engineered for outdoor use, this version of our first-of-its-kind GFCI USB Outlet also features weather-resistance to bring superior ground-fault protection and modern convenience to patios, pool areas and more -- all in a single solution. Includes two future-proof USB Type-C ports to accommodate the latest and upcoming devices.	Black Gray Ivory Light Almond White	15A, 125V	5-15R	 , RoHS
	2097TRWRUSBCCBK 2097TRWRUSBCCGRY 2097TRWRUSBCCI 2097TRWRUSBCCLA 2097TRWRUSBCCW		Black Gray Ivory Light Almond White	20A, 125V	5-20R	 , RoHS

Night Lights

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA CONFIG. NUMBER	COMPLIANCE
 Night Light with Two 15A Tamper-Resistant Outlets	NTL885TRBKCC6 NTL885TRICC6 NTL885TRLACC6 NTL885TRNICC6 NTL885TRW	Five Adjustable Light Settings	Black Ivory Light Almond Nickel White	15A, 120/125V	5-15R	 , RoHS
 Night Light With Single-Pole, 3-Way Switch	NTL873BKCC6 NTL873ICC6 NTL873LACC6 NTL873NICC6 NTL873WCC6	Five Adjustable Light Settings	Black Ivory Light Almond Nickel White	15A, 120/125V		 , RoHS
 Full Night Light with Adjustable Light Levels	NTLFULLTC NTLFULLW	Five Adjustable Light Settings An optional louver is included for added light-level control	Tri-Color* White	120/125V		 , RoHS
 Horizontal Step Light	NTLHORZTCCC6 NTLHORZWCC6	Five Adjustable Light Settings	Tri-Color* White	120/125V		 , RoHS

Note: Wall plates sold separately.

radiant with Netatmo

Control lights and power, from anywhere, with the ultra-reliable smart lighting solution optimized for whole-home use. Works with Amazon Alexa, Google Home and Apple HomeKit. Compatible with adorene with Netatmo.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	COMPATIBLE LOADS	COMPLIANCE
Smart Gateway with Netatmo 	WNRH1WH WNRH1LA WNRH1NI	Creates a robust and dedicated network as the foundation of the Netatmo smart lighting solution.	White Light Almond Nickel			 , RoHS
Smart Surface-Mount Gateway with Netatmo 	WNRH2WH WNRH2LA WNRH2NI	Creates a robust and dedicated network as the foundation of the Netatmo smart lighting solution. Installs beside an outlet or switch.	White Light Almond Nickel			 , RoHS
Smart Switch with Netatmo 	WNRL10WH WNRL10LA WNRL10NI	Control lights from anywhere. Gateway required.	White Light Almond Nickel	15A, 120V		 , RoHS
Smart Tru-Universal Dimmer with Netatmo 	WNRL50WH WNRL50LA WNRL50NI	The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V).	White Light Almond Nickel	15A, 120V	Incandescent, Halogen & ELV: 700W, MLV: 500VA, LED/ CFL: 450W (not compatible with 0-10V LED drivers), EFL: 5.5A	 , RoHS
Wireless Smart Switch with Netatmo 	WNRL23WH WNRL23LA WNRL23NI	Can be added to any wall or surface for easy 3-way control, no wiring required. Must be paired with a Smart Switch with Netatmo. Battery-operated.	White Light Almond Nickel			 , RoHS
Wireless Smart Dimmer with Netatmo 	WNRL63WH WNRL63LA WNRL63NI	Can be added to any wall or surface for easy 3-way dimming control, no wiring required. Must be paired with a Smart Tru-Universal Dimmer with Netatmo. Battery-operated.	White Light Almond Nickel			 , RoHS

Note: Wall plates included with all radiant with Netatmo products.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA/COMPATIBLE LOADS	COMPLIANCE
Home/Away Wireless Smart Switch with Netatmo 	WNRL33WH WNRL33LA WNRL33NI	Controls a scene of multiple lights, turning the lights on (or off), simultaneously, with just a single touch. Add to any wall or surface, no wiring required. Battery-operated.	White Light Almond Nickel			 , RoHS
Wake/Sleep Wireless Smart Switch with Netatmo 	WNRL43WH WNRL43LA WNRL43NI	Controls a scene of multiple lights, turning the lights on (or off), simultaneously, with just a single touch. Add to any wall or surface, no wiring required. Battery-operated.	White Light Almond Nickel			 , RoHS
Smart Outlet with Netatmo 	WNRR15WH WNRR15LA WNRR15NI WNRR20WH WNRR20LA WNRR20NI	Control power from anywhere. One outlet is app-controlled, the other is always on. Gateway required.	White Light Almond Nickel White Light Almond Nickel	15A, 125V, TR 20A, 125V, TR	5-15R 5-20R	 , RoHS
Smart Plug-In Switch with Netatmo 	WNP10	Plug-in to an existing outlet for smart control of lamps and small appliances, no installation required.	White			 , RoHS
Smart Plug-In Tru-Universal Dimmer with Netatmo 	WNP20	Plug into an existing outlet to gain smart dimming control. The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V).	White		Incandescent, Halogen & ELV: 700W, MLV: 500VA, LED/ CFL: 450W (not compatible with 0-10V LED drivers), EFL: 5.5A	 , RoHS
Smart Switch Starter Kit with Netatmo 	WNRH10KITWH WNRH10KITLA WNRH10KITNI	Kit includes (1) Smart Switch with Netatmo, (1) Smart Surface-Mount Gateway with Netatmo, (1) Home/Away Wireless Smart Switch with Netatmo	White Light Almond Nickel	15A, 120V		 , RoHS
Smart Outlet Starter Kit with Netatmo 	WNRH15KITWH WNRH15KITLA WNRH15KITNI	Kit includes (1) 15A Smart Outlet with Netatmo, (1) Smart Surface-Mount Gateway with Netatmo, (1) Home/Away Wireless Smart Switch with Netatmo	White Light Almond Nickel	15A, 125V, TR		 , RoHS

Note: Wall plates included with all radiant with Netatmo products.

radiant with Wi-Fi

Control lights and power from anywhere with the Smart Lights, Wi-Fi app. Connect directly to Wi-Fi for fast, easy setup in one or a few rooms. Create groups and scenes, or easily set automated schedules. Works with Amazon Alexa and Google Home.

NAME	PART NUMBER	DESCRIPTION	COLOR/FINISH	RATING	NEMA/COMPATIBLE LOADS	COMPLIANCE
Smart Tru-Universal Dimmer, with Wi-Fi 	WWRL50WHCCV2 WWRL50LACCV2 WWRL50NICCV2	Controls lights from anywhere with the Smart Lights, Wi-Fi app. Create groups and scenes, or easily set automated schedules. The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V).	White Light Almond Nickel	120V	Incandescent, Halogen & ELV: 700W, MLV: 500VA, LED/CFL: 450W (not compatible with 0-10V LED drivers), EFL: 5.5A	 , RoHS
Smart Switch, with Wi-Fi 	WWRL10WHCCV2 WWRL10LACCV2 WWRL10NICCV2	Controls lights from anywhere with the Smart Lights, Wi-Fi app. Create groups and scenes, or easily set automated schedules. Easily replaces an existing switch. Uses existing secure home Wi-Fi (WPA2) and connects to Amazon Alexa or Google Home for added voice control.	White Light Almond Nickel	15A, 120V		 , RoHS
Smart Outlet, with Wi-Fi 	WWRR15WHCCV2 WWRR15LACCV2 WWRR15NICCV2	Control lamps, appliances and more, from anywhere. Installs easily in place of an existing outlet, neutral wire required. One outlet is Wi-Fi controlled, the other is always on.	White Light Almond Nickel	15A, 125V, TR	5-15R	 , RoHS
Smart Plug-In Dimmer, with Wi-Fi 	WWP20CCV2	Plugs in to enable smart control of table and floor lamps. The simplest solution to every dimming need, this dimmer self-calibrates to work with dimmable bulbs & loads (except 0-10V).	White	120V	5-15R Incandescent, Halogen & ELV: 700W, MLV: 500VA, LED/CFL: 450W (not compatible with 0-10V LED drivers), EFL: 5.5A	 , RoHS
Smart Plug-In Switch, with Wi-Fi 	WWP10CCV2	Plugs in to enable smart control of lamps and small appliances.	White	120V	5-15R	 , RoHS
Smart Outdoor Switch with GFCI, with Wi-Fi 	WWP30CCV2	Plugs in to enable smart control of outdoor lights, fountains, decorations and more, while also offering ground-fault protection for additional safety. Controls up to three separate lights or devices.	Black	120V	5-15R	 , RoHS

Note: Wall plates included with all radiant with Wi-Fi products.


Screwless Wall Plates

How to build a better wall plate? Try clean lines and a low profile with no screws in sight.

NAME	GANGS	PART NUMBER	NAME	GANGS	PART NUMBER
Black 	1-Gang 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	RWP26BK RWP262BK RWP263BK RWP264BK RWP265BK RWP266BK	Ivory 	1-Gang 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	RWP26I RWP262I RWP263I RWP264I RWP265I RWP266I
Brown 	1-Gang 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	RWP26 RWP262 RWP263 RWP264 RWP265 RWP266	Light Almond 	1-Gang 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	RWP26LA RWP262LA RWP263LA RWP264LA RWP265LA RWP266LA
Gray 	1-Gang 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	RWP26GRY RWP262GRY RWP263GRY RWP264GRY RWP265GRY RWP266GRY	White 	1-Gang 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	RWP26W RWP262W RWP263W RWP264W RWP265W RWP266W

Metallic Screwless Wall Plates

NAME	GANGS	PART NUMBER	NAME	GANGS	PART NUMBER
Dark Bronze 	1-Gang 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	RWP26DBCC6 RWP262DBCC6 RWP263DBCC6 RWP264DB RWP265DB RWP266DB	Nickel 	1-Gang 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	RWP26NICC6 RWP262NICC6 RWP263NICC6 RWP264NI RWP265NI RWP266NI
Graphite 	1-Gang 2-Gang 3-Gang 4-Gang 5-Gang 6-Gang	RWP26GCC6 RWP262GCC6 RWP263GCC6 RWP264CC6 RWP265G RWP266G			



adorne Dimensions

NAME	PART NUMBER	DIMENSIONS (H x W x D)	NAME	PART NUMBER	DIMENSIONS (H x W x D)
Paddle Switch	ASPD1531W4	1.77" x 1.77" x 1.5"	Push Switch	ASPU1532W4	1.77" X 1.77" x 1.82"
	ASPD1532M4			ASPU1532M4	
	ASPD1532G4				
	ASPD2032W4	1.77" x 1.77" x 1.59"		ASOS32W4	2.66" x 1.77" x 1.85"
	ASPD2032M4			ASOS32M4	
Paddle Dimmer	ASPD2032G4		SensaSwitch, Auto-ON/ Auto-OFF	ASOS32G4	
	ASPD2042W4	1.77" x 1.77" x 1.72"			
	ASPD2042M4			ASVS12W4	2.66" x 1.77" x 1.85"
	ASPD2042G4			ASVS12M4	
				ASVS12G4	
Paddle Switch, Half-Size	ADPD703HW4	4.20" x 1.77" x 1.62"	SensaSwitch, Manu- al-ON/Auto-OFF	ASTM2W2	2.66" x 1.77" x 1.85"
	ADPD703HM4			ASTM2M2	
	ADPD703HG4	4.20" x 2.51" x 1.62"		ASTM2G2	
	ADPD1103HW4				
	ADPD1103HM2	4.20" x 1.77" x 1.62"		ADSM703HW2	4.20" x 1.77" x 1.85"
Paddle Fan Speed Control	ADPD453LW2		SensaDimmer, Auto-ON/ Auto-OFF	ADSM703HM2	
	ADPD453LM2			ADSM703HG2	
	ADPD453LG2				
				ASWV1532W2	2.66" x 1.77" x 1.71"
				ASWV1532M2	
Whisper Switch	ASPD1531W4	1.77" x 0.89" x 1.5"	Wave Switch	ASWV1532G2	
	ASPD1531M4				
	ASPD1531G4				
				ASTH1532W2	2.66" x 1.77" x 1.63"
				ASTH1532M2	
Whisper Wi-Fi Ready Switch	AAFN4S16AW4	2.66" x 1.77" x 1.85"	Touch Switch	ASTH1532G2	
	AAFN4S16AM4				
	AAFN4S16AG4				
				ASTH155RMW1	2.66" x 1.77" x 1.63"
				ASTH155RMM1	
Whisper Dimmer	ASWR1532W4	1.77" X 1.77" x 1.63"	Touch Wi-Fi Ready Dimmer	ASTH155RMG1	
	ASWR1532M4			ASTHRRW1	2.66" x 1.77" x 1.63"
	ASWR1532G4			ASTHRRM1	
				ASTHRRG1	
Whisper Wi-Fi Ready Dimmer	ASWRRRW1	1.77" X 1.77" x 1.63"	Blank, Half-Size	ADTH700MMUW2	4.20" x 1.77" x 1.79"
	ASWRRRM1			ADTH700MMUM2	
	ASWRRRG1			ADTHMRUW2	4.20" x 1.77" x 1.79"
	ASWR155RMW1	1.77" X 1.77" x 1.63"		ADTHMRUM2	
	ASWR155RMM1			ADTH700RMHW1	4.20" x 1.77" x 1.79"
sofTap Switch	ADWR703HW4	4.20" x 1.77" x 1.77"	Tamper-Resistant Outlet	ADTH700RMHM1	
	ADWR703HM4			ADTH700RMUW1	
	ADWR1103HW4	4.20" x 2.51" x 1.77"		ADTH700RMUM1	
	ADWR1103HM4			ADTHRRW1	
				ADTHRRM1	
sofTap Dimmer	ADWR600RMHW1	4.20" x 1.77" x 1.79"	Tamper-Resistant GFCI	ADTHRRM1	
	ADWR600RHM1				
	ADWR700RMTUW1	4.20" x 1.77" x 1.79"			
	ADWR700RMTUM1				
	ADWR700RMTUG1	4.20" x 1.77" x 1.79"			
sofTap Wi-Fi Ready Switch	ADWRRRW1		Energy-Saving ON/OFF Outlet	ARPS152W4	2.66" x 1.77" x 1.73"
	ADWRRRM1			ARPS152M4	
	ADWRRRG1			ARPS152G4	
sofTap Wi-Fi Ready Dimmer	ASTP1532W4	2.66" x 1.77" x 1.63"	Wi-Fi Ready Outlet	ARPS15RF2W4	2.66" x 1.76" x 1.82"
	ASTP1532M4			ARPS15RF2M4	
	ASTP1532G4			ARPS15RF2G4	
sofTap Wi-Fi Ready Dimmer	ADTP703HW2	4.20" x 1.77" x 1.79"	USB Outlet, Half-Size	ARUSBW4	1.77" X 0.89" x 1.81"
	ADTP703HM2				
	ADTP1103HW4	4.20" x 2.51" x 1.79"			
	ADTP1103HM4				
	ADTP703UW2	4.20" x 1.77" x 1.79"			
sofTap Wi-Fi Ready Switch	ADTP703UM2		Energy-Saving ON/OFF Outlet	ARPS152W4	2.66" x 1.77" x 1.73"
				ARPS152M4	
				ARPS152G4	
sofTap Wi-Fi Ready Dimmer	ASTPRF2W2	2.66" x 1.77" x 1.63"	Wi-Fi Ready Outlet	ARPS15RF2W4	2.66" x 1.76" x 1.82"
	ASTPRF2M2			ARPS15RF2M4	
	ASTPRFR2W2	2.66" x 1.77" x 1.63"		ARPS15RF2G4	
	ASTPRFR2M2				
sofTap Wi-Fi Ready Switch	ASTP155RMW1	2.66" x 1.77" x 1.63"	USB Outlet, Half-Size	ARUSBW4	1.77" X 0.89" x 1.81"
	ASTP155RMM1				
	ASTPRRW1	2.66" x 1.77" x 1.63"			
	ASTPRRM1				
sofTap Wi-Fi Ready Dimmer	ADTP700MMUW2	4.20" x 1.77" x 1.79"	Wi-Fi Ready Outlet	ARPS15RF2W4	2.66" x 1.76" x 1.82"
	ADTP700MMUM2			ARPS15RF2M4	
	ADTP700MMHW2	4.20" x 1.77" x 1.79"		ARPS15RF2G4	
	ADTP700MMHM2				
	ADTPMRUW2	4.20" x 1.77" x 1.79"			
sofTap Wi-Fi Ready Dimmer	ADTPMRUM2		USB Outlet, Half-Size	ARUSBW4	1.77" X 0.89" x 1.81"
sofTap Wi-Fi Ready Switch	ADTP700RMHW1	4.20" x 1.77" x 1.79"	Energy-Saving ON/OFF Outlet	ARPS152W4	2.66" x 1.77" x 1.73"
	ADTP700RMHM1			ARPS152M4	
	ADTP700RMUW1	4.20" x 1.77" x 1.79"		ARPS152G4	
	ADTP700RMUM1				
	ADTPRRW1	4.20" x 1.77" x 1.79"			
sofTap Wi-Fi Ready Dimmer	ADTPRRM1		Wi-Fi Ready Outlet	ARPS15RF2W4	2.66" x 1.76" x 1.82"
	ADTP1532G4			ARPS15RF2M4	
				ARPS15RF2G4	

NUMERICAL

8851	69
885TR	69
885TRBK	69
885TRDBCC12	69
885TRGCC12	69
885TRGRY	69
885TRI	69
885TRLA	69
885TRNICC12	69
885TRW	56, 69
885TRWRI	69
885TRWRLA	69
885TRWRW	57, 69
1597	70
1597BK	70
1597GRY	24
1597I	70
1597LA	70
1597NTLTRABCC4	70
1597NTLTRBKCC4	70
1597NTLTRDBCC4	70
1597NTLTRI	70
1597NTLTRICC4	70
1597NTLTRLA	70
1597NTLTRLACC4	70
1597NTLTRNICC4	70
1597NTLTRW	70
1597NTLTRWCC4	70
1597NTLW	61, 70
1597SWTTRBKCC4	70
1597SWTTRICC4	70
1597SWTTRLACC4	70
1597SWTTRWCC4	70
1597TR	70
1597TRA	70
1597TRABK	70
1597TRAI	70
1597TRALA	70
1597TRAU	70
1597TRBK	70
1597TRDBCC4	70
1597TRGCC4	70
1597TRGRY	70
1597TRI	70
1597TRLA	70
1597TRNI	70
1597TRNICC4	70
1597TRW	56, 70
1597TRWR	70
1597TRWRBK	70
1597TRWRGRY	70
1597TRWRI	70
1597TRWRLA	70
1597TRWRW	70
1597W	70
1597TRUSBAA	74
1597TRUSBAABK	74

1597TRUSBAADB	74
1597TRUSBAAG	74
1597TRUSBAAGRY	74
1597TRUSBAAI	74
1597TRUSBAALA	74
1597TRUSBAANI	74
1597TRUSBAAW	74
1597TRUSBAC	74
1597TRUSBACBK	74
1597TRUSBACDB	74
1597TRUSBACG	74
1597TRUSBACGRY	74
1597TRUSBACI	74
1597TRUSBACLA	74
1597TRUSBACNI	74
1597TRUSBACW	56, 74
1597TRUSBCC	74
1597TRUSBCCBK	74
1597TRUSBCCDB	74
1597TRUSBCCG	74
1597TRUSBCCGRY	74
1597TRUSBCCI	74
1597TRUSBCCLA	74
1597TRUSBCCNI	74
1597TRUSBCCW	74
1597TRWRUSBACBK	74
1597TRWRUSBACGRY	74
1597TRWRUSBACI	74
1597TRWRUSBACLA	74
1597TRWRUSBACW	74
1597TRWRUSBCCBK	74
1597TRWRUSBACGRY	74
1597TRWRUSBACI	74
1597TRWRUSBACLA	74
1597TRWRUSBACW	74
2097NTLTRGRY	70
2097NTLTRI	70
2097NTLTRLA	70
2097NTLTRW	70
2097TR	70
2097TRBK	24
2097TRDB	70
2097TRG	70
2097TRGRY	70
2097TRI	70
2097TRLA	70
2097TRNI	70
2097TRW	70

A

AABK1G4	28
AABK1M4	28
AABK1W4	28
AAFN4S16AG4	16
AAFN4S16AM4	16
AAFN4S16AW4	8, 16
AALSL6	25
AALSL277	25

AANLM14	24
AANLM24	11, 24
AARNL2	11, 24
AC1PFM1	28
AC1PFW1	28
AC2PFM1	28
AC2PFW1	28
AC4PFM1	28
AC4PFW1	28
AC5ERJ45CM1	29
AC5ERJ45CW1	29
AC5ERJ45M1	29
AC5ERJ45W1	29
AC6RJ45M1	29
AC6RJ45W1	29
ACABPM1	29
ACABPW1	29
ACBLKM4	29
ACBLKW4	29
ACBRSTPM1	28
ACBRSTPW1	28
ACHDMIM1	29
ACHDMIW1	29
ACNRFCM1	29
ACNRFCW1	29
ACPRCAF1	29
ACPRCAF1	29
ACPRCAF1	29
ACRGRCAF1	29
ACRGRCAF1	29
ACR25M1	29
ACR25W1	29
ACSSIM1	29
ACSSI1	29
ACYRCAF1	29
ACYRCAF1	29
AD1-RU-M	23
AD1-RU-W	23
AD2-2UR-M	23
AD2-2UR-W	23
AD2-Z-M	23
AD2-Z-W	23
AD3-R2UR-M	23
AD3-R2UR-W	23
AD3-ZR-W	23
ADPD4FBL3P2G4	16
ADPD4FBL3P2G4 (0-10V)	16
ADPD4FBL3P2M4	16
ADPD4FBL3P2M4 (0-10V)	16
ADPD4FBL3P2W4	16
ADPD4FBL3P2W4 (0-10V)	16
ADPD453LG2	16
ADPD453LM2	16, 47, 49
ADPD453LW2	16
ADPD703HG4	16
ADPD703HM4	16
ADPD703HW4	16
ADPD1103HM2	16
ADPD1103HW4	16

ADSM703HG2.....	19
ADSM703HM2.....	19
ADSM703HW2.....	19
ADTH4FBL3PG4.....	18
ADTH4FBL3PG4 (0-10V).....	18
ADTH4FBL3PM4.....	18
ADTH4FBL3PW4.....	18
ADTH703TUG4.....	18
ADTH703TUM4.....	18
ADTH703TUW4.....	18
ADTP4FBL3PG4.....	18
ADTP4FBL3PM4.....	18
ADTP4FBL3PW4.....	18
ADTP703HM2.....	18
ADTP703HW2.....	8, 18
ADTP703TUG4.....	18
ADTP703TUM4.....	18
ADTP703TUW4.....	9, 18
ADTP1103HM4.....	18
ADTP1103HW4.....	18
ADWR703HM4.....	17
ADWR703HW4.....	17
ADWR703TUG4.....	17
ADWR703TUM4.....	17
ADWR703TUW4.....	17
ADWR1103HM4.....	17
ADWR1103HW4.....	17
AF1G.....	41
AF2G.....	41
AF3G.....	41
AF4G.....	41
AF5G.....	41
AF6G.....	41
AF152TR.....	71
AF152TRBK.....	71
AF152TRGRY.....	71
AF152TRI.....	71
AF152TRLA.....	71
AF152TRW.....	71
AF202DFI.....	71
AF202DFLA.....	71
AF202DFW.....	71
AF202TR.....	71
AF202TRBK.....	71
AF202TRGRY.....	71
AF202TRI.....	71
AF202TRLA.....	71
AF202TRW.....	71
AFGF152TR.....	71
AFGF152TRBK.....	71
AFGF152TRGRY.....	71
AFGF152TRI.....	71
AFGF152TRLA.....	71
AFGF152TRW.....	71
AFGF202DFI.....	71
AFGF202DFLA.....	71
AFGF202DFW.....	71
AFGF202TR.....	71

AFGF202TRBK.....	71
AFGF202TRGRY.....	71
AFGF202TRI.....	71
AFGF202TRLA.....	71
AFGF202TRW.....	71
AGFTR2152G4.....	20
AGFTR2152M4.....	20
AGFTR2152W4.....	10, 20
AGFTR2153G4.....	20
AGFTR2153M4.....	20
AGFTR2153W4.....	20
AGFTR2202G4.....	20
AGFTR2202M4.....	20
AGFTR2202W4.....	20
ALEXTLEDTM4.....	50
ALLNLEDTM4.....	50
ALSJC8M4.....	50
ALSJC8TM4.....	50
ALSLDR30TM1.....	50
ALSLDR30W1.....	50
ALSLDR60TM1.....	50
ALSLDR60W1.....	50
ALSLJC8W4.....	50
ALSLJC14TM4.....	50
ALSLJC14W4.....	50
ALSLLED6TM4.....	50
ALSLLED6W4.....	50
ALSLLED12TM4.....	50
ALSLLED12W4.....	50
ALSLPC36TM4.....	50
ALSLPC36W4.....	50
ALSLTTM4.....	50
ALSLTW4.....	50
APCB1TM4.....	49
APCB1W4.....	49
APCB4TM1.....	49
APCB4W1.....	49
APCB5TM1.....	49
APCB5W1.....	49
APCB6TM2.....	49
APCB6W2.....	49
APCCTM4.....	48
APCCW4.....	48
APDWCTM1.....	49
APDWCW1.....	49
APME18TM2.....	48
APME18W2.....	48
APMT12TM2.....	48
APMT12W2.....	48
APMT18TM4.....	48
APMT18W4.....	48
APMT27TM2.....	48
APMT27W2.....	48
APMTPROTM1.....	48
APST9TM1.....	48
APST9W1.....	48
ARCD152G10.....	20
ARCD152G10.....	20

ARCD152W10.....	20
ARCD202M10.....	20
ARCD202W10.....	20
ARCH152G10.....	20
ARCH152M10.....	20
ARCH152W10.....	20
ARPS152G4.....	20
ARPS152M4.....	20
ARPS152W4.....	10, 20
ARPTR151GG2.....	22
ARPTR151GM2.....	22
ARPTR151GW2.....	11, 22
ARPTR152GG2.....	22
ARPTR152GM2.....	22
ARPTR152GW2.....	22
ARPTR201GG2.....	22
ARPTR201GM2.....	22
ARPTR201GW2.....	22
ARTR152G4.....	20
ARTR152M4.....	20
ARTR152W4.....	10, 20
ARTR153G4.....	20
ARTR153M4.....	20
ARTR153W4.....	20
ARTR202G4.....	22
ARTR202M4.....	20
ARTR202W4.....	20
ARTRUSB153G4.....	21
ARTRUSB153M4.....	21
ARTRUSB153M4WP.....	21
ARTRUSB153W4.....	12, 21
ARTRUSB156ACM4.....	21
ARTRUSB156ACW4.....	12, 21
ARTRUSB156ACG4.....	21
ARTRUSB15PD30G4.....	21
ARTRUSB15PD30M4.....	21
ARTRUSB15PD30W4.....	12, 21
ARTRUSB206ACM4.....	21
ARTRUSB206ACW4.....	21
ARTRUSB206ACG4.....	21
ARTRUSB20PD30G4.....	21
ARTRUSB20PD30M4.....	21
ARTRUSB20PD30W4.....	21
ARUSB2AA6M4.....	21
ARUSB2AA6W4.....	21
ARUSB2AA6G4.....	21
ARUSB2AC6M4.....	21
ARUSB2AC6W4.....	12, 21
ARUSB2AC6G4.....	21
ARUSBG4.....	21
ARUSBM4.....	21
ARUSBW4.....	12, 21
ARUSB30PDG4.....	21
ARUSB30PDM4.....	21
ARUSB30PDW4.....	21
ASOS32G4.....	19
ASOS32M4.....	19
ASOS32W4.....	19

ASPD1531G4.....	16
ASPD1531G277.....	16
ASPD1531M4.....	16
ASPD1531M277.....	16
ASPD1531W4.....	16
ASPD1531W277.....	16
ASPD1532G4.....	16
ASPD1532G277.....	16
ASPD1532M4.....	16
ASPD1532M277.....	16
ASPD1532W4.....	8, 16
ASPD1532W277.....	16
ASPD1542G277.....	16
ASPD1542M277.....	16
ASPD1542W277.....	16
ASPD2032G4.....	16
ASPD2032M4.....	16
ASPD2032W4.....	16
ASPD2042G4.....	16
ASPD2042M4.....	16
ASPD2042W4.....	16
ASPU1532M4.....	17
ASPU1532W4.....	17
ASTH1532G2.....	18
ASTH1532M2.....	18
ASTH1532W2.....	9, 18
ASTM2G2.....	19
ASTM2M2.....	19
ASTM2W2.....	19
ASTP1532G4.....	18
ASTP1532M4.....	18
ASTP1532W4.....	18
ASVS12G4.....	19
ASVS12M4.....	19
ASVS12W4.....	19
ASWR1532G4.....	17
ASWR1532M4.....	17
ASWR1532W4.....	17
ASWV1532G2.....	17
ASWV1532M2.....	17
ASWV1532W2.....	9, 17
AWC1G2BBN4.....	37
AWC1G2BLN4.....	37
AWC1G2BS4.....	37
AWC1G2BSB4.....	37
AWC1G2COF4.....	37
AWC1G2MAC4.....	37
AWC1G2OB4.....	37
AWC1G2SBL4.....	37
AWC1G2SN4.....	37
AWC1G3BBN4.....	37
AWC1G3BLN4.....	37
AWC1G3BS4.....	37
AWC1G3BSB4.....	37
AWC1G3COF4.....	37
AWC1G3MAC4.....	37
AWC1G3OB4.....	37
AWC1G3SBL4.....	37

AWC1G3SN4.....	37
AWC2GBBN4.....	37
AWC2GBLN4.....	37
AWC2GBS4.....	37
AWC2GBSB4.....	37
AWC2GCOF4.....	37
AWC2GMAC4.....	37
AWC2GOB4.....	37
AWC2GSBL4.....	37
AWC2GSN4.....	37
AWC3GBBN4.....	37
AWC3GBLN4.....	37
AWC3GBS4.....	37
AWC3GBSB4.....	37
AWC3GCOF4.....	37
AWC3GMAC4.....	37
AWC3GOB4.....	37
AWC3GSBL4.....	37
AWC3GSN4.....	37
AWC4GBBN4.....	37
AWC4GBLN4.....	37
AWC4GBS4.....	37
AWC4GBSB4.....	37
AWC4GCOF4.....	37
AWC4GMAC4.....	37
AWC4GOB4.....	37
AWC4GSBL4.....	37
AWC4GSN4.....	37
AWM1G2BLS4.....	35
AWM1G2CU4.....	35
AWM1G2HFBR4.....	37
AWM1G2HFBS4.....	37
AWM1G2HFFE4.....	37
AWM1G2M4.....	35
AWM1G2MA4.....	35
AWM1G2MB4.....	35
AWM1G2MR4.....	35
AWM1G2MS4.....	35
AWM1G2MW4.....	35
AWM1G2MWW4.....	35
AWM1G2RG4.....	35
AWM1G2SL4.....	35
AWM1G2SP4.....	35
AWM1G2TL4.....	35
AWM1G2W4.....	35
AWM1G3BLS4.....	35
AWM1G3CU4.....	35
AWM1G3HFBR1.....	37
AWM1G3HFFE1.....	37
AWM1G3M4.....	35
AWM1G3MA4.....	35
AWM1G3MB4.....	35
AWM1G3MR4.....	35
AWM1G3MS4.....	35
AWM1G3MWW4.....	35
AWM1G3RG4.....	35
AWM1G3SL4.....	35

AWM1G3SP4.....	35
AWM1G3TL4.....	35
AWM1G3W4.....	35
AWM2GBLS4.....	35
AWM2GCU4.....	35
AWM2GHFBR1.....	37
AWM2GHFFE1.....	37
AWM2GM4.....	35
AWM2GMA4.....	35
AWM2GMB4.....	35
AWM2GMR4.....	35
AWM2GMS4.....	35
AWM2GMW4.....	35
AWM2GMWW4.....	35
AWM2GRG4.....	35
AWM2GSL4.....	35
AWM2GSP4.....	35
AWM2GTL4.....	35
AWM2GW4.....	35
AWM3GBLS4.....	35
AWM3GCU4.....	35
AWM3GHFBR1.....	37
AWM3GHFFE1.....	37
AWM3GM4.....	35
AWM3GMA4.....	35
AWM3GMB4.....	35
AWM3GMR4.....	37
AWM3GMS4.....	35
AWM3GMW4.....	35
AWM3GMWW4.....	35
AWM3GRG4.....	35
AWM3GSL4.....	35
AWM3GSP4.....	35
AWM3GTL4.....	35
AWM3GW4.....	35
AWM4GBLS4.....	35
AWM4GCU4.....	35
AWM4GHFBR1.....	37
AWM4GHFFE1.....	37
AWM4GM4.....	35
AWM4GMA4.....	35
AWM4GMB4.....	35
AWM4GMR4.....	35
AWM4GMS4.....	35
AWM4GMW4.....	35
AWM4GMWW4.....	35
AWM4GRG4.....	35
AWM4GSL4.....	35
AWM4GSP4.....	35
AWM4GTL4.....	35
AWM4GW4.....	35
AWP1G2BL6.....	39
AWP1G2BN4.....	39
AWP1G2BR6.....	39
AWP1G2CA4.....	39
AWP1G2GG4.....	39
AWP1G2GR6.....	39
AWP1G2GS4.....	39

AWP1G2HB4	39	AWP4GGG4.....	39
AWP1G2LA6.....	39	AWP4GGR4.....	39
AWP1G2MG6.....	39	AWP4GGS4.....	39
AWP1G2NK4	39	AWP4GHB4.....	39
AWP1G2PW4	39	AWP4GLA4.....	39
AWP1G2TM6.....	39	AWP4GMG4.....	39
AWP1G2WH6.....	39	AWP4GNK4.....	39
AWP1G2WHW10.....	39	AWP4GPW4.....	39
AWP1G3BL4.....	39	AWP4GTM4.....	39
AWP1G3BN4.....	39	AWP4GWH4.....	39
AWP1G3BR4.....	39	AWP4GWHW4.....	39
AWP1G3CA4.....	39	AWP5GBL1.....	39
AWP1G3GG4.....	39	AWP5GBN1.....	39
AWP1G3GR4.....	39	AWP5GBR1.....	39
AWP1G3GS4.....	39	AWP5GCA1.....	39
AWP1G3HB4.....	39	AWP5GGG1.....	39
AWP1G3LA4.....	39	AWP5GGR1.....	39
AWP1G3MG4.....	39	AWP5GGS1.....	39
AWP1G3NK4.....	39	AWP5GHB1.....	39
AWP1G3PW4.....	39	AWP5GMG1.....	39
AWP1G3TM4.....	39	AWP5GNK1.....	39
AWP1G3WH4.....	39	AWP5GPW1.....	39
AWP1G3WHW4.....	39	AWP5GTM1.....	39
AWP2GBL4.....	39	AWP5GWH1.....	39
AWP2GBN4.....	39	AWP5GWHW1.....	39
AWP2GBR4.....	39	AWP6GBL1.....	39
AWP2GCA4.....	39	AWP6GBN1.....	39
AWP2GGG4.....	39	AWP6GBR1.....	39
AWP2GGR4.....	39	AWP6GCA1.....	39
AWP2GGS4.....	39	AWP6GGG1.....	39
AWP2GHB4.....	39	AWP6GGR1.....	39
AWP2GLA4.....	39	AWP6GGS1.....	39
AWP2GMG4.....	39	AWP6GHB1.....	39
AWP2GNK4.....	39	AWP6GMG1.....	39
AWP2GPW4.....	39	AWP6GNK1.....	39
AWP2GTM4.....	39	AWP6GPW1.....	39
AWP2GWH4.....	39	AWP6GTM1.....	39
AWP2GWHW10.....	39	AWP6GWH1.....	39
AWP3GBL4.....	39	AWP6GWHW1.....	39
AWP3GBN4.....	39		
AWP3GBR4.....	39	D	
AWP3GCA4.....	39	DQFF15UBK	22
AWP3GGG4.....	39	DQFF15UST	22
AWP3GGR4.....	39	DQFP15BK.....	22
AWP3GGS4.....	39	DQFP15ST	22
AWP3GHB4.....	39	DQFP15UBK.....	22
AWP3GLA4.....	39	DQFP15UST.....	22
AWP3GMG4.....	39		
AWP3GNK4.....	39	H	
AWP3GPW4.....	39	HCL453PMMTC.....	65
AWP3GTM4.....	39	HCL453PMMW	54, 65
AWP3GWH4.....	39	HMKIT	65
AWP3GWHW4.....	39	HMKITBK.....	65
AWP4GBL4.....	39	HMKITDB.....	65
AWP4GBN4.....	39	HMKITGRY.....	65
AWP4GBR4.....	39	HMKITI.....	65
AWP4GCA4.....	39	HMKITLA.....	65

AWP4GGR4.....	39	AWP4GGS4.....	39
AWP4GHB4.....	39	AWP4GLA4.....	39
AWP4GLA4.....	39	AWP4GMG4.....	39
AWP4GMG4.....	39	AWP4GNK4.....	39
AWP4GNK4.....	39	AWP4GPW4.....	39
AWP4GPW4.....	39	AWP4GTM4.....	39
AWP4GTM4.....	39	AWP4GWH4.....	39
AWP4GWH4.....	39	AWP4GWHW4.....	39
AWP4GWHW4.....	39	AWP5GBL1.....	39
AWP5GBL1.....	39	AWP5GBN1.....	39
AWP5GBN1.....	39	AWP5GBR1.....	39
AWP5GBR1.....	39	AWP5GCA1.....	39
AWP5GCA1.....	39	AWP5GGG1.....	39
AWP5GGG1.....	39	AWP5GGR1.....	39
AWP5GGR1.....	39	AWP5GGS1.....	39
AWP5GGS1.....	39	AWP5GHB1.....	39
AWP5GHB1.....	39	AWP5GMG1.....	39
AWP5GMG1.....	39	AWP5GNK1.....	39
AWP5GNK1.....	39	AWP5GPW1.....	39
AWP5GPW1.....	39	AWP5GTM1.....	39
AWP5GTM1.....	39	AWP5GWH1.....	39
AWP5GWH1.....	39	AWP5GWHW1.....	39
AWP5GWHW1.....	39	AWP6GBL1.....	39
AWP6GBL1.....	39	AWP6GBN1.....	39
AWP6GBN1.....	39	AWP6GBR1.....	39
AWP6GBR1.....	39	AWP6GCA1.....	39
AWP6GCA1.....	39	AWP6GGG1.....	39
AWP6GGG1.....	39	AWP6GGR1.....	39
AWP6GGR1.....	39	AWP6GGS1.....	39
AWP6GGS1.....	39	AWP6GHB1.....	39
AWP6GHB1.....	39	AWP6GMG1.....	39
AWP6GMG1.....	39	AWP6GNK1.....	39
AWP6GNK1.....	39	AWP6GPW1.....	39
AWP6GPW1.....	39	AWP6GTM1.....	39
AWP6GTM1.....	39	AWP6GWH1.....	39
AWP6GWH1.....	39	AWP6GWHW1.....	39
AWP6GWHW1.....	39		
		D	
		DQFF15UBK	22
		DQFF15UST	22
		DQFP15BK.....	22
		DQFP15ST	22
		DQFP15UBK.....	22
		DQFP15UST.....	22
		H	
		HCL453PMMTC.....	65
		HCL453PMMW	54, 65
		HMKIT	65
		HMKITBK.....	65
		HMKITDB.....	65
		HMKITGRY.....	65
		HMKITI.....	65
		HMKITLA.....	65

HMKITNI.....	65	HMKITW	65
HMKITW	65	HMRKIT.....	65
HMRKIT.....	65	HMRKITBK.....	65
HMRKITBK.....	65	HMRKITDB.....	65
HMRKITDB.....	65	HMRKITGRY.....	65
HMRKITGRY.....	65	HMRKITI.....	65
HMRKITI.....	65	HMRKITLA.....	65
HMRKITLA.....	65	HMRKITNI.....	65
HMRKITNI.....	65	HMRKITW	65
HMRKITW	65	HMRTC.....	65
HMRTC.....	65	HMRW	65
HMRW	65		
		N	
		NTL873BKCC6.....	75
		NTL873ICC6.....	75
		NTL873LACC6.....	75
		NTL873NICC6.....	75
		NTL873WCC6.....	75
		NTL885TRBKCC6.....	75
		NTL885TRICC6.....	75
		NTL885TRLACC6.....	75
		NTL885TRNICC6.....	75
		NTL885TRW.....	61, 75
		NTL885TRWCC6.....	75
		NTLFULLTC.....	75
		NTLFULLTCCC6.....	75
		NTLFULLW.....	60, 75
		NTLFULLWCC6.....	75
		NTLHORZTCCC6.....	75
		NTLHORZWCC6.....	75
		R	
		R26USBAC6BK.....	73
		R26USBAC6DBCCV4.....	73
		R26USBAC6G.....	73
		R26USBAC6I.....	73
		R26USBAC6LA.....	73
		R26USBAC6NICCV4.....	73
		R26USBAC6W.....	59, 73
		R26USBACBK.....	72
		R26USBACDBCCV4.....	72
		R26USBACG.....	72
		R26USBACI.....	72
		R26USBACLA.....	72
		R26USBACNICC6.....	72
		R26USBACW.....	72
		R26USBC6DBCCV4.....	73
		R26USBC6BK.....	73
		R26USBC6G.....	73
		R26USBC6I.....	73
		R26USBC6LA.....	73
		R26USBC6NICCV4.....	73
		R26USBC6W.....	73
		R26USBCCBK.....	72
		R26USBCCBCCV4.....	72
		R26USBCCG.....	72

R26USBCCI.....	72	R26USBCCLA.....	72
R26USBCCLA.....	72	R26USBCCNICC6.....	72
R26USBCCNICC6.....	72	R26USBCCW.....	72
R26USBCCW.....	72	R26USBD.....	73
R26USBD.....	73	R26USBDDBK.....	73
R26USBDDBK.....	73	R26USBDDBCC6.....	73
R26USBDDBCC6.....	73	R26USBDGCC6.....	73
R26USBDGCC6.....	73	R26USBDGRY.....	73
R26USBDGRY.....	73	R26USBDI.....	73
R26USBDI.....	73	R26USBDLA.....	73
R26USBDLA.....	73	R26USBDNICC6.....	73
R26USBDNICC6.....	73	R26USBDW.....	58, 73
R26USBDW.....	58, 73	RCD11.....	67
RCD11.....	67	RCD11BKCC6.....	67
RCD11BKCC6.....	67	RCD11GRY.....	67
RCD11GRY.....	67	RCD11I.....	67
RCD11I.....	67	RCD11LA.....	67
RCD11LA.....	67	RCD11W.....	67
RCD11W.....	67	RCD33BK.....	67
RCD33BK.....	67	RCD33GRY.....	67
RCD33GRY.....	67	RCD33I.....	67
RCD33I.....	67	RCD33LA.....	67
RCD33LA.....	67	RCD33W.....	67
RCD33W.....	67	RCD38GRY.....	67
RCD38GRY.....	67	RCD38TRBK.....	67
RCD38TRBK.....	67	RCD38TRI.....	67
RCD38TRI.....	67	RCD38TRLA.....	67
RCD38TRLA.....	67	RCD38TRW.....	57, 67
RCD38TRW.....	57, 67	RCD113.....	67
RCD113.....	67	RCD113BK.....	67
RCD113BK.....	67	RCD113GRY.....	67
RCD113GRY.....	67	RCD113I.....	67
RCD113I.....	67	RCD113LA.....	67
RCD113LA.....	67	RCD113W.....	55, 67
RCD113W.....	55, 67	RCDLM.....	67
RCDLM.....	67	RH4FBL3PTC.....	64
RH4FBL3PTC.....	64	RH4FBL3PW.....	64
RH4FBL3PW.....	64	RH703PDBCCV4.....	64
RH703PDBCCV4.....	64	RH703PNICCV4.....	64
RH703PNICCV4.....	64	RH703PTC.....	64
RH703PTC.....	64	RH703PTUTC.....	64
RH703PTUTC.....	64	RH703PTUW.....	54, 64
RH703PTUW.....	54, 64	RH703PW.....	64
RH703PW.....	64	RH1103PTC.....	64
RH1103PTC.....	64	RH1103PW.....	64
RH1103PW.....	64	RHCL453PDBCCV4.....	64
RHCL453PDBCCV4.....	64	RHCL453PGCCV4.....	64
RHCL453PGCCV4.....	64	RHCL453PNICCV4.....	64
RHCL453PNICCV4.....	64	RHCL453PTC.....	64
RHCL453PTC.....	64	RHCL453PW.....	64
RHCL453PW.....	64	RHDH163PBCCCV4.....	66
RHDH163PBCCCV4.....	66	RHDH163PGCCV4.....	66
RHDH163PGCCV4.....	66	RHDH163PTC.....	66
RHDH163PTC.....	66	RHDH163PW.....	66
RHDH163PW.....	66	RHFB83PTC.....	65
RHFB83PTC.....	65	RHFB83PW.....	65
RHFB83PW.....	65	RHKIT.....	65

RHKITBK.....	65	RHKITDB.....	65
RHKITDB.....	65	RHKITGRY.....	65
RHKITGRY.....	65	RHKITI.....	65
RHKITI.....	65	RHKITLA.....	65
RHKITLA.....	65	RHKITNI.....	65
RHKITNI.....	65	RHKITW.....	65
RHKITW.....	65	RHLV703PTC.....	65
RHLV703PTC.....	65	RHLV703PW.....	65
RHLV703PW.....	65	RHLV1103PTC.....	64
RHLV1103PTC.....	64	RHLV1103PW.....	64
RHLV1103PW.....	64	RRW600UBCCCV4.....	68
RRW600UBCCCV4.....	68	RRW600UTC.....	68
RRW600UTC.....	68	RRW600VTC.....	68
RRW600VTC.....	68	RT2BK.....	68
RT2BK.....	68	RT2DBCCV4.....	68
RT2DBCCV4.....	68	RT2GCCV4.....	68
RT2GCCV4.....	68	RT2I.....	68
RT2I.....	68	RT2LA.....	68
RT2LA.....	68	RT2NICCV4.....	68
RT2NICCV4.....	68	RT2W.....	68
RT2W.....	68	RWC826USBBKCCV2.....	72
RWC826USBBKCCV2.....	72	RWC826USBICCV2.....	72
RWC826USBICCV2.....	72	RWC826USBLACCv2.....	72
RWC826USBLACCv2.....	72	RWC826USBWCCV2.....	58, 72
RWC826USBWCCV2.....	58, 72	RWP26.....	79
RWP26.....	79	RWP26BK.....	79
RWP26BK.....	79	RWP26DBCC6.....	79
RWP26DBCC6.....	79	RWP26GRY.....	79
RWP26GRY.....	79	RWP26I.....	79
RWP26I.....	79	RWP26LA.....	79
RWP26LA.....	79	RWP26NICC6.....	79
RWP26NICC6.....	79	RWP26W.....	79
RWP26W.....	79	RWP262.....	79
RWP262.....	79	RWP262BK.....	79
RWP262BK.....	79	RWP262DBCC6.....	79
RWP262DBCC6.....	79	RWP262GRY.....	79
RWP262GRY.....	79	RWP262I.....	79
RWP262I.....	79	RWP262LA.....	79
RWP262LA.....	79	RWP262NICC6.....	79
RWP262NICC6.....	79	RWP262W.....	79
RWP262W.....	79	RWP263.....	79
RWP263.....	79	RWP263BK.....	79
RWP263BK.....	79	RWP263DBCC6.....	79
RWP263DBCC6.....	79	RWP263GRY.....	79
RWP263GRY.....	79	RWP263I.....	79
RWP263I.....	79	RWP263LA.....	79
RWP263LA.....	79	RWP263NICC6.....	79
RWP263NICC6.....	79	RWP263W.....	79
RWP263W.....	79	RWP264.....	79
RWP264.....	79	RWP264BK.....	79
RWP264BK.....	79	RWP264DB.....	79
RWP264DB.....	79	RWP264GRY.....	79
RWP264GRY.....	79	RWP264I.....	79
RWP264I.....	79	RWP264LA.....	79
RWP264LA.....	79	RWP264NI.....	79
RWP264NI.....	79	RWP264W.....	79
RWP264W.....	79	RWP265.....	79

RWP265BK.....	79
RWP265DB.....	79
RWP265GRY.....	79
RWP265I.....	79
RWP265LA.....	79
RWP265NI.....	79
RWP265W.....	79
RWP266.....	79
RWP266BK.....	79
RWP266DB.....	79
RWP266GRY.....	79
RWP266I.....	79
RWP266LA.....	79
RWP266NI.....	79
RWP266W.....	79
T	
TM8USB4BKCC6.....	72
TM8USB4ICC6.....	72
TM8USB4LACC6.....	72
TM8USB4NICC6.....	72
TM8USB4WCC6.....	59, 72
TM826USBBK.....	72
TM826USBBKCC6.....	72
TM826USBDDBCCV4.....	72
TM826USBGCCV4.....	72
TM826USBI.....	72
TM826USBICC6.....	72
TM826USBLA.....	72
TM826USBLACC6.....	72
TM826USBNICC6.....	72
TM826USBW.....	72
TM826USBWCC6.....	72
TM870.....	66
TM870BK.....	66
TM870DBCC10.....	66
TM870GCC10.....	66
TM870GRY.....	66
TM870I.....	66
TM870ISL.....	66
TM870ISL (lighted).....	66
TM870LA.....	66
TM870LASL.....	66
TM870LASL (lighted).....	66
TM870NICC10.....	66
TM870W.....	66
TM870WSL.....	55, 66
TM870WSL (lighted).....	66
TM873.....	66
TM873BK.....	66
TM873DBCC10.....	66
TM873GCC10.....	66
TM873GRY.....	66
TM873I.....	66
TM873ISL.....	66
TM873ISL (lighted).....	66
TM873I A.....	66

TM873LASL (lighted)	66
TM873NICC10	66
TM873W	66
TM873WSL	66
TM873WSL (lighted)	66
TM874	66
TM874BK	66
TM874DBCC6	66
TM874GCC6	66
TM874I	66
TM874ISL	66
TM874ISL (lighted)	66
TM874LA	66
TM874LASL	66
TM874LASL (lighted)	66
TM874NICC6	66
TM874W	66
TM874WSL	66
TM874WSL (lighted)	66
TR20USBPD	73
TR20USBPDBK	73
TR20USBPDDBCC6	73
TR20USBPDGCC6	73
TR20USBPDGRY	73
TR20USBPDI	73
TR20USBPDLA	73
TR20USBPDNICC6	73
TR20USBPDW	73
TR26352R	69
TR26352RBK	69
TR26352RDBCC6	69
TR26352RGCC6	69
TR26352RGRY	69
TR26352RI	69
TR26352RLA	69
TR26352RNICC6	69
TR26352RW	69

W

WNAH1G1	26
WNAH1M1	26
WNAH1W1	14, 26
WNAH2G1	26
WNAH2M1	26
WNAH2W1	26
WNAH10KITG1	27
WNAH10KITM1	27
WNAH10KITW1	27
WNAH15KITG1	27
WNAH15KITM1	27
WNAH15KITW1	27
WNAL10G1	26
WNAL10M1	26
WNAL10W1	14, 26
WNAL23G1	26
WNAL23M1	26
WNAL23W1	15, 26
WNAL33G1	25

WNAL33M1	25
WNAL33W1	15, 25
WNAL43G1	27
WNAL43M1	27
WNAL43W1	27
WNAL50G1	26
WNAL50M1	26
WNAL50W1	14, 26
WNAL63G1	26
WNAL63M1	26
WNAL63W1	26
WNAR153G1	27
WNAR153M1	27
WNAR153W1	15, 27
WNAR203G1	27
WNAR203M1	27
WNAR203W1	27
WNP10	27, 77
WNP20	27, 77
WNRH1LA	76
WNRH1NI	76
WNRH1WH	76
WNRH2LA	76
WNRH2NI	76
WNRH2WH	76
WNRH10KITLA	77
WNRH10KITNI	77
WNRH10KITWH	77
WNRH15KITLA	77
WNRH15KITNI	77
WNRH15KITWH	77
WNRL10LA	76
WNRL10NI	76
WNRL10WH	63, 76
WNRL23LA	76
WNRL23NI	76
WNRL23WH	76
WNRL33LA	77
WNRL33NI	77
WNRL33WH	63, 77
WNRL43LA	77
WNRL43NI	77
WNRL43WH	77
WNRL50LA	76
WNRL50NI	76
WNRL50WH	76
WNRL63LA	76
WNRL63NI	76
WNRL63WH	76
WNRR15LA	77
WNRR15NI	77
WNRR15WH	63, 77
WNRR20LA	77
WNRR20NI	77
WNRR20WH	77
WRR26USBAC6BK	73
WRR26USBAC6I	73
WRR26USBAC6LA	73

WRR26USBAC6W	73
WWP10CCV2	78
WWP20CCV2	78
WWP30CCV2	78
WWRL10LACCV2	78
WWRL10NICCV2	78
WWRL10WHCCV2	62, 78
WWRR15LACCV2	78
WWRR15NICCV2	78
WWRR15WHCCV2	62, 78
WWRL50LACCV2	78
WWRL50NICCV2	78
WWRL50WHCCV2	62, 78

