



TECHNICAL DATA SHEET

Beam clamps, heavy duty

Used with Kindorf® and Superstrut® channels



Beam clamps mounts channels below I-beams.

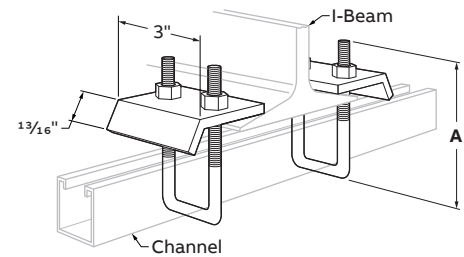
Features:

- Available for A, B & C Superstrut® channel, and A and B in Kindorf® channel in material finishes to suit the application

Ratings:

Design load rating installed in pairs as shown:

- U501 - 3,500 lbs
- U502 - 3,500 lbs
 - Factor of safety is 3.0

Materials / Finishes:

See local sales representative for custom finishes

- Material - Low carbon steel
- Standard finish - GoldGalv
- SilverGalv (EG)
- Hot dip galvanized
- Stainless steel (304)
- White powder coated

Conforms to:

- American standard code for pressure piping

Drawing	Product selection				
	Part no:	Material / Finishes	Channel part nos.		A
			Kindorf	Superstrut	
	U501	Low carbon steel / GoldGalv	B-900	A-1200	3 ³ / ₁₆ "
	U501 EG	Low carbon steel / SilverGalv	B-905	A-1400	
	U501 HDG	Low carbon steel / Hot dip galv	B-906	B-1200	
	U501 SS	Stainless steel (304) / none	B-907	B-1400	
	501WH	Low carbon steel / White powder coated (plate only)		B-1402 C-1200	
	U501EG-4INCH	Low carbon steel / SilverGalv	—	E-1200	4"
	U502	Low carbon steel / GoldGalv	B901	A-1202	4 ¹³ / ₁₆ "
	U502 EG	Low carbon steel / SilverGalv	B-902A	A-1402	
	U502 HDG	Low carbon steel / Hot dip galv	B-902	C-1202	
	U502 SS	Stainless steel (304) / none	B-903	H-1200	
				E-1200	