

Versatile Floodlight with hinged lens frame and Hydroformed reflector. Field adjustable vertical and horizontal lamp positions.

Color: Bronze Weight: 12.4 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info	Ballast Info		
Туре	ED17	Type	HX-HPF QT
Watts	70.00W	120V	.6/.9A
Shape/Size	N/A	208V	N/A
Base	N/A	240V	N/A
ANSI	N/A	277V	N/A
Hours	15,000	Input Watts	90.00W
Lamp Lumens	5,600	Efficiency	78%
Efficacy	62.2 LPW		

# **Technical Specifications**

## Listings

#### **UL Listing:**

Suitable for wet locations. Suitable for ground mounting.

### **EISA 2007 Compliant:**

This product complies with the new law for metal halide ballast efficiency. This law goes into effect January 1st, 2008. Pulse Start offers Longer Lamp Life, Faster Startup and Faster Restrike.

## Construction

### Housing:

Precision die cast aluminum. 1/2" NPS threaded arm with locking swivel.

## Reflector:

Hydroformed aluminum. Field adjustable vertical or horizontal.

### Lens Gasket:

High-temperature tubular silicone set in die cast retaining groove remains in place during relamping

#### Lens Frame:

Precision die cast aluminum. Hinged for easy access.

### Finish:

Formulated for high durability and long-lasting color

#### **Ground Mounting:**

Use the new MPM19 PVC Mighty Post with aluminum cap for sturdy installation

## EPA:

0.6

#### **Electrical**

## Socket:

Porcelain 4kv Pulse Rated socket with nickel plated screw shell

#### Quad Tap:

Fixture works with 120, 208, 240, and 277 volts


### Photocell:

Button Photocell 120V included. Photocell is only compatible with 120V.

#### Other

### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

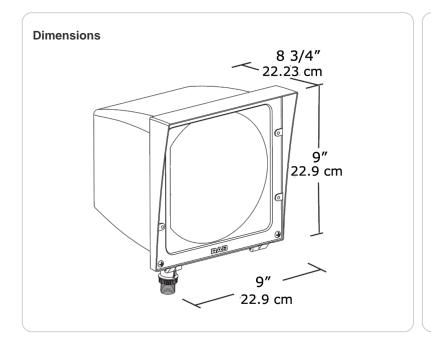

## **Features**

Fins for heat dissipation extend lamp & ballast title

Hinged lens frame is captive during relamping

Silicone gasket for durable weatherproofing

Hydroformed reflector is field adjustable to vertical or horizontal lamp positions

Long life lamp included

Precision die cast aluminum housing and lens frame with durable polyester powder coating

EZ Grip locknut matches fixture finish and can be adjusted with fingers pliers or a screwdriver