



Color: Bronze

Weight: 16.8 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

| | |
|-------------|----------|
| Type | ED17 |
| Watts | 150.00W |
| Shape/Size | N/A |
| Base | N/A |
| ANSI | N/A |
| Hours | 10,000 |
| Lamp Lumens | 12,500 |
| Efficacy | 67.6 LPW |

Ballast Info

| | |
|-------------|------------|
| Type | CWA-HPF QT |
| 120V | 1.1/1.6A |
| 208V | .6/.9A |
| 240V | .5/.8A |
| 277V | .5/.7A |
| Input Watts | 185.00W |
| Efficiency | 81% |

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from the ballast.

Construction

Housing:

Die cast aluminum, 1/2" NPS tapped holes top, both sides and back for conduit or photocontrol. Hinged refractor frame. Continuous silicone rubber gasket.

Reflector:

Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

Cutoff Lens:

Tempered glass

Finish:

Formulated for high durability and long-lasting color

Optical

Refractor:

Prismatic optics designed to minimize glare and throw light down and out. Heat resistant borosilicate glass.

Electrical

Quad Tap:


Fixture works with 120, 208, 240 and 277 Volts

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

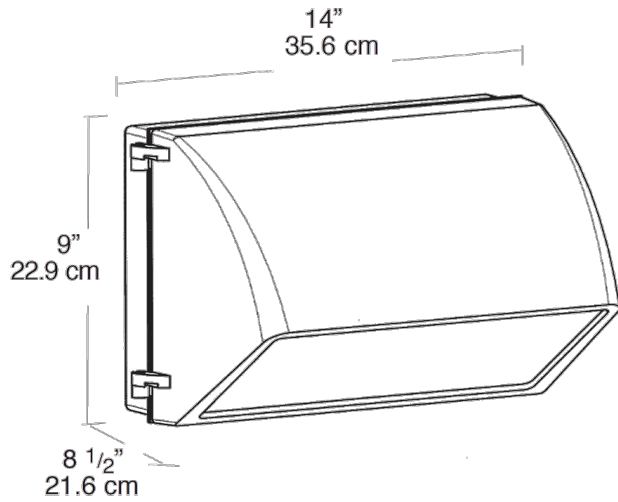

Features

- Precision die cast aluminum housing with durable polyester powder coating
- Tempered Glass Refractor and Tempered Glass Lens
- Drilling template for easy box mounting
- Silicone gasket remains in place during relamping
- Top, side and back conduit openings
- Cutoff Glare Shield for Friendly Lighting
- Long life lamp included