



Versatile Floodlight with hinged lens frame and Hydroformed reflector. Field adjustable vertical and horizontal lamp positions.

Color: Bronze

Weight: 11.1 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	ED17
Watts	50.00W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	10,000
Lamp Lumens	3,400
Efficacy	50 LPW

Ballast Info

Type	HX-HPF QT
120V	.6/.6A
208V	.35/.35A
240V	.3/.3A
277V	.25/.25A
Input Watts	68.00W
Efficiency	74%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

EISA 2007 Compliant:

This product complies with the new law for metal halide ballast efficiency. This law goes into effect January 1st, 2008. Pulse Start offers Longer Lamp Life, Faster Startup and Faster Restrike.

Construction

Housing:

Precision die cast aluminum. 1/2" NPS threaded arm with locking swivel.

Reflector:

Hydroformed aluminum. Field adjustable vertical or horizontal.

Lens Gasket:

High-temperature tubular silicone set in die cast retaining groove remains in place during relamping

Lens Frame:

Precision die cast aluminum. Hinged for easy access.

Finish:

Formulated for high durability and long-lasting color

Ground Mounting:

Use the new MPM19 PVC Mighty Post with aluminum cap for sturdy installation

EPA:

0.6

Electrical

Socket:

Porcelain 4kv Pulse Rated socket with nickel plated screw shell

Quad Tap:


Fixture works with 120, 208, 240 and 277 Volts

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

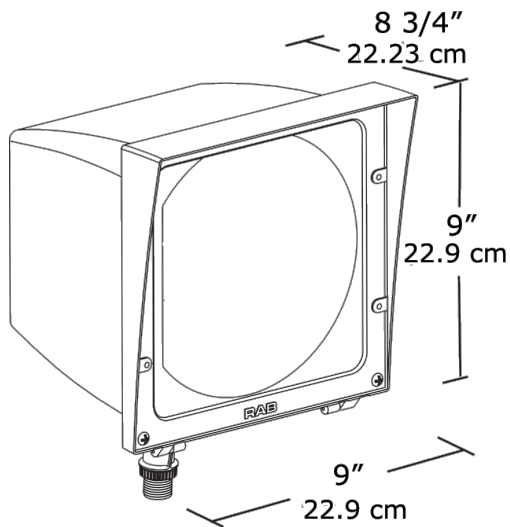

Features

- Fins for heat dissipation extend lamp & ballast title
- Hinged lens frame is captive during relamping
- Silicone gasket for durable weatherproofing
- Hydroformed reflector is field adjustable to vertical or horizontal lamp positions
- Long life lamp included
- Precision die cast aluminum housing and lens frame with durable polyester powder coating
- EZ Grip locknut matches fixture finish and can be adjusted with fingers pliers or a screwdriver