

XPSECME5131P

module XPSECME - increasing safety contacts - 24 V AC/DC

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 290.00 USD



Main

Commercial Status	Commercialised
Range of product	Preventa Safety automation
Product or component type	Preventa safety module
Safety module name	XPSECME
Safety module application	Increasing the number of safety contacts
Function of module	Increasing the number of safety contacts
Safety level	Can reach SILCL 3 conforming to EN/IEC 62061 can reach the maximum safety level of module base Can reach PL e/category 4 conforming to EN/ISO 13849-1 can reach the maximum safety level of module base
Safety reliability data	PFHd = 2E-7 1/h conforming to EN/IEC 62061 DC = 60...90 % conforming to EN/ISO 13849-1 MTTFd = 100 years conforming to EN/ISO 13849-1
Output type	Relay 4 NO, volt-free
[Us] rated supply voltage	24 V AC/DC (- 15...10 %)
Number of additional circuits	3 NC

Complementary

Supply frequency	50/60 Hz
Power consumption	<= 5 VA
Input protection type	Internal, electronic
Breaking capacity	B300: inrush 3600 VA AC-15 relay output B300: holding 360 VA AC-15 relay output
Breaking capacity	20 mA/24 V for solid state output circuit 1.5 A/24 V - L/R = 50 ms, DC-13 for relay output
Output thermal current	6 A per relay relay output
[Ith] conventional free air thermal current	< 12 A for relay output
Associated fuse rating	6 A gG for relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200
Minimum output current	10 mA for relay output
Minimum output voltage	17 V for relay output
Response time on input open	<= 20 ms
[Ui] rated insulation voltage	300 V, degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III, conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2
Local signalling	2 LEDs

Connections - terminals	Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.5...2 x 1.5 mm ² flexible cable with cable end, with double bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.25...2 x 1 mm ² flexible cable with cable end, without bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.2...2 x 1 mm ² flexible cable without cable end Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.2...2 x 1 mm ² solid cable without cable end Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.25...1 x 1.5 mm ² flexible cable with cable end, with bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.25...1 x 2.5 mm ² flexible cable with cable end, without bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.2...1 x 2.5 mm ² flexible cable without cable end Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.2...1 x 2.5 mm ² solid cable without cable end
Mounting support	35 mm symmetrical DIN rail
Product weight	0.6 lb(US) (0.27 kg)

Environment

Standards	EN/IEC 60204-1 EN/IEC 60947-5-1
Product certifications	BG CSA UL
IP degree of protection	IP40(Enclosure) conforming to EN/IEC 60529 IP20(Terminals) conforming to EN/IEC 60529
Ambient air temperature for operation	-13...131 °F (-25...55 °C)
Ambient air temperature for storage	-13...167 °F (-25...75 °C)


Ordering and shipping details

Category	22477 - SAFETY MODULES (PREVENTA)
Discount Schedule	SAF2
GTIN	00785901524328
Nbr. of units in pkg.	1
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	DE

Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

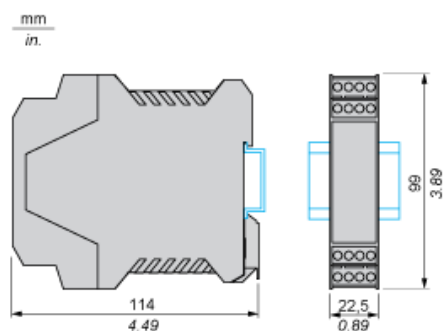

Wiring Diagrams

Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:

The screenshot shows the Schneider Electric website interface for the XPSAC5121 module. On the left, a sidebar titled "Discover XPSAC5121 by" lists several categories: Characteristics, Dimensions Drawings, Connections and Schema, Technical Description, and Download & Documents. The "Download & Documents" category is highlighted with a red box and a circled number 1. The main content area displays the product name "XPSAC5121" and its description "module XPSAC - Emergency stop - 24 V AC DC". Below this, there is a link to "Download XPSAC5121 product datasheet". A table titled "Download & Documents 1 to 3 of 3 (Total: -1)" lists three documents: "Instruction sheet", "Image of product", and "Certificate". The "Instruction sheet" document is highlighted with a red box and a circled number 2. It shows the title "XPSAC... Safety module for emergency stop and switch monitoring", the language "English", the date "2012-07-04", and a download button labeled "pdf (29)".

Discover XPSAC5121 by

- Characteristics
- Dimensions Drawings
- Connections and Schema
- Technical Description
- Download & Documents

XPSAC5121
module XPSAC - Emergency stop - 24 V AC DC

Download XPSAC5121 product datasheet

Download & Documents 1 to 3 of 3 (Total: -1)

Instruction sheet		
XPSAC... Safety module for emergency stop and switch monitoring	English 2012-07-04	pdf (29)

Image of product

Emergency stop and switch monitoring	2010-11-10	(Select :)
--------------------------------------	------------	------------

Certificate

Russian certificate	English 2010-07-07	pdf (60)
---------------------	--------------------	----------

1 Click on Download & Documents.

2 Click on Instruction sheet.