



Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	5.12 in (130 mm)
IP degree of protection	IP66 IEC 60529 resistant to vibration)
[Us] rated supply voltage	24 V DC
Light source	High luminosity LED, orange

Complementary

Material	ABS (acrylonitrile butadiene-styrene) body part PC globe
CAD overall width	5.12 in (130 mm)
CAD overall depth	5.12 in (130 mm)
Net Weight	1.76 lb(US) (0.8 kg)
Marking	CE
Product mounting	By 3 M8 screws
Supply voltage limits	19...30 V DC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	125 mA
Flashing frequency	2.7 Hz
Clamping connection capacity	1.25 mm ²
AWG gauge	AWG 18
Cable length	15.75 in (400 mm)

Environment

Standards	EN 61000-6-2 EN 61000-6-4
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	-22...122 °F (-30...50 °C)
Electrical shock protection class	Class II IEC 61140

Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901686323
Nbr. of units in pkg.	1
Package weight(Lbs)	2.6 lb(US) (1.18 kg)
Returnability	No
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	10.43 in (26.5 cm)
Package 1 width	7.40 in (18.8 cm)
Package 1 Length	7.40 in (18.8 cm)
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Weight	18.60 lb(US) (8.438 kg)
Package 2 Height	11.81 in (30 cm)
Package 2 width	15.75 in (40 cm)
Package 2 Length	23.62 in (60 cm)

Offer Sustainability


EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------

Rotating Mirror Beacon

Dimensions

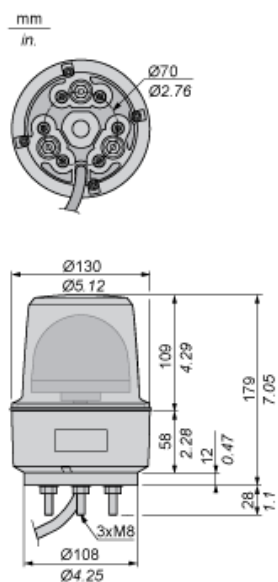

Rotating Mirror Beacon

Panel Cut-out

