

Product data sheet

Characteristics

XVC6M4K

Monolithic tower light, red-orange-green-blue,
60mm, base mounting, steady, without buzzer,
IP54, 100...240 V AC



Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	4 illuminated units
Sound signalling	Without
Mounting diameter	2.36 in (60 mm)
Component name	XVC
Light source	LED steady red LED steady orange LED steady green LED steady blue
[Us] rated supply voltage	100...240 V
Supply circuit type	AC

Complementary

Material	Polycarbonate illuminated unit ABS (acrylonitrile butadiene-styrene) base unit PBT + ABS (UL94-V0) top cover
Product mounting	On base
Cable cross section	0.00 in ² (0.83 mm ²) 0.00 in ² (0.33 mm ²)
AWG gauge	AWG 22 AWG 18
Cable length	29.53 in (750 mm) 33.46 in (850 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	75 mA
Net Weight	1.32 lb(US) (0.6 kg)
Maximum Height	13.86 in (352 mm)

Environment

Standards	EN/IEC 60947-5-1 EN/IEC 60947-1
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class I EN/IEC 61140
IP degree of protection	IP54 flat surface installation EN/IEC 60529

Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901395751
Nbr. of units in pkg.	1
Package weight(Lbs)	1.67 lb(US) (0.76 kg)

Returnability	No
Country of origin	ID

Packing Units

Package 1 Height	0.830 dm
Package 1 width	0.830 dm
Package 1 Length	5.000 dm

Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Contractual warranty

Warranty	18 months
----------	-----------

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

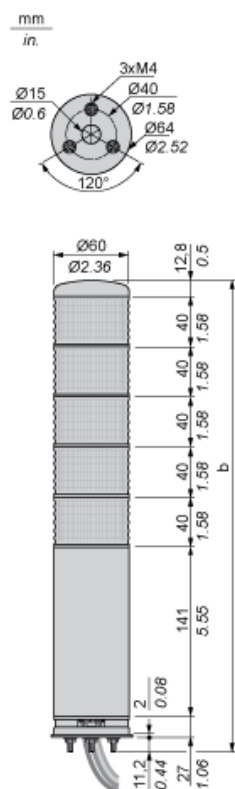

No. of illuminated units	b (mm)	b (in.)
1 stage	232	9.13
2 stages	272	10.71
3 stages	312	12.28
4 stages	352	13.86
5 stages	392	15.43

Pre-assembled and Pre-wired Tower Light

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

