

# XVC6M25SK

Monolithic tower light, red-orange, 60mm, base mounting, steady or flashing, with buzzer 70...85 dB, IP54, 100...240 V AC



## Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	2 illuminated units
Sound signalling	Buzzer
Mounting diameter	2.36 in (60 mm)
Component name	XVC
Light source	LED steady or flashing red LED steady or flashing orange
[Us] rated supply voltage	100...240 V
Supply circuit type	AC
Noise level	70...85 dB continuous or intermittent tone)1 m

## Complementary

Material	Polycarbonate illuminated unit ABS (acrylonitrile butadiene-styrene) base unit PBT + ABS (UL94-V0) top cover
Product mounting	On base
Cable cross section	0.00 In <sup>2</sup> (0.33 mm <sup>2</sup> ) 0.00 in <sup>2</sup> (0.83 mm <sup>2</sup> )
AWG gauge	AWG 18 AWG 22
Cable length	33.46 In (850 mm) 29.53 in (750 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	75 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Net Weight	1.21 lb(US) (0.55 kg)
Maximum Height	10.71 in (272 mm)

## Environment

Standards	EN/IEC 60947-5-1 EN/IEC 60947-1
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class I EN/IEC 61140
IP degree of protection	IP54 flat surface installation EN/IEC 60529

## Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901395874
Nbr. of units in pkg.	1
Package weight(Lbs)	1.58 lb(US) (0.72 kg)
Returnability	No
Country of origin	ID

## Packing Units

Package 1 Height	0.850 dm
Package 1 width	0.850 dm
Package 1 Length	5.100 dm

## Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


## Contractual warranty

Warranty	18 months
----------	-----------

## Pre-assembled and Pre-wired Tower Light

### Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

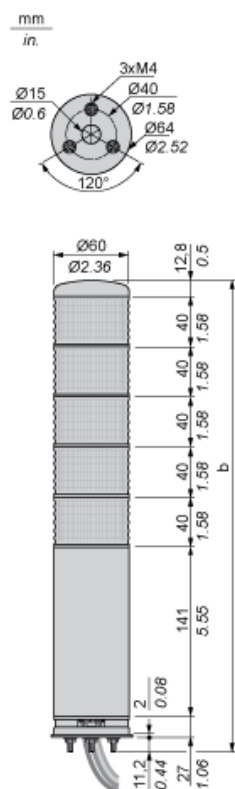

No. of illuminated units	b (mm)	b (in.)
1 stage	232	9.13
2 stages	272	10.71
3 stages	312	12.28
4 stages	352	13.86
5 stages	392	15.43

---

Pre-assembled and Pre-wired Tower Light

---

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

