



### Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	4.72 in (120 mm)
IP degree of protection	IP23 IEC 60529
[Us] rated supply voltage	12 V AC/DC
Light source	High luminosity LED, blue

### Complementary

Material	ABS (acrylonitrile butadiene-styrene) body part AS globe
CAD overall width	4.72 in (120 mm)
CAD overall depth	4.72 in (120 mm)
Net Weight	1.10 lb(US) (0.5 kg)
Marking	CE
Product mounting	By 3 M5 screws
Supply voltage limits	10...15 V DC 10.8...13.2 V AC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	250 mA
Flashing frequency	2.3 Hz
Clamping connection capacity	0.83 mm <sup>2</sup>
AWG gauge	AWG 18
Cable length	15.75 in (400 mm)

### Environment

Standards	EN 61000-6-4 EN 61000-6-2
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class II IEC 61140

### Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901556268
Nbr. of units in pkg.	1
Package weight(Lbs)	1.29 lb(US) (0.59 kg)
Returnability	No
Country of origin	JP

## Packing Units

Package 1 Height	1.400 dm
Package 1 width	1.400 dm
Package 1 Length	1.900 dm

## Offer Sustainability


EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Contractual warranty

Warranty	18 months
----------	-----------

## Rotating Mirror Beacon

### Dimensions

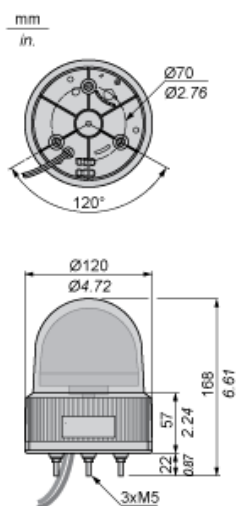

---

Rotating Mirror Beacon

---

Panel Cut-out

