



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Complementary

Electrical connection	Elbowed female connector M8, 3 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	2 PNP LEDs
Cable length	6.56 ft (2 m)
Cable outer diameter	0.18 in (4.6 mm)
Cable composition	3 x 0.25 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	30 V AC 36 V DC
Line Rated Current	3 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net Weight	0.20 lb(US) (0.09 kg)

Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-13...176 °F (-25...80 °C) static
Ambient air temperature for storage	-13...176 °F (-25...80 °C)



Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	00785901395201
Nbr. of units in pkg.	1
Package weight(Lbs)	1 lb(US) (0.45 kg)
Returnability	No
Country of origin	PL

Packing Units

Package 1 Height	1.18 in (3.000 cm)
Package 1 width	6.69 in (17.000 cm)
Package 1 Length	6.69 in (17.000 cm)


Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP) and Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to www.p65warnings.ca.gov
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

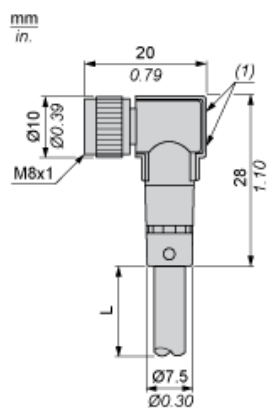


L : Length of cable

(1) 2 LEDs limited to 10...30 VDC max.

Connections and Schemes


Connector



BU : Blue
BN : Brown
BK : Black

Connections and Schemes

LED Connection



BN : Brown
BK : Black
BU : Blue
GN : Green
YW : Yellow
(1) Signal