


# SLPSXCV2

Sensor, SpaceLogic SLP Series, air quality, CO2, VOC, humidity, temperature, room, BACnet MSTP/Modbus, matte white housing

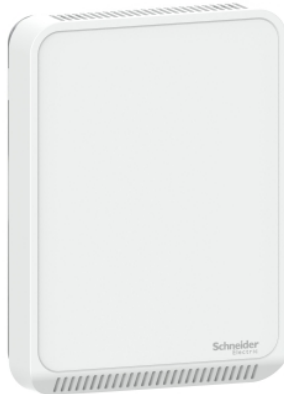

## Main

Range	SpaceLogic
Product or Component Type	Sensor
Product name	SpaceLogic Room Unit
Type of measurement	Carbon Dioxide (CO2) Volatile Organic Compounds (VOC) Humidity Temperature
Device Application	HVAC Temperature control Fan speed controller
Product Specific Application	Indoor air quality control Humidity control
Product certifications	CE EN 61000-6-2 CE EN 61000-6-3 CE EN 61326-1 RCM EAC ICES-003 CULus
Communication Port Protocol	BACnet Modbus
Display Type	Without Display
Location	Living Space
Mounting Support	Wall Mount
Depth	0.94 in (24 mm)
Height	3.35 in (85 mm)
Width	4.53 in (115 mm)
Network Frequency	50 Hz 60 Hz
Ambient Air Temperature for Operation	32...122 °F (0...50 °C)
Standards	UL 916 FCC Part 15 class B
Calibration Certificate	Humidity: replaceable RH element available in 1% & 2% with NIST
Color	White
Sensor Type	Transmitter NDIR (non-dispersive infrared) VOC transmitter Thin-film capacitive
[Us] Rated Supply Voltage	24 V AC 20...30 V DC
Device presentation	Complete product
Surface Finish	Matte

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Complementary

Material	ABS (acrylonitrile butadiene-styrene)
Function Available	With temperature sensor With CO2 sensor With VOC (volatile organic compounds) sensor With humidity sensor
Hysteresis	1.5 %
Repeat accuracy	+/- 20 ppm
Connections - terminals	Screw terminal - 2 AWG 24...AWG 18)
Range compatibility	EcoStruxure Building Operation SmartX Room Purpose Controller programmable controllers

## Environment

Humidity setting range	0...100 %
Temperature setting range	50...95 °F (10...35 °C) 32...122 °F (0...50 °C)


## Ordering and shipping details

GTIN	3606481900876
------	---------------

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.89 in (4.8 cm)
Package 1 Width	3.81 in (9.67 cm)
Package 1 Length	5.51 in (14.0 cm)
Package 1 Weight	6.41 oz (181.82 g)

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 <a href="#">Yes</a>
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	 <a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.