

# H364SS

Safety switch, heavy duty, fusible, 200A, 3 poles, 150hp, 600VAC/600 NDC, NEMA 4, 4X, 5, 316 steel,



## Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	None
Phase	3 phase
Number of Poles	3
Current Rating	200 A
Voltage Rating	600 V AC/DC
Enclosure Rating	NEMA 4/4X/5 stainless steel 316
Motor power hp	50 Hp at 480 V AC 50-60 Hz for 3 phase motors 125 Hp at 480 V AC 50-60 Hz for 3 phase motors 60 Hp at 600 V AC 50-60 Hz for 3 phase motors 150 Hp at 600 V AC 50-60 Hz for 3 phase motors 50 hp at 600 V DC

## Complementary

Short Circuit Current Rating	10 KA H or K 200 kA R or J
Fuse type	H or K R or J
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	3-wire
Wire Size	AWG 6...250 kcmil copper or aluminium
Tightening torque	275 lbf.in (31.07 N.m) 0.02...0.20 in <sup>2</sup> (13.3...127 mm <sup>2</sup> ) (AWG 6...250 kcmil)
Depth	8.88 in (225.55 mm)
Width	19.25 in (488.95 mm)
Height	29 in (736.60 mm)
Net Weight	56.99 lb(US) (25.85 kg)

## Environment

Certifications	UL listed file E2875
----------------	----------------------

## Ordering and shipping details

Category	00010-H&HU SW,2&3P,N4,SS,30-200A
Discount Schedule	DE1
GTIN	785901675792
Returnability	No
Country of origin	US

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	30.00 in (76.2 cm)
Package 1 Width	8.31 in (21.112 cm)
Package 1 Length	19.25 in (48.895 cm)
Package 1 Weight	57.00 lb(US) (25.855 kg)


## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
PVC free	Yes


## Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

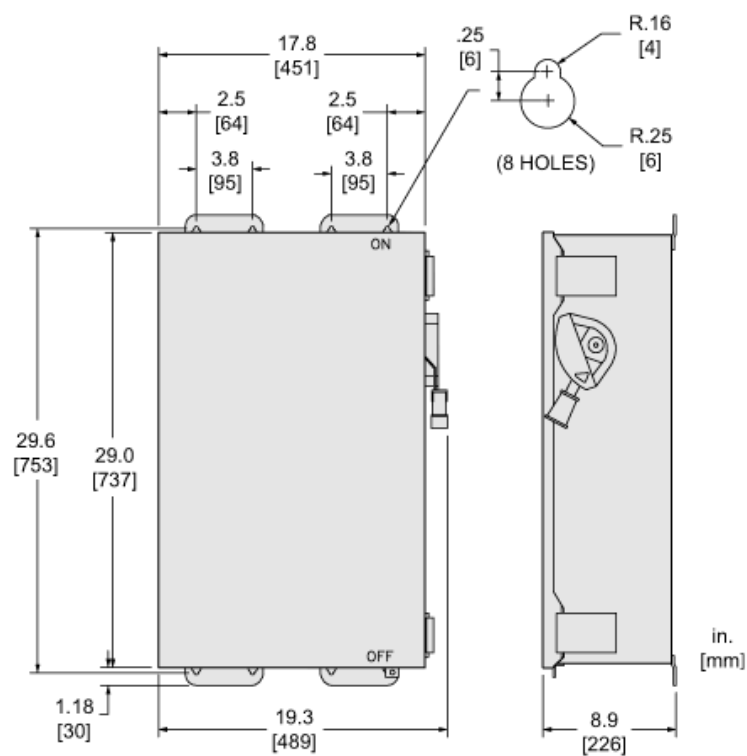

Connections and Wiring Diagrams

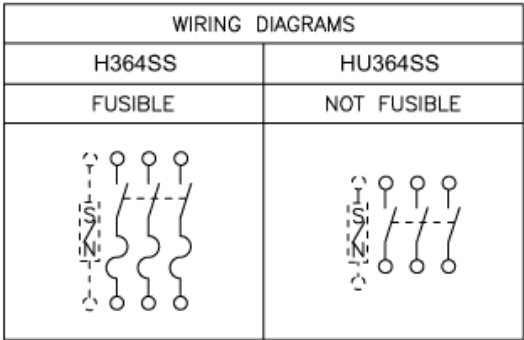

TERMINAL LUG DATA ‡			
AMPERES	MAX WIRE	MIN WIRE	TYPE
200	250 KCMIL	#6 AWG	CU/AL

‡ LUGS SUITABLE FOR 75°C CONDUCTORS.